

Magnetic fluid lubrication of porous pivoted slider bearing with slip and squeeze velocity

Rajesh C. Shah *[†], Dilip B. Patel ‡

Abstract

In this paper the problem on "Magnetic fluid lubrication of porous-pivoted slider bearing with slip velocity by Ahmad *et al.* (N. Ahmad, J. P. Singh, Magnetic fluid lubrication of porous-pivoted slider bearing with slip velocity, Journal of Engineering Tribology, 2007)" has been recapitulated using Jenkin's model (J. T. Jenkins, A Theory of magnetic fluids, Archive for Rational Mechanics and Analysis, 1972) with the additional effect of squeeze velocity of the above plate. It is found that while discussing the above problem, (N. Ahmad, J. P. Singh, Magnetic fluid lubrication of porous-pivoted slider bearing with slip velocity, Journal of Engineering Tribology, 2007) has stated but ignored the term $\rho\alpha^2\nabla \times \left(\frac{\mathbf{M}}{M} \times \mathbf{M}^*\right)$, where $\mathbf{M}^* = \frac{D\mathbf{M}}{Dt} + \frac{1}{2}(\nabla \times \mathbf{q}) \times \mathbf{M}$, in their study (Refer equation (2.2)). This paper reconsiders the above neglected term with $\mathbf{M}^* = \frac{1}{2}(\nabla \times \mathbf{q}) \times \mathbf{M}$, where $\mathbf{M} = \bar{\mu}\mathbf{H}$. Since \mathbf{M}^* is the corotational derivative of magnetization vector, so it has an impact on the performance of the problem (P. Ram, P. D. S. Verma, Ferrofluid lubrication in porous inclined slider bearing, Indian Journal of Pure and Applied Mathematics, 1999). With the addition of the above term and under an oblique magnetic field, it is found that the dimensionless load carrying capacity can be improved substantially with and without squeeze effect. The paper also studied in detail about the effects of squeeze velocity and sliding velocity. It is observed that dimensionless load carrying capacity increases when squeeze velocity increases and sliding velocity decreases.

Keywords : Magnetic fluid; Slider bearing; Slip velocity; Squeeze velocity; Jenkin's model.

1 Introduction

Magnetic fluids or Ferrofluids [15] are stable colloidal suspensions containing fine ferromagnetic particles which are dispersing in a liquid, called carrier liquid (in our case water), in which a surfactant is added to generate a coating layer preventing the flocculation of the particles. When an external magnetic field is applied, fer-

rofluids experience magnetic body forces which depend upon the magnetization of ferromagnetic particles. Owing to these features ferrofluids are useful in many applications, for example [5]. Agrawal [16] studied magnetic fluid based porous inclined slider bearing using Neuringer-Rosensweig's model. Shah and Bhat in [13, 14] considered respectively squeeze film and slider bearing in their study using Neuringer-Rosensweig's model. Recently Ahmad *et al.* [7] studied "Magnetic fluid lubrication of porous-pivoted slider bearing with slip velocity" and they have ignored the term $\rho\alpha^2\nabla \times \left(\frac{\mathbf{M}}{M} \times \mathbf{M}^*\right)$, where $\mathbf{M}^* = \frac{D\mathbf{M}}{Dt} + \frac{1}{2}(\nabla \times \mathbf{q}) \times \mathbf{M}$ in the governing system of equations. In this paper we have recapitulated

*Corresponding author. dr_rcshah@yahoo.com

[†]Department of Applied Mathematics, Faculty of Technology and Engineering, The M. S. University of Baroda, Vadodara 390 001, Gujarat State, India.

[‡]Department of Mathematics, Sankalchand Patel College of Engineering, Visnagar 384 315, Gujarat State, India.

the above problem [7] including the ignored term which is given by Jenkin's [4] and worked on by Ram and Verma [9], Shah and Bhat [11] in their study from different view point.

With the addition of the above term and under an oblique magnetic field, it is found that the dimensionless load carrying capacity can be improved substantially with and without squeeze effect. The paper also studied in detail about the effects of squeeze velocity and sliding velocity. It is observed that dimensionless load carrying capacity increases when squeeze velocity increases and sliding velocity decreases.

2 The Mathematical Model

The configuration of the porous-pivoted slider bearing with squeeze velocity is displayed in Figure 1 consists of a slider having a convex pad surface of length A (metres) with central thickness H_c (metres) and moving with uniform velocity U (ms^{-1}) in the x -direction. The stator has a porous matrix with uniform thickness l_2 (metres) backed by a solid wall. The porous flat lower plate is normally approached by the upper plate with a uniform velocity $\dot{h} = dh/dt$, where h (metres) is the central film thickness and t is time in second. The expression for the central film thick-

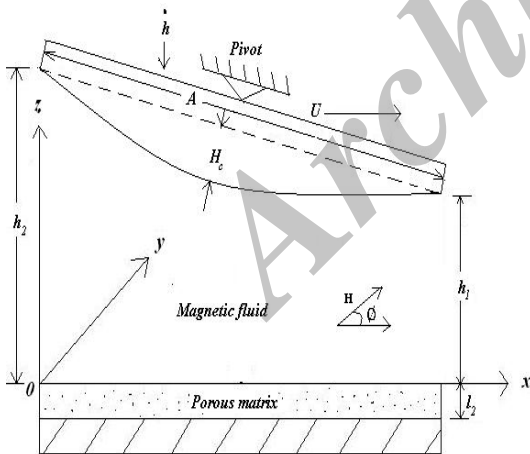


Figure 1: Porous-pivoted slider bearing with a convex pad surface

ness h (metres) is given by [7, 11]

$$h = H_c \left\{ 4 \left(\frac{x}{A} - \frac{1}{2} \right)^2 - 1 \right\} + h_1 \left\{ a - \frac{a}{A}x + \frac{x}{A} \right\}, \tag{2.1}$$

with $a = \frac{h_2}{h_1}$; h_2 (metres) and h_1 (metres) are maximum and minimum film thickness respectively.

The above bearing is lubricated with water based ferrofluid and the equations governing the flow of ferrofluid by Jenkin's model [4, 7, 11] are

$$\rho \left\{ \frac{\partial \mathbf{q}}{\partial t} + (\mathbf{q} \cdot \nabla) \mathbf{q} \right\} = -\nabla p + \eta \nabla^2 \mathbf{q} + \mu_0 (\mathbf{M} \cdot \nabla) \mathbf{H} + \rho \alpha^2 \nabla \times \left(\frac{\mathbf{M}}{M} \times \mathbf{M}^* \right), \tag{2.2}$$

$$\nabla \cdot \mathbf{q} = 0, \tag{2.3}$$

$$\nabla \times \mathbf{H} = 0, \tag{2.4}$$

$$\nabla \cdot (\mathbf{H} + 4\pi \mathbf{M}) = 0, \tag{2.5}$$

$$\gamma \frac{D^2 \mathbf{M}}{Dt^2} = -4\pi \rho \frac{M_s}{\mu_0} \frac{\mathbf{M}}{M_s - M} - \frac{2\alpha^2}{M} \mathbf{M}^* + \mathbf{H}, \tag{2.6}$$

with

$$\mathbf{M}^* = \frac{D\mathbf{M}}{Dt} + \frac{1}{2} (\nabla \times \mathbf{q}) \times \mathbf{M}. \tag{2.7}$$

where ρ , p , η , \mathbf{q} , μ_0 , \mathbf{M} , \mathbf{H} , M , \mathbf{M}^* , α^2 , μ_0 , M_s , γ are fluid density, film pressure, fluid viscosity, fluid velocity, free space permeability, the magnetization vector, magnetic field vector, magnitude of magnetization vector, corotational derivative of \mathbf{M} , material constant, initial susceptibility of fluid, the saturation magnetization and another material constant of Jenkin's model respectively.

In the present discussion, equation (2.6) is replaced by

$$\mathbf{M} = \bar{\mu} \mathbf{H} \quad (\bar{\mu} \text{ is magnetic susceptibility}), \tag{2.8}$$

as suggested by Maugin [1] and

$$\mathbf{M}^* = \frac{1}{2} (\nabla \times \mathbf{q}) \times \mathbf{M}. \tag{2.9}$$

The lubricant is ferrofluid, so a magnetic field vector \mathbf{H} is applied such that it is inclined at an angle ϕ as shown in Figure 1 with the stator and vanishes at the ends of the bearing. The angle

ϕ is determined in Shah and Bhat [11] and the magnitude H of magnetic field is given by

$$H^2 = Kx(A - x), \tag{2.10}$$

where K being a quantity chosen to suit the dimensions of both sides of equation (2.10).

The equation of continuity in the film region is

$$\frac{\partial u}{\partial x} + \frac{\partial w}{\partial z} = 0, \tag{2.11}$$

where u and w are components of film fluid velocity in x -direction and z -direction respectively.

The equation of continuity in porous region is

$$\frac{\partial \bar{u}}{\partial x} + \frac{\partial \bar{w}}{\partial z} = 0, \tag{2.12}$$

where \bar{u} and \bar{w} are components of fluid velocity in the porous region in x -direction and z -direction respectively.

Referring the work of Agrawal [16] and Shah et. al. [11], using equations (2.2) to (2.9), one obtains

$$\frac{\partial^2 u}{\partial z^2} = \frac{1}{\eta \left(1 - \frac{\rho\alpha^2 \bar{\mu} H}{2\eta}\right)} \frac{\partial}{\partial x} \left(p - \frac{1}{2} \mu_0 \bar{\mu} H^2 \right). \tag{2.13}$$

The velocity components of fluid in the porous region are

$$\bar{u} = -\frac{\varphi}{\eta} \left\{ \frac{\partial}{\partial x} \left(P - \frac{1}{2} \mu_0 \bar{\mu} H^2 \right) + \frac{\rho\alpha^2}{2} \bar{\mu} \frac{\partial}{\partial z} \left(H \frac{\partial u}{\partial z} \right) \right\}, \tag{2.14}$$

$$\bar{w} = -\frac{\varphi}{\eta} \left\{ \frac{\partial}{\partial z} \left(P - \frac{1}{2} \mu_0 \bar{\mu} H^2 \right) - \frac{\rho\alpha^2}{2} \bar{\mu} \frac{\partial}{\partial x} \left(H \frac{\partial u}{\partial z} \right) \right\}, \tag{2.15}$$

where φ and P are permeability and fluid pressure in the porous region respectively.

Substituting equations (2.14) and (2.15) into equation (2.12), one obtains

$$\frac{\partial^2}{\partial x^2} \left(P - \frac{1}{2} \mu_0 \bar{\mu} H^2 \right) + \frac{\partial^2}{\partial z^2} \left(P - \frac{1}{2} \mu_0 \bar{\mu} H^2 \right) = 0, \tag{2.16}$$

which on integration with respect to z across the porous region $(-l_2, 0)$, yields

$$\left. \frac{\partial}{\partial z} \left(P - \frac{1}{2} \mu_0 \bar{\mu} H^2 \right) \right|_{z=0} = -l_2 \frac{\partial^2}{\partial x^2} \left(p - \frac{1}{2} \mu_0 \bar{\mu} H^2 \right), \tag{2.17}$$

using Morgan-Cameron approximation [3, 11, 12] and that the surface $z = -l_2$ is non-porous.

The relevant boundary conditions for the velocity field [2] in the lubricant region is

$$u = \frac{1}{s} \frac{\partial u}{\partial z} \text{ at } z = 0, \tag{2.18}$$

and

$$u = U \text{ at } z = h, \tag{2.19}$$

where $\frac{1}{s} = \frac{\sqrt{\varphi}}{k}$; s is slip parameter and k is slip coefficient, which depends on the structure of the porous material.

Solving equation (2.13) with boundary conditions (2.18) and (2.19), one obtains

$$u = \frac{1}{2\eta \left(1 - \frac{\rho\alpha^2 \bar{\mu} H}{2\eta}\right)} \left\{ z^2 - \frac{sh^2 z}{(sh + 1)} - \frac{h^2}{(sh + 1)} \right\} \frac{\partial}{\partial x} \left(p - \frac{1}{2} \mu_0 \bar{\mu} H^2 \right) + \frac{U(sz + 1)}{(sh + 1)}. \tag{2.20}$$

Integrating continuity equation (2.11) in film region over $(0, h)$, one obtains

$$\frac{\partial}{\partial x} \int_0^h u \, dz + w_h - w_0 = 0. \tag{2.21}$$

Using $w_h = V = -\dot{h}$ because of squeeze velocity is in the downward direction and $w_0 = w|_{z=0} = \bar{w}|_{z=0}$ because of continuity of velocity component at $z = 0$ of film region and porous region respectively, equations (2.17), (2.20), (2.21), gives

$$\frac{d}{dx} \left\{ g \frac{d}{dx} \left(p - \frac{1}{2} \mu_0 \bar{\mu} H^2 \right) \right\} = \frac{df}{dx}, \tag{2.22}$$

where

$$g = 12\varphi l_2 + \frac{h^3(sh + 4) - \left(\frac{3\rho\alpha^2 \bar{\mu} \varphi sh^2 H}{\eta} \right)}{(sh + 1) \left(1 - \frac{\rho\alpha^2 \bar{\mu} H}{2\eta} \right)}$$

and

$$f = \frac{6\eta U h (sh + 2) - 6U \rho \alpha^2 \bar{\mu} \varphi s H}{(sh + 1)} + 12\eta V x.$$

Equation (2.22) is known as Reynolds’s equation.

Introducing following dimensionless quantities

$$\begin{aligned}
 X &= \frac{x}{A}, \quad \bar{h} = \frac{h}{h_1}, \quad \bar{s} = sh_1, \quad \bar{p} = \frac{ph_1^2}{\eta AU}, \\
 \mu^* &= \frac{\mu_0 \bar{\mu} h_1^2 AK}{\eta U}, \quad \beta^2 = \frac{\rho \alpha^2 \bar{\mu} A \sqrt{K}}{2\eta}, \\
 \bar{\varphi} &= \frac{12\varphi l_2}{h_1^3}, \quad S = -\frac{2VA}{Uh_1}, \quad \gamma^* = \frac{6\varphi}{h_1^2}, \quad (2.23)
 \end{aligned}$$

the dimensionless form of equation (2.22) is

$$\frac{d}{dX} \left\{ G \frac{d}{dX} \left(\bar{p} - \frac{1}{2} \mu^* X(1-X) \right) \right\} = \frac{dE}{dX}, \quad (2.24)$$

where

$$G = \bar{\varphi} + \frac{\bar{h}^3(\bar{s}\bar{h} + 4) - \beta^2 \gamma^* \bar{s} \bar{h}^2 \sqrt{X(1-X)}}{(\bar{s}\bar{h} + 1)[1 - \beta^2 \sqrt{X(1-X)}]},$$

$$E = \frac{6\bar{h}(\bar{s}\bar{h} + 2) - 2\beta^2 \gamma^* \bar{s} \sqrt{X(1-X)}}{(\bar{s}\bar{h} + 1)} - 6SX,$$

which is known as dimensionless form of Reynolds’s equation. Solving equation (2.24) for pressure under the appropriate boundary conditions

$$\bar{p} = 0 \text{ at } X = 0, 1,$$

yields

$$\bar{p} = \frac{1}{2} \mu^* X(1-X) + \int_0^X \left(\frac{E-Q}{G} \right) dX, \quad (2.25)$$

where

$$Q = \frac{\int_0^1 \frac{E}{G} dX}{\int_0^1 \frac{1}{G} dX}.$$

The dimensionless form of equation (2.1) is

$$\bar{h} = lX^2 + mX + n, \quad (2.26)$$

where

$$l = 4\delta, \quad m = -(4\delta + a - 1), \quad n = a; \quad \delta = \frac{H_c}{h_1}. \quad (2.27)$$

The dimensionless form of load carrying capacity using (2.25) can be obtained as

$$\bar{W} = \int_0^1 \bar{p} dX = \frac{\mu^*}{12} - \int_0^1 \left(\frac{E-Q}{G} \right) X dX. \quad (2.28)$$

3 Results and Discussion

The problem on "Magnetic fluid lubrication of porous-pivoted slider bearing with slip velocity by [7]" is recapitulated here for its optimum performance.

During the course of investigation it is observed from equation (2.13) that a constant magnetic field does not enhance the bearing characteristics in Rosensweig’s model as well as in Jenkin’s model of ferrofluid flow.

The values of the dimensionless load carrying capacity \bar{W} has been calculated for the following values [6] of the parameters using Simpson’s 1/3 rule with step size 0.1.

$$h_1 = 0.000005(m), \quad h_2 = 0.00001(m),$$

$$\bar{\mu} = 0.05, \quad A = 0.02(m), \quad k = 0.1,$$

$$\eta = 0.012(Kgm^{-1}s^{-1}), \quad \rho = 1400(Kgm^{-3}),$$

$$\mu_0 = 4\pi \times 10^{-7}(Kgm s^{-2} A^{-2}),$$

$$H_c = 0.0000015(m), \quad l_2 = 0.0001(m).$$

The ferrofluid used here is water based. The magnetic field considered here is oblique to the stator and its strength is of $O(10^3)$ in order to get maximum magnetic field at $x = A/2$ for the calculation of \bar{W} in Figure 10. For remaining figures, magnetic field strength is indicated there. The calculation of magnetic field strength is shown below [10]: From equation (2.10),

$$H^2 = Kx(A-x)$$

$$Max H^2 = 10^{-4}K,$$

$$For H = O(10^3), \quad K = O(10^{10}).$$

The calculated values of \bar{W} are presented graphically as shown in Figures 2 to 10 for various cases.

Figure 2 and 3 indicates the study of the effect of squeeze velocity ($\dot{h} \neq 0$) when $\alpha^2 \neq 0$ (Jenkin’s model) and $\alpha^2 = 0$ (Rosensweig’s model) respectively with respect to order of magnetic field

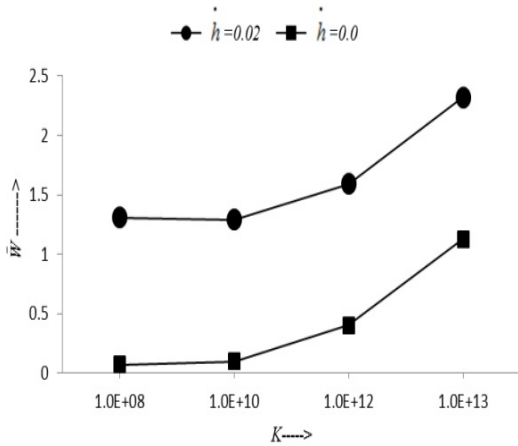


Figure 2: Values of \bar{W} for various values of K when $\alpha^2 = 0.0001(m^3A^{-1}s^{-1})$, $\varphi = 10^{-12}(m^2)$ and $U = 6.28(ms^{-1})$

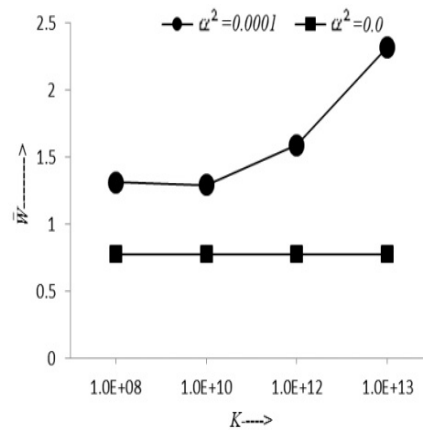


Figure 4: Values of \bar{W} for various values of K when $\dot{h} = 0.02(ms^{-1})$, $\varphi = 10^{-12}(m^2)$ and $U = 6.28(ms^{-1})$

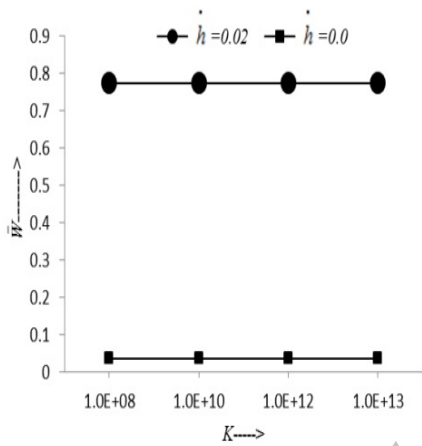


Figure 3: Values of \bar{W} for various values of K when $\alpha^2 = 0.0(m^3A^{-1}s^{-1})$, $\varphi = 10^{-12}(m^2)$ and $U = 6.28(ms^{-1})$

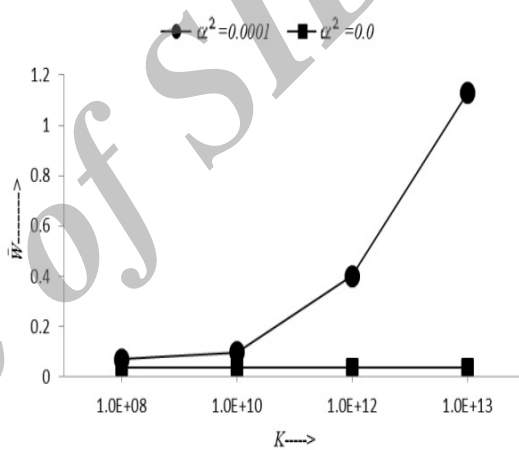


Figure 5: Values of \bar{W} for various values of K when $\dot{h} = 0.0(ms^{-1})$, $\varphi = 10^{-12}(m^2)$ and $U = 6.28(ms^{-1})$

strength (H is obtained from K as per above calculation).

From Figure 2, it is observed that, for $\alpha^2 \neq 0$, \bar{W} increases considerably in the presence of squeeze velocity. Also, as K increases (that is, as order of magnetic field strength increases), \bar{W} increases. From Figure 3, it is observed that, for $\alpha^2 = 0$, again \bar{W} increases considerably in the presence of squeeze velocity, but it does not affect much when the order of magnetic field strength increases.

Figure 4 and 5 shows the comparative study of Jenkin's model and Rosensweig's model when $\dot{h} \neq 0$ and $\dot{h} = 0$ respectively with respect to order of magnetic field strength. From Figure 4 it is observed that when $\dot{h} \neq 0$; that is, when squeeze velocity is present, \bar{W} increases consid-

erably in the case of $\alpha^2 \neq 0$. Also, \bar{W} has an increasing behavior with the increase of order of magnetic field strength. Whereas the behavior of \bar{W} is consistent with respect to increase of order of magnetic field strength for $\alpha^2 = 0$. The same behavior of \bar{W} can be observed from Figure 5 when $\dot{h} = 0$, that is, when there is no squeeze velocity.

Figure 6 and 7 shows the study of effect of squeeze velocity ($\dot{h} \neq 0$) when $\alpha^2 \neq 0$ (Jenkin's model) and $\alpha^2 = 0$ (Rosensweig's model) respectively with respect to permeability φ of the porous medium. From both the figures it is observed that, \bar{W} increases with the decrease of permeability φ . Also, when $\dot{h} \neq 0$, \bar{W} is increases more as compared to $\dot{h} = 0$.

Figure 8 and 9 shows the comparative study of

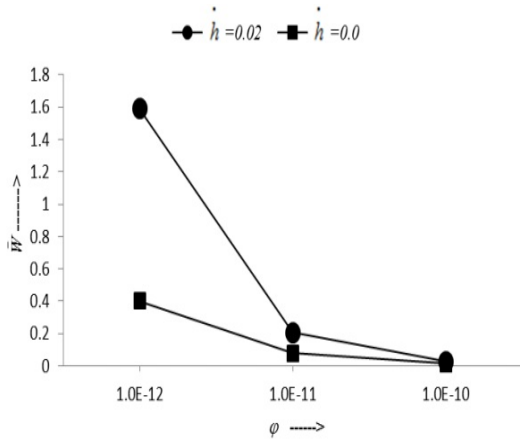


Figure 6: Values of \bar{W} for various values of φ when $\alpha^2 = 0.0001(m^3 A^{-1} s^{-1})$, $K = 10^{12}$ and $U = 6.28(ms^{-1})$

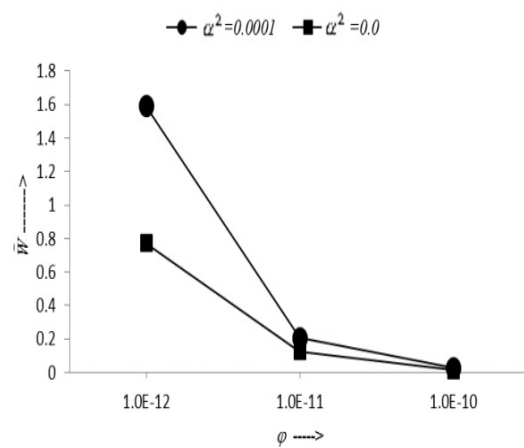


Figure 8: Values of \bar{W} for various values of φ when $\dot{h} = 0.02(ms^{-1})$, $K = 10^{12}$ and $U = 6.28(ms^{-1})$

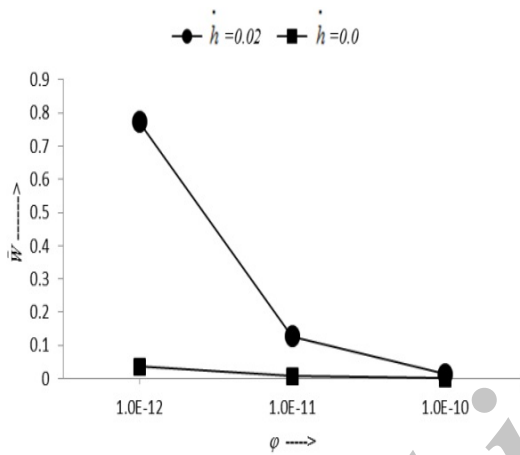


Figure 7: Values of \bar{W} for various values of φ when $\alpha^2 = 0.0(m^3 A^{-1} s^{-1})$, $K = 10^{12}$ and $U = 6.28(ms^{-1})$

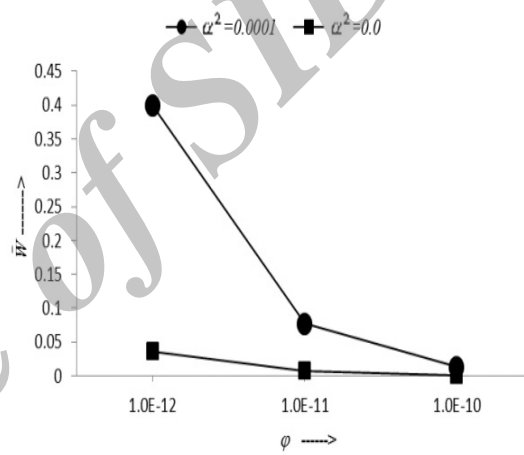


Figure 9: Values of \bar{W} for various values of φ when $\dot{h} = 0.0(ms^{-1})$, $K = 10^{12}$ and $U = 6.28(ms^{-1})$

Jenkin’s model and Rosensweig’s model when $\dot{h} \neq 0$ and $\dot{h} = 0$ respectively with respect to permeability φ . From both the figures it is observed that, \bar{W} increases with the decrease of permeability φ .

Figure 10 displays values of \bar{W} for various values of \dot{h} and U for $\alpha^2 \neq 0$, and from it the following observations can be made:

- (1) \bar{W} increases with the increase of \dot{h} .
- (2) \bar{W} increases with the decrease of U .

From Figures 2 to 9, it is observed that the values of \bar{W} increases substantially in the case of Jenkin’s model; that is, with the consideration of the ignored term of Ahmad *et. al.* [7] as $\rho\alpha^2\nabla \times (\frac{\mathbf{M}}{M} \times \mathbf{M}^*)$ with $\mathbf{M}^* = \frac{1}{2}(\nabla \times \mathbf{q}) \times \mathbf{M}$ and $\mathbf{M} = \bar{\mu}\mathbf{H}$

for $\dot{h} = 0$ and $\dot{h} \neq 0$ rather than Rosensweig’s case (Ahmad *et. al.* [7] for $\dot{h} = 0$).

4 Conclusions

The problem on ”Magnetic fluid lubrication of porous-pivoted slider bearing with slip velocity by [7]” is recapitulated here for its optimum performance with the inclusion of the ignored term $\rho\alpha^2\nabla \times (\frac{\mathbf{M}}{M} \times \mathbf{M}^*)$ with $\mathbf{M}^* = \frac{1}{2}(\nabla \times \mathbf{q}) \times \mathbf{M}$ and $\mathbf{M} = \bar{\mu}\mathbf{H}$. The ferrofluid used here is water based and magnetic field strength considered is of as shown in figures in order to get maximum magnetic field at $x = A/2$.

The design of the pivoted slider bearing can be made with the considerations of the following ob-

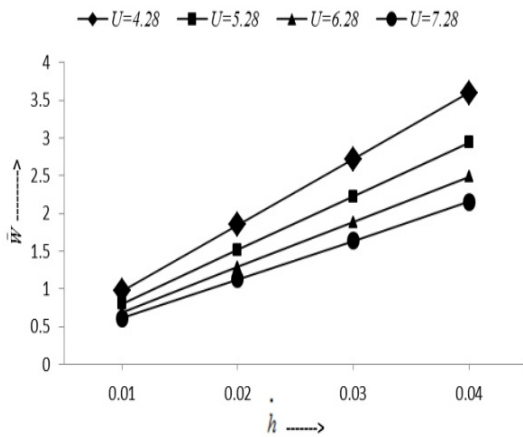


Figure 10: Values of \bar{W} for various values of h and U when $K = 10^{10}$, $\varphi = 10^{-12}(m^2)$ and $\alpha^2 = 0.0001(m^3 A^{-1} s^{-1})$.

servations:

Under an oblique magnetic field to the stator, the dimensionless load carrying capacity can be improved substantially by considering following features:

- (1) Ferrofluid flow behavior given by Jenkin's model
- (2) Presence of the squeeze velocity
- (3) Smaller values of permeability parameter φ
- (4) Increasing values of H^2 up to $O(10^5)$ as per [8]

It should be noted from equation (2.13) that a constant magnetic field does not enhance the bearing characteristics in Rosensweig's model of ferrofluid flow.

References

- [1] G. A. Maugin, *The principle of virtual power: Application to coupled field*, Acta Mechanica 35 (1980) 1-70.
- [2] G. S. Beavers, D. D. Joseph, *Boundary conditions at a naturally permeable wall*, Journal of Fluid Mechanics 30 (1967) 197-207.
- [3] J. Prakash, S. K. Vij, *Hydrodynamics lubrication of a porous slider*, Journal of Mechanical Engineering Science 15 (1973) 232-234.
- [4] J. T. Jenkins, *A Theory of magnetic fluids*, Archive for Rational Mechanics and Analysis 46 (1972) 42-60.
- [5] M. Goldowsky, *New methods for sealing, filtering, and lubricating with magnetic fluids*, IEEE transactions on Magnetics, Mag. 16 (1980) 382-386.
- [6] M. M. Khonsari, E. R. Booser, *Applied Tribology: Bearing design and Lubrication*, John Wiley and Sons, Inc., New York 2001, p. 131.
- [7] N. Ahmad, J. P. Singh, *Magnetic fluid lubrication of porous-pivoted slider bearing with slip velocity*, Journal of Engineering Tribology 221 (2007) 609-613.
- [8] N. Tipei, *Theory of lubrication with ferrofluids: Application to short bearings*, Transactions of ASME 104 (1982) 510-515.
- [9] P. Ram, P. D. S. Verma, *Ferrofluid lubrication in porous inclined slider bearing*, Indian Journal of Pure & Applied Mathematics 30(12) (1999) 1273-1281.
- [10] R. C. Shah, M. V. Bhat, *Anisotropic permeable porous facing and slip velocity on squeeze film in an axially undefined journal bearing with ferrofluid lubricant*, Journal of Magnetism and Magnetic Materials 279 (2004) 224-230.
- [11] R. C. Shah, M. V. Bhat, *Ferrofluid lubrication of a porous slider bearing with a convex pad surface considering slip velocity*, International Journal of Applied Electromagnetics and Mechanics 20 (2004) 1-9.
- [12] R. C. Shah, M. V. Bhat, *Ferrofluid lubrication in porous slider bearing with velocity slip*, International Journal of Mechanical Sciences 40 (2002) 2495-2502.
- [13] R. C. Shah, M. V. Bhat, *Squeeze film based on magnetic fluid in curved porous rotating circular plates*, Journal of Magnetism and Magnetic Materials 208 (2000) 115-119.
- [14] R. C. Shah, M. V. Bhat, *Magnetic fluid based porous inclined slider bearing with velocity slip*, International Journal of Applied Mechanics and Engineering 18(2) (2003) 331-336.
- [15] R. E. Rosensweig, *Ferrohydrodynamics*, Cambridge University Press, New York 1985.

- [16] V. K. Agrawal, *Magnetic fluid based porous inclined slider bearing*, Wear 107 (1986) 133-139.



R. C. Shah did M. Sc. (Applied Mathematics) in 1992, and B. Ed. in 1993 from The M. S. University of Baroda; M. Phil. in 1995 from S. P. University, Vallabh Vidyanagar; Ph. D. (Fluid Mechanics) from SVNIT, Surat and PGDIT in

2000 from Saurashtra University, Rajkot. He has nearly about 20 years of Teaching Experience at Various Engineering Colleges. Dr. Shah has a Research Experience of about 21 years and has published 53 research papers of which 34 are in International and 19 are in National journals in the field of Fluid Mechanics (Mathematical Modeling of Multi Phase Flow through porous media and Lubrication Theory). He is the author of six books.



Dilip B Patel did M. Sc. (Mathematics) degree in 2004 with University first rank (Gold medalist) from H. N. G. University, Patan, Gujarat, India; M. Phil. (Mathematics) degree in 2007 from M. K. University, Tamil

Nadu, India. Currently he is Ph D student (Research Scholar) at The M. S. University of Baroda, Vadodara, India. He is an Assistant Professor in Mathematics in Gujarat Technological University, Gujarat, India. His research interests include displacement problems through porous media and Lubrication, friction and wear of various types of Bearings using concepts of ferrofluid.