



A nonlinear model for common weights set identification in network Data Envelopment Analysis

J. Pourmahmoud ^{*†}, Z. Zeynali [‡]

Received Date: 2013-11-04 Revised Date: 2015-03-16 Accepted Date: 2015-12-03

Abstract

In the Data Envelopment Analysis (DEA) the efficiency of the units can be obtained by identifying the degree of the importance of the criteria (inputs-outputs). In DEA basic models, challenges are zero and unequal weights of the criteria when decision-making units are evaluated. One of the strategies applied to deal with these problems is using common weights of the each input/output in all decision making units (DMUs). In practice the DMUs are containing intermediate process. However, these units are considered as a black box in DEA basic models, disregarding internal process. This was the main reason network data envelopment analysis was introduced. On the other hand, similar challenges mentioned for DEA, zero and unequal weights of the criteria, exist for network structures as well. This paper suggests a common set of the weights for network structures to deal with the above problems using nonlinear models, for general case. Also some numerical examples using proposed models are presented.

Keywords : Network Data Envelopment Analysis (NDEA); Decision Making Units (DMU); Efficiency; Epsilon; Assurance Value.

1 Introduction

Data envelopment analysis (DEA), introduced by Charnes et al. [1], is an important tool for measuring the efficiency of decision making units (DMUs). This basic model evaluate a set of unites in which

similar inputs applied to produce similar outputs. This method allocates weights to both input and output indicators to maximize the relative efficiency of each evaluated unit. The determined weights for each indicator are calculated in the best form for all the DMUs, in which they may vary from unit to unit. Charnes et al. classified set of controls on weights as following:

- i) Direct analysis rejecting or assuming zero weight and eliminating some factors (ϵ).
- ii) Ignoring decision maker's ideas.

*Corresponding author e-mail addresses. pourmahmoud@azaruniv.ac.ir

[†]Department of Applied Mathematics, Azarbaijan Shahid madani University, Tabriz, Iran.

[‡]Department of Applied Mathematics, Azarbaijan Shahid madani University, Tabriz, Iran.

iii) Considering a relative importance of some factors by decision maker.

iv) Discarding the number of DMUs when the number of indicators is more than the number of DMUs under evaluation.

The common weights approach in DEA, initially introduced in 1990 by Cook et al.[3], and Roll et al.[4] in 1991, is known as one of the accurate approaches for evaluating all DMUs considering a unique weights for all the DMUs. Other researchers adopted some of the strategies for reaching common set of the weights. For instance, Roll et al.[4] obtained the common weights by narrowing the range of the weights and reducing domain using weighted average of the weights $\bar{U}_r = \frac{\sum_j E_j u_{rj}}{\sum_j E_j}$ and $\bar{V}_i = \frac{\sum_j E_j v_{ij}}{\sum_j E_j}$, in which E_j is the efficiency of DMU_j . In 1995, Doyle [5] considered the optimized average weights of all DMUs as the common weights. In 2013, Hosseinzadeh et al.[6] used multi-objective programming (MOP) method to attain the common weights. In 2005, Kao and Hung [7] proposed the best common weights for the two-stage network model using the calculated efficiency scores of DEA model and the shortest distance function.

Usually in the evaluating DMUs there are internal process with their own input and outputs. In some cases an internal output can be an input for another internal process or it can be the main output of the unit. In these system the output may get affected by the internal process and ignoring these internal process will result on inaccurate outcome. For the first time, in 1996, Fre and Grosskopf [8] called these units as networked structure units.

Network structures are generally classified into series, parallel, and general groups. The structures or units in which the internal processes are connected in series mode, known as a series network model. Kao and Hwangs, in 2008 [9], Fukuyama and Webers in 2010 [10], and Tone and

Tsutsuis in 2009 [11] have studied series network models. Parallel network models representing the behavior of parallel structures in which the internal processes are connected in a parallel mode. Models proposed by Tone and Tsutsui, in 2009 [11], and Lozano, in 2011 [13], are envelopment form of the parallel models and the model proposed by Kao in 2009 [12] is in multiplier form of the parallel models. Later Kao extended (2010) its model to general network having a combination of the series and the parallel models. In these studies the efficiency of the DMUs has been discussed. However, common set of the weights in network structure is not being studied considerably. Kao and Hungs in 2005 [7] and Yang and Liu in 2012 [14] have studied common set of the weights only for special cases.

This paper suggests a model for the general network structure so that each input/output and intermediate indicator has the same weight for evaluating efficiency of all involved processes. A new model is presented in order to obtain a common set of weights in such a way that all DMUs simultaneously are achieved the highest possible efficiency rating while the efficiency measures of divisions do not violates one.

The content of this study is organized as follows. Section 2 has a literature of the multiplier model with network structure and common set of weights model. In section 3, a new MOP method is suggested and the common set of weights in the network structure using goal programming is obtained and reported. Also a solution for a multiple optimal solutions problem is presented. Some numerical examples of obtaining the common set of weights in the general network structure are provided in the Section 4. Finally, section 5 analyzes obtained results and make a conclusion.

2 Review of the literature

In this section the common weight model based on Kaos multiple network model approach [12] and Hosseinzadeh et al. [6] is presented.

2.1 obtaining common weight using MOP

Hosseinzadeh et al.(2013), [6] evaluated efficiency of the DMUs by common weights and using MOP. MOP method is an optimization process for two or more possibly conflicting optimization processes and subjected to certain restrictions.

Suppose that J number of the DMUs consume m input DMU to produce s output. The following MOF problem gives the maximum simultaneous efficiency of the all DMUs:

$$\begin{aligned} \text{Max} \quad & \left\{ \frac{\sum_{r=1}^s u_r y_{rj}}{\sum_{i=1}^m v_i x_{ij}} \mid j = 1, 2, \dots, J \right\} \\ \text{s.t.} \quad & \frac{\sum_{r=1}^s u_r y_{rj}}{\sum_{i=1}^m v_i x_{ij}} \leq 1; \quad \forall j \\ & u_r \geq \varepsilon; \quad \forall r \\ & v_i \geq \varepsilon; \quad \forall i \end{aligned} \tag{2.1}$$

There are several approach for solving problem (2.1). Goal programming is one of the main methods of the MOP [15]. In goal programming approach, decision maker consider all ideal levels for objective functions. Hence, the sum of the deviations from ideal levels, as the objective function of goal programming problem will be minimized. Accordingly, if $A_j, j = 1, 2, \dots, J$, presents the goal of the jth objective function and φ_j^+, φ_j^- are negative deviation (under-achievement) and positive deviation (over-achievement) of the jth goal, respectively, Model (2.1) can be written as follows:

$$\begin{aligned} \text{min} \quad & \sum_{j=1}^J \varphi_j^- + \varphi_j^+ \\ \text{s.t.} \quad & \frac{\sum_{r=1}^s u_r y_{rj}}{\sum_{i=1}^m v_i x_{ij}} + \varphi_j^- - \varphi_j^+ = A_j; \quad \forall j \quad (a) \\ & \frac{\sum_{r=1}^s u_r y_{rj}}{\sum_{i=1}^m v_i x_{ij}} \leq 1; \quad \forall j \quad (b) \\ & u_r \geq \varepsilon; \quad \forall r \\ & v_i \geq \varepsilon; \quad \forall i \end{aligned} \tag{2.2}$$

On the other hand, according to constraint (2.2 b), the positive deviation (φ_j^+) lacks a positive value and as a result, $\varphi_j^+ = 0$. Thus, this Constraint (2.2b) is redundant and the constraint (2.2a), considering $A_j = 1$, can be written as follows:

$$\sum_{r=1}^s u_r y_{rj} + \varphi_j^- \sum_{i=1}^m v_i x_{ij} = \sum_{i=1}^m v_i x_{ij} \quad \forall j \tag{2.2-1}$$

Thus, the non-linear model (2.2-1) cannot be transformed into a linear form. Therefore, Hosseinzadeh et al., for linearization of Model (2.2) using the concept of goal programming and substituting $A_j = 1$ in Model (2.2), presented the following model to obtain the common set of weights:

$$\begin{aligned} \text{min} \quad & \sum_{j=1}^J \varphi_j \\ \text{s.t.} \quad & \sum_{r=1}^s u_r y_{rj} - \sum_{i=1}^m v_i y_{ij} + \varphi_j = 0 \quad \forall j \\ & u_r, v_i \geq \varepsilon, \quad \forall r, i \\ & \varphi_j \geq 0, \quad \forall j \end{aligned} \tag{2.2-2}$$

in which φ_j is the deviation from goal (unity value for the efficiency score).

Using this model, the common set of weights for a set of DMUs under evaluation is obtained and the units utilizing obtained common set of the weights are evaluated. However, when this model has multiple optimal solutions, ranking units may vary. This is considered a drawback for Hosseinzadeh et al. study and this paper suggests strategies to avoid this issue.

2.2 NDEA multiplier models

Many researchers suggested multiplier model for network structures and a few of them were introduced in the introduction section. Kao[12](2009)introduced a multiplier model of DEA for network structure for series, parallel and general states. He

provided a methodology to convert the system with an overall network structure to a series network structure while each structure has parallel structure (s).

Kazemi Matin and Azizi [16] in 2015 introduced the integrated NDEA model to measure the production systems performance and showed that the model presented by Kao (2009), is a special case of the presented model. Kao introduced a general network structure using an example in which each unit had the third divisions (Figure 1).

In Kao example, system main inputs and outputs are X_1 and X_2 and Y_1 , Y_2 and Y_3 , respectively. Division 1 may consumes only some of X_1 and X_2 values for producing Y_1 and a part of Y_1 may remains for division 3. Division 2 consumes a specific value of X_1 and X_2 producing Y_2 similar to division 1 and a part of Y_2 for division 3. Division 3 consumes the rest of X_1 and X_2 alongside with the parts produced Y_1 and Y_2 resulting from divisions 1 and 2 for producing Y_3 .

Assume that $X_{ij}^{(k)}$ indicates the i th input of division k ($k = 1, 2, 3$) from DMU_j . Particularly, sum of all inputs of three divisions ($X_{ij}^{(1)} + X_{ij}^{(2)} + X_{ij}^{(3)}$) for system input are X_{ij} ($j = 1, \dots, J, i = 1, 2$). It means that $(X_{ij}^{(1)} + X_{ij}^{(2)} + X_{ij}^{(3)}) = X_{ij}; i = 1, 2, j = 1, \dots, J$.

The output of division 1 is separated as $Y_1^{(I)}, Y_1^{(O)}$, where, $Y_1^{(O)}$ is the system final output and $Y_1^{(I)}$ is a value consumed by the division 3 as an input. Similarly, output of division 2 is $Y_2^{(I)}, Y_2^{(O)}$, where $Y_2^{(O)}$ is the system final output and $Y_2^{(I)}$ is a value consumed by division 3 as an input. Accordingly,

$$Y_{rj}^{(I)} + Y_{rj}^{(O)} = Y_{rj}; \quad r = 1, 2; \quad j = 1, \dots, J.$$

Multiplier model of general network

structure of figure 1 is as follows:

$$\begin{aligned} E_o : & \text{ for } o = 1, \dots, J \\ \text{Max} & \quad u_1 y_{1o}^{(o)} + u_2 y_{2o}^{(o)} + u_3 y_{3o} \\ \text{s.t.} & \quad v_1 x_{1o} + v_2 x_{2o} = 1 \\ & \quad (u_1 y_{1j}^{(o)} + u_2 y_{2j}^{(o)} + u_3 y_{3j}) \\ & \quad - (v_1 x_{1j} + v_2 x_{2j}) \leq 0 \quad \forall j \\ & \quad u_1 y_{1j} - (v_1 x_{1j}^{(1)} + v_2 x_{2j}^{(1)}) \leq 0 \quad \forall j \\ & \quad u_2 y_{2j} - (v_1 x_{1j}^{(2)} + v_2 x_{2j}^{(2)}) \leq 0 \quad \forall j \\ & \quad u_1 y_{3j} - (v_1 x_{1j}^{(3)} + v_2 x_{2j}^{(3)} \\ & \quad + u_1 y_{1j}^{(I)} + u_2 y_{2j}^{(I)}) \leq 0 \quad \forall j \\ & \quad u_1, u_2, u_3, v_1, v_2, \geq \varepsilon \end{aligned} \tag{2.3}$$

Where, u_r indicates the allocated weight to r th output ($r = 1, 2, 3$) and v_i is the allocated weight to the i th input ($i = 1, 2$) used for measuring system efficiency DMU_o of the each process. As observed in model 2.3, X_1 input weight is always v_1 no matter to be used by division 1 for $x_{1j}^{(1)}$ input, division 2 as $x_{1j}^{(2)}$ or division 3 as $x_{1j}^{(3)}$; or that y_1 output weight is always u_1 no matter to be used by division 3 as input or to be the final output of the system. Other indices complies in a similar condition.

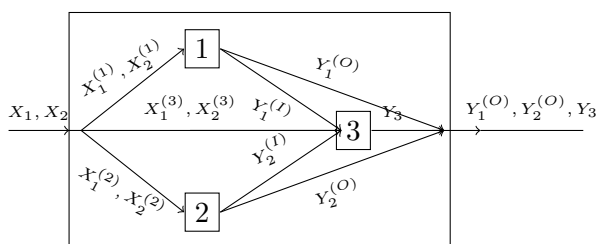


Figure 1: A network system with three division.

Kao also showed that every general network structure could be converted into a two-stage network structure through introducing dummy divisions, where each stage has a parallel structure. If dummy divisions 4 and 5 are added in Figure 1 as an example, Figure 2 with two-stage parallel structure will be created.

The process for calculating the efficiency score of the divisions in Figure 1 is as fol-

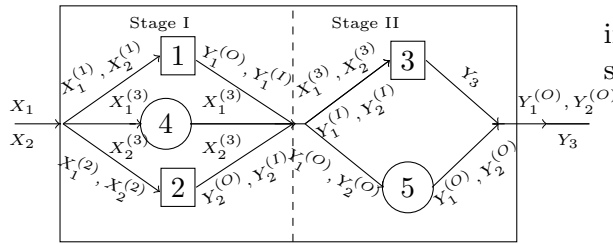


Figure 2: An equivalent tandem system where each stage has a parallel structure.

lowing.

$$\begin{aligned}
 E_o^{(1)} &= \frac{u_1^* y_{1o}}{v_1^* x_{1o} + v_2^* x_{2o}} \\
 E_o^{(2)} &= \frac{u_2^* y_{2o}}{v_1^* x_{1o} + v_2^* x_{2o}} \\
 E_o^{(3)} &= \frac{u_3^* y_{3o}}{v_1^* x_{1o} + v_2^* x_{2o} + u_1^* y_{1o} + u_2^* y_{2o}}
 \end{aligned} \tag{2.4}$$

The efficiency score of the two stages shown in Figure 2, can be obtained using following relation.

$$\begin{aligned}
 E_o^I &= \frac{u_1^* y_{1o} + (v_1^* x_{1o}^{(3)} + v_2^* x_{2o}^{(3)}) + u_2^* y_{2o}}{v_1^* x_{1o} + v_2^* x_{2o}} \\
 E_o^{II} &= \frac{u_1^* y_{1o}^{(o)} + u_2^* y_{2o}^{(o)} + u_3^* y_{3o}}{u_1^* y_{1o} + (v_1^* x_{1o}^{(3)} + v_2^* x_{2o}^{(3)}) + u_2^* y_{2o}}
 \end{aligned} \tag{2.5}$$

So that according to 2.5, the overall efficiency is equal to the product efficiency of the two stages, in other words: $E_o = E_o^I \times E_o^{II}$

3 Common weights in network structures

3.1 Common weights considering units efficiency deviation

Suppose J is the number of the network structures and each structure consist of K divisions (K=3 for the Kao example). Each division can receive input(s) from the outside or from other division(s), consuming them in production process to generate the main output of the system. The generated output also can be received by the another division of the system.

For Kao's network structure a model is introduced to obtain the common weights set.

$$\begin{aligned}
 \min & \sum_{j=1}^J \varphi_j \\
 \text{s.t.} & (u_1 y_{1j}^{(o)} + u_2 y_{2j}^{(o)} + u_3 y_{3j}) \\
 & - (v_1 x_{1j} + v_2 x_{2j}) + \varphi_j = 0 \quad ; \forall j \\
 & u_1 y_{1j} - (v_1 x_{1j}^{(1)} + v_2 x_{2j}^{(1)}) \leq 0 \quad ; \forall j \\
 & u_2 y_{2j} - (v_1 x_{1j}^{(2)} + v_2 x_{2j}^{(2)}) \leq 0 \quad ; \forall j \\
 & u_3 y_{3j} - (v_1 x_{1j}^{(3)} + v_2 x_{2j}^{(3)} \\
 & + u_1 y_{1j}^{(I)} + u_2 y_{2j}^{(I)}) \leq 0 \quad ; \forall j \\
 & u_1, u_2, u_3, v_1, v_2 \geq \varepsilon \quad \forall j \\
 & \varphi_j \geq 0 \quad \forall j
 \end{aligned} \tag{3.6}$$

Where φ_j is the efficiency deviation of DMU_j and u_1, u_2, u_3, v_1, v_2 are the common weight indicators. In this model the goal is to minimize the sum of φ_j , subject to maximizing the efficiency scores of the network structure and divisions.

If (v_r^*, u_i^*) is the optimal solution, the efficiency score for DMU_j is calculated as follows:

$$E_j^* = \frac{\sum_{r=1}^s u_r^* y_{rj}}{\sum_{i=1}^m u_i^* x_{ij}} \tag{3.7}$$

The units can be ranked using obtained efficiency scores from equation (3.7).

When a problem has multiple optimal solutions, the objection of "the ranking is not stable" is appeared. Thus, in order to resolve the objection, the problem is converted into a two-phase problem, in which the first phase is solving the Model (3.6), and the second is solving following model:

$$\begin{aligned}
 \text{Max min} & \left\{ \frac{(u_1 y_{1j}^{(o)} + u_2 y_{2j}^{(o)} + u_3 y_{3j})}{(v_1 x_{1j} + v_2 x_{2j})} \mid \forall j \right\} \\
 \text{s.t.} & (u_1 y_{1j}^{(o)} + u_2 y_{2j}^{(o)} + u_3 y_{3j}) \\
 & - (v_1 x_{1j} + v_2 x_{2j}) + \varphi_j^* = 0 \quad \forall j \\
 & u_1 y_{1j} - (v_1 x_{1j}^{(1)} + v_2 x_{2j}^{(1)}) \leq 0 \quad \forall j \\
 & u_2 y_{2j} - (v_1 x_{1j}^{(2)} + v_2 x_{2j}^{(2)}) \leq 0 \quad \forall j \\
 & u_3 y_{3j} - (v_1 x_{1j}^{(3)} + v_2 x_{2j}^{(3)} \\
 & + u_1 y_{1j}^{(I)} + u_2 y_{2j}^{(I)}) \leq 0 \quad \forall j \\
 & u_1, u_2, u_3, v_1, v_2 \geq \varepsilon
 \end{aligned} \tag{3.8}$$

Variable

$$\lambda = \min \left\{ \frac{u_1 y_{1j}^{(O)} + u_2 y_{2j}^{(O)} + u_3 y_{3j}}{v_1 x_{1j} + v_2 x_{2j}} \mid \forall j \right\}$$

is defined to change the multi-objective model (3.8) into the nonlinear model as follows:

$$\begin{aligned} \text{Max } & \lambda \\ \text{s.t. } & \frac{u_1 y_{1j}^{(O)} + u_2 y_{2j}^{(O)} + u_3 y_{3j}}{v_1 x_{1j} + v_2 x_{2j}} \geq \lambda \\ & (u_1 y_{1j}^{(O)} + u_2 y_{2j}^{(O)} + u_3 y_{3j}) \\ & - (v_1 x_{1j} + v_2 x_{2j}) + \varphi_j^* = 0 \quad \forall j \\ & u_1 y_{1j} - (v_1 x_{1j}^{(1)} + v_2 x_{2j}^{(1)}) \leq 0 \quad \forall j \\ & u_2 y_{2j} - (v_1 x_{1j}^{(2)} + v_2 x_{2j}^{(2)}) \leq 0 \quad \forall j \\ & u_3 y_{3j} - (v_1 x_{1j}^{(3)} + v_2 x_{2j}^{(3)}) \\ & + u_1 y_{1j}^{(I)} + u_2 y_{2j}^{(I)} \leq 0 \quad \forall j \\ & u_1, u_2, u_3, v_1, v_2, \lambda \geq \varepsilon \end{aligned} \tag{3.9}$$

By solving the nonlinear model (3.9) and obtaining the weights, (v_r^*, u_i^*) , the efficiency score of DMU_j is calculated as (3.7).

In Model (5),

$$(v_1, v_2, u_1, u_2, u_3, \varphi) = (0, 0, 0, 0, 0, 0)$$

satisfies in the first four constrains, and considering the fifth constrains and the objective function in the optimum solution the weights reaches into near zero.

Because of the computer limited memory, answers are strongly depend on the value of epsilon; and sometimes irrational results on obtaining error propagation. Therefore, to resolve with this problem, the epsilon has to be obtained from [17] and the optimum

value is used in Models (3.6) to (3.12).

$$\begin{aligned} \text{Max } & \varepsilon \\ \text{s.t. } & v_1 x_{1j} + v_2 x_{2j} \leq 1 \quad \forall j \\ & (u_1 y_{1j}^{(O)} + u_2 y_{2j}^{(O)} + u_3 y_{3j}) \\ & - (v_1 x_{1j} + v_2 x_{2j}) \leq 0 \quad \forall j \\ & u_1 y_{1j} - (v_1 x_{1j}^{(1)} + v_2 x_{2j}^{(1)}) \leq 0 \quad \forall j \\ & u_2 y_{2j} - (v_1 x_{1j}^{(2)} + v_2 x_{2j}^{(2)}) \leq 0 \quad \forall j \\ & u_3 y_{3j} - (v_1 x_{1j}^{(3)} + v_2 x_{2j}^{(3)}) \\ & + u_1 y_{1j}^{(I)} + u_2 y_{2j}^{(I)} \leq 0 \quad \forall j \\ & u_1 - \varepsilon \geq 0 \\ & u_2 - \varepsilon \geq 0 \\ & u_3 - \varepsilon \geq 0 \\ & v_1 - \varepsilon \geq 0 \\ & v_2 - \varepsilon \geq 0 \end{aligned} \tag{3.10}$$

For example, if the optimum value for the Model (3.10) is ε^* , the Model (3.6) constraint Type 5 is as follows:

$$u_1, u_2, u_3, v_1, v_2 \geq \varepsilon^*, \varphi_j \geq 0 \quad \forall j$$

Using ε^* in other models is alike.

Model (3.10) is used for finding ε^* . ε^* is used for finding, divisions, stage, and overall efficiency of the system. It should be noted that the obtained values for the efficiency using ε^* may vary slightly with the values obtained using Kao's model.

3.2 Common weights of network structures with efficiency deviation of the units and divisions

The model presented in the previous section is obtained based on the the efficiency deviation of the entire system. In this section this model is expanded using the efficiency deviation of both the divisions, and the entire system; and maintaining the maximum efficiency of the system, and the intermediate divisions. Considering these

conditions the model is as follows:

$$\begin{aligned}
 \min \quad & \sum_{j=1}^J (\varphi_j + \sum_{k=1}^3 \varphi_{kj}) \\
 \text{s.t.} \quad & (u_1 y_{1j}^{(o)} + u_2 y_{2j}^{(o)} + u_3 y_{3j}) \\
 & - (v_1 x_{1j} + v_2 x_{2j}) + \varphi_j = 0 \\
 & u_1 y_{1j} - (v_1 x_{1j}^{(1)} + v_2 x_{2j}^{(1)}) + \varphi_{1j} = 0 \\
 & u_2 y_{2j} - (v_1 x_{1j}^{(2)} + v_2 x_{2j}^{(2)}) + \varphi_{2j} = 0 \\
 & u_3 y_{3j} - (v_1 x_{1j}^{(3)} + v_2 x_{2j}^{(3)}) \\
 & + u_1 y_{1j}^{(I)} + u_2 y_{2j}^{(I)} + \varphi_{3j} = 0 \\
 & j = 1, 2, \dots, J \\
 & \varphi_j, \varphi_{kj} \geq 0; \quad \forall k, j \\
 & u_1, u_2, u_3, v_1, v_2 \geq \varepsilon^*
 \end{aligned} \tag{3.11}$$

By solving this model, the common weights set of the system units under evaluation is achieved using the maximum efficiency of units and divisions.

Suppose $(v_r^*, u_i^*, \varphi_j^*, \varphi_{kj}^*)$ is the optimal solution of model (3.11), the efficiency score of DMU_j is obtained using the relationship as (3.7). Hence, the DMUs can be ranked based on the obtained efficiency scores.

However, when the problem has multiple optimal solutions, the ranking of the DMUs will be unstable. To resolve this objection, a two-phase model has to be solved. The first phase of model is (3.11) and the second phase of the model is as follows:

$$\begin{aligned}
 \text{Max min} \quad & \left\{ \frac{u_1 y_{1j}^{(o)} + u_2 y_{2j}^{(o)} + u_3 y_{3j}}{v_1 x_{1j} + v_2 x_{2j}} \mid \forall j \right\} \\
 \text{s.t.} \quad & (u_1 y_{1j}^{(o)} + u_2 y_{2j}^{(o)} + u_3 y_{3j}) \\
 & - (v_1 x_{1j} + v_2 x_{2j}) + \varphi_j^* = 0 \\
 & u_1 y_{1j} - (v_1 x_{1j}^{(1)} + v_2 x_{2j}^{(1)}) + \varphi_{1j}^* = 0 \\
 & u_2 y_{2j} - (v_1 x_{1j}^{(2)} + v_2 x_{2j}^{(2)}) + \varphi_{2j}^* = 0 \\
 & u_3 y_{3j} - (v_1 x_{1j}^{(3)} + v_2 x_{2j}^{(3)}) \\
 & + u_1 y_{1j}^{(I)} + u_2 y_{2j}^{(I)} + \varphi_{3j}^* = 0 \\
 & j = 1, 2, \dots, J \\
 & u_1, u_2, u_3, v_1, v_2 \geq \varepsilon^*
 \end{aligned} \tag{3.12}$$

The multi-objective model (3.12) is transferred to the model (3.13) by introducing the below variable

$$\lambda = \min \left\{ \frac{u_1 y_{1j}^{(o)} + u_2 y_{2j}^{(o)} + u_3 y_{3j}}{v_1 x_{1j} + v_2 x_{2j}} \mid \forall j \right\}$$

$$\begin{aligned}
 \text{Max} \quad & \lambda \\
 \text{s.t.} \quad & \frac{u_1 y_{1j}^{(o)} + u_2 y_{2j}^{(o)} + u_3 y_{3j}}{v_1 x_{1j} + v_2 x_{2j}} \geq \lambda \\
 & (u_1 y_{1j}^{(o)} + u_2 y_{2j}^{(o)} + u_3 y_{3j}) \\
 & - (v_1 x_{1j} + v_2 x_{2j}) + \varphi_j^* = 0 \quad \forall j \\
 & u_1 y_{1j} - (v_1 x_{1j}^{(1)} + v_2 x_{2j}^{(1)}) \varphi_{1j}^* = 0 \quad \forall j \\
 & u_2 y_{2j} - (v_1 x_{1j}^{(2)} + v_2 x_{2j}^{(2)}) \varphi_{2j}^* = 0 \quad \forall j \\
 & u_3 y_{3j} - (v_1 x_{1j}^{(3)} + v_2 x_{2j}^{(3)}) \\
 & + u_1 y_{1j}^{(I)} + u_2 y_{2j}^{(I)} \varphi_{3j}^* = 0 \quad \forall j \\
 & u_1, u_2, u_3, v_1, v_2, \lambda \geq \varepsilon^*
 \end{aligned} \tag{3.13}$$

The efficiency scores is obtained by substituting the presented model results in equation (3.7). Using obtained scores DMUs are ranked, and the challenge of zero weights is eliminated.

4 Numerical example

To demonstrate performance of the proposed models, the models are investigated considering two examples of Kao in [9] and [12]. The first is a simple example including five decision-making units A, B, C, D, E, with three intermediate divisions as its structure is shown in the Figure 1. The second example is a case study introduced by Kao about Twenty four Non-life insurance companies in Taiwan. He considered these companies as decision making units (system), each consisting two intermediate divisions.

Example 4.1. Consider five decision-making units A, B, C, D, E, each consisting three Divisions. The structure of each decision-making unit is shown in Figure 1. The inputs/outputs of all the systems are listed in Table 1.

According to the data shown in Table 1, implementing Toloo's model, the overall assurance value will be equal to $\varepsilon^{**} = 0.0344828$.

Table 1: Input/output data of Kao example in the Year 2009.

DMU	P	X ₁	X ₂	y ₁ ^(o)	y ₁ ^(T)	y ₂ ^(o)	y ₂ ^(T)	y ₃
A		11	14	2	-	2	-	1
	1	3	5	2	2	-	-	-
	2	4	3	-	-	2	1	-
B	3	4	6	-	2	-	1	1
		7	7	1	-	1	-	1
	1	2	3	1	1	-	-	-
C	2	2	1	-	-	1	1	-
	3	3	3	-	1	-	1	1
		11	14	1	-	1	-	2
D	1	3	4	1	1	-	-	-
	2	5	3	-	-	1	1	-
	3	3	7	-	1	-	1	2
E		14	14	2	-	3	-	1
	1	4	6	2	1	-	-	-
	2	5	5	-	-	3	1	-
E	3	5	3	-	1	-	1	1
		14	15	3	-	2	-	3
	1	5	6	3	1	-	-	-
E	2	5	4	-	-	2	2	-
	3	4	5	-	1	-	2	3

Thus, the overall assurance interval is (0,0.0344828]. Table 2 shows the values for the traditional CCR model, and Kao model (3.9) in two modes, without value and with overall assurance value, and CSW model.

Table 2: Comparing 5 DMU system performances independently calculated through ordinary model CCR, Kao model and the model presented here.

DMU	E-CCR	E-CCR ϵ	EN-CCR	EN ϵ	EN-CSW
A	1.0000	0.9266	0.5227	0.4744	0.4667
B	0.8980	0.8832	0.5952	0.5895	0.5833
C	0.8485	0.7377	0.5682	0.5209	0.5133
D	1.0000	1.0000	0.4821	0.4706	0.4702
E	1.0000	1.0000	0.8000	0.7931	0.7931

As it is shown in the table 2, applying a common set of the weights, DMU_A and DMU_D rankings are replaced comparing with the rank obtained from Kao network structure efficiency scores. And this replacement is due to applying the common weights for evaluating the units. Furthermore, considering calculation of epsilon using Toloo model, values are obtained for CCR efficiencies and network model are slightly different from Kao solution [?]. For instance, in Kao CCR model, DMU_A efficiency value is 1 regarded as an efficient unit. But, with using the epsilon obtained equal to 0.9266, it is considered as an inefficient unit.

As Table 2 shows, using ϵ assurance value in CCR model, Unit A is converted from efficient state to inefficient state, and the efficiency scores of units C, and B are dropped. In addition, using the assurance value ϵ in NDEA-CCR model, the efficiency scores of all the units are reduced; though, ranking of the units are still constant.

The Weights obtained from Kao's model and CSW proposed model are given in Table 3.

Table 3: The weights of the five DMUs calculated independently via Kao model, and CSW proposed model

DMU	v ₁	v ₂	w ₁	w ₂	u ₃
A	0.0470	0.0345	0.0784	0.0643	0.1891
B	0.0345	0.1085	0.1613	0.0888	0.3395
C	0.0470	0.0345	0.0784	0.0643	0.1891
D	0.0369	0.0345	0.0708	0.0542	0.1665
E	0.0345	0.0345	0.0690	0.0517	0.1609
CSW	0.0345	0.0345	0.0690	0.0517	0.1609

In the above table, Rows 2 to 6 are the weights obtained from Kao network structure model and the last row is the common set of the weights obtained using set of common weight model. The efficiency of stages and divisions of 5 evaluation units considering Kao models and common weight set are presented in the following table.

Table 4: Efficiency scores processes and stages calculated from the Kao network model

DMU	P.eff.Kao			S.eff.Kao	
	E ₁	E ₂	E ₃	E _{S1}	E _{S2}
A	1.0000	0.6613	0.3070	0.9013	0.5264
B	0.8188	1.0000	0.5003	0.9286	0.6348
C	0.5618	0.3796	0.7204	0.6677	0.7801
D	0.5990	0.6069	0.4029	0.7174	0.6561
E	0.7273	0.6667	1.0000	0.7931	1.0000

Now, the models applied for the data of 23 insurance companies in Taiwan. The data are related to Kao 2008 [9].

Table 5: Efficiency scores processes and stages calculated from the CSW proposed model

DMU	P.eff.CSW			S.eff.CSW	
	E_1	E_2	E_3	E_{S1}	E_{S2}
A	1.0000	0.6429	0.3011	0.9000	0.5185
B	0.8000	1.0000	0.4912	0.9286	0.6282
C	0.5714	0.3750	0.6914	0.6800	0.7549
D	0.6000	0.6000	0.4058	0.7143	0.6583
E	0.7273	0.6667	1.0000	0.7931	1.0000

Example 4.2. Consider the example of 24 Taiwanese insurance companies extracted from Kao and Hwang paper 2.4 in which the structure of each is similar to Figure 3. Inputs/outputs of the insurance companies are listed in Table 3.




Figure 3: Network structure of the insurance operation system.

Table 6: Input/output table of Kao, case study: Taiwanese insurance companies in 2008.

DMU	X_1	X_2	Z_1	Z_2	Y_1	Y_2
DMU ₁	1178744	673512	7451757	856735	984143	681687
DMU ₂	1381822	1352755	10020274	1812894	1228502	834754
DMU ₃	1177994	592790	4776548	560244	293613	658428
DMU ₄	601320	594259	3174851	371863	248709	177331
DMU ₅	6699063	3531614	37392862	1753794	7851229	3925272
DMU ₆	2627707	668363	9747908	952326	1713598	415058
DMU ₇	1942833	1443100	10689457	643412	2239593	439039
DMU ₈	3789001	1873530	17267266	134600	3899530	622868
DMU ₉	1567746	950432	11473162	546337	1043778	264098
DMU ₁₀	1303249	1298470	8210389	504528	1697941	554806
DMU ₁₁	1962448	672414	7222378	643178	1486014	18259
DMU ₁₂	2592790	650952	9434406	1118489	1574191	909295
DMU ₁₃	2609941	1368802	13921464	811343	3609236	223047
DMU ₁₄	1396002	988888	7396396	465509	1401200	332283
DMU ₁₅	2184944	651063	10422297	749893	3355197	555482
DMU ₁₆	1211716	415071	5606013	402881	854054	197947
DMU ₁₇	1453797	1085019	7695461	342489	3144484	371984
DMU ₁₈	757515	547997	3631484	995620	692731	163927
DMU ₁₉	159422	182338	1141950	483291	519121	46857
DMU ₂₀	145442	53518	316829	131920	355624	26537
DMU ₂₁	84171	26224	225888	40542	51950	6491
DMU ₂₂	15993	10502	52063	14574	82141	4181
DMU ₂₃	54693	28408	245910	49864	0.1	18980
DMU ₂₄	163297	235094	476419	644816	142370	16976

Implementing Toloo model using the data in Table 3 results on the overall assurance interval $\epsilon^{**} = 1.04573e - 8$. Thus, the overall assurance interval is $(0, 1.04573e - 8]$.

Kao implementation results are listed in Tables 4 and 5 in the following two states:

1. Without any value;
2. With overall assurance value

In this table, the second, third, fourth and sixth columns are the results of implementing traditional $CCR - \epsilon$ models without overall assurance value, traditional $CCR - \epsilon$ with overall assurance value, network without an overall assurance value, and network with the overall assurance value obtained from model NDEA-PZ, respectively. The fifth and seventh columns are units rankings in network models without overall assurance value and with overall assurance value respectively.

Table 7: Comparing the efficiencies of 24 insurance companies in Taiwan independently calculated through ordinary CCR model and Kao model.

DMU	E-CCR	E-CCR- ϵ	EN-Kao	R-Kao
DMU ₁	0.984	0.978	0.996	4
DMU ₂	1.000	1.000	1.000	1.5
DMU ₃	0.988	0.970	0.936	5
DMU ₄	0.488	0.488	0.488	11
DMU ₅	1.000	1.000	0.979	3
DMU ₆	0.594	0.588	0.390	15
DMU ₇	0.470	0.467	0.374	17
DMU ₈	0.415	0.415	0.295	20
DMU ₉	0.327	0.327	0.280	22
DMU ₁₀	0.781	0.772	0.705	9
DMU ₁₁	0.283	0.277	0.283	21
DMU ₁₂	1.000	1.000	0.714	8
DMU ₁₃	0.353	0.351	0.337	18
DMU ₁₄	0.470	0.468	0.394	14
DMU ₁₅	0.979	0.972	0.737	7
DMU ₁₆	0.472	0.472	0.321	19
DMU ₁₇	0.635	0.633	0.427	13
DMU ₁₈	0.427	0.426	0.385	16
DMU ₁₉	0.822	0.821	0.487	12
DMU ₂₀	0.935	0.934	0.850	6
DMU ₂₁	0.333	0.333	0.268	23
DMU ₂₂	1.000	1.000	1.000	1.5
DMU ₂₃	0.599	0.598	0.580	10
DMU ₂₄	0.257	0.256	0.172	24

According to results of the tables 7 and 8, it is observed that DMU_2, DMU_5, DMU_{12} and DMU_{22} have the efficiency equal to one in CCR basic model. however in Kao network model, just DMU_{22} has the efficiency equal to one.

In addition, in CSW model, there is no unit with efficiency value equal to one. The rank of DMU_{15} in Model CSW was promoted significantly compared to the Kao two network models and CCR. DMU_{24} in

Table 8: Comparing the efficiencies of 24 insurance companies in Taiwan independently calculated through the model presented here.

DMU	EN- ϵ	EN-CSW- ϵ	R-EN-CSW- ϵ
DMU ₁	0.913	0.477	5
DMU ₂	0.805	0.301	9
DMU ₃	0.894	0.473	6
DMU ₄	0.450	0.145	22
DMU ₅	0.599	0.546	2
DMU ₆	0.403	0.332	8
DMU ₇	0.325	0.193	17
DMU ₈	0.293	0.221	15
DMU ₉	0.262	0.161	21
DMU ₁₀	0.582	0.237	13
DMU ₁₁	0.266	0.098	23
DMU ₁₂	0.711	0.618	1
DMU ₁₃	0.320	0.175	19
DMU ₁₄	0.362	0.200	16
DMU ₁₅	0.729	0.530	3
DMU ₁₆	0.320	0.269	11
DMU ₁₇	0.420	0.266	12
DMU ₁₈	0.345	0.178	18
DMU ₁₉	0.480	0.232	14
DMU ₂₀	0.848	0.461	7
DMU ₂₁	0.268	0.174	20
DMU ₂₂	1.000	0.493	4
DMU ₂₃	0.579	0.273	10
DMU ₂₄	0.167	0.057	24

Table 10: Efficiency scores processes and stages of the 24DMUs calculated from the Kaos network model .

DMU	Process Eff. Of Kao		Stage Eff. Of Kao	
	I	2	I	II
DMU ₁	0.618	0.971	0.940	0.972
DMU ₂	0.433	0.981	0.821	0.981
DMU ₃	0.426	0.971	0.921	0.971
DMU ₄	0.306	0.501	0.896	0.503
DMU ₅	0.596	0.883	0.667	0.898
DMU ₆	0.736	0.322	0.743	0.543
DMU ₇	0.421	0.386	0.805	0.404
DMU ₈	0.479	0.275	0.500	0.586
DMU ₉	0.616	0.278	0.915	0.287
DMU ₁₀	0.359	0.716	0.806	0.722
DMU ₁₁	0.354	0.018	0.367	0.725
DMU ₁₂	1.000	0.694	1.000	0.711
DMU ₁₃	0.464	0.127	0.479	0.669
DMU ₁₄	0.420	0.408	0.866	0.418
DMU ₁₅	1.000	0.394	1.000	0.729
DMU ₁₆	0.621	0.287	0.626	0.512
DMU ₁₇	0.503	0.440	0.786	0.535
DMU ₁₈	0.481	0.366	0.931	0.371
DMU ₁₉	0.538	0.485	0.966	0.497
DMU ₂₀	0.851	0.442	0.851	0.996
DMU ₂₁	0.451	0.208	0.451	0.593
DMU ₂₂	1.000	0.501	1.000	1.000
DMU ₂₃	0.800	0.585	0.991	0.585
DMU ₂₄	0.241	0.173	0.958	0.174

basic CCR, network Models, and CSW presented Model have the lowest efficiency and ranking.

The common weights obtained by solving CSW Model are as follows:

Table 9: The weights of the 24 DMUs calculated via CSW proposed model.

v_1	v_2	w_1	w_2	u_1	u_2
2.3334e-7	1.046e-8	1.046e-8	1.046e-8	1.046e-8	1.0346e-7

The efficiency of divisions and stages of Example 24 in life insurance Company in Taiwan are investigated in Tables 10 and 11:

Table 11: Efficiency scores processes and stages of the 24DMUs calculated from the CSW presented model here.

DMU	Process Eff. Of CSW		Stage Eff. Of CSW	
	I	2	I	II
DMU ₁	0.618	0.711	0.646	0.738
DMU ₂	0.433	0.625	0.458	0.657
DMU ₃	0.426	1.000	0.473	1.000
DMU ₄	0.286	0.423	0.317	0.456
DMU ₅	0.596	0.847	0.628	0.869
DMU ₆	0.832	0.308	0.858	0.387
DMU ₇	0.421	0.327	0.454	0.424
DMU ₈	0.533	0.278	0.572	0.386
DMU ₉	0.616	0.192	0.642	0.250
DMU ₁₀	0.359	0.548	0.387	0.613
DMU ₁₁	0.623	0.018	0.667	0.147
DMU ₁₂	0.835	0.684	0.860	0.718
DMU ₁₃	0.601	0.127	0.632	0.278
DMU ₁₄	0.420	0.355	0.454	0.440
DMU ₁₅	1.000	0.411	1.000	0.530
DMU ₁₆	0.741	0.271	0.771	0.348
DMU ₁₇	0.462	0.388	0.492	0.540
DMU ₁₈	0.435	0.301	0.468	0.381
DMU ₁₉	0.527	0.260	0.545	0.427
DMU ₂₀	0.674	0.442	0.709	0.651
DMU ₂₁	0.544	0.183	0.601	0.289
DMU ₂₂	0.635	0.501	0.658	0.750
DMU ₂₃	0.467	0.536	0.509	0.536
DMU ₂₄	0.241	0.131	0.264	0.217

According to 2.4, the total efficiency is equal to multiplication of efficiencies of the two stages.

$$E_O = E_O^I \times E_O^{II}$$

However, the above relationship is not true for Kaos results. For example, in Table 6, Kao [12] relationship is not applied for DMU₆. Because the total efficiency is equal to 0.390, while, the product of efficiency of stages is $0.736 \times 0.324 = 0.238$.

This is considered as an objection to Kaos results.

5 Conclusion

it is observed that there is no need for DMU to have the full efficiency in network structure. Most methods are applied only for obtaining the efficient units which cannot be used for ranking. Hence, the

suggested model of the common weights can be used for ranking of the units with network structure. The obtained efficiency scores in the common weight model is reduced compared to Kao model; and DMUs ranking may be changed. Further research, ranking of the units under evaluation with network structures when the efficiency scores are equal, is suggested.

References

- [1] A. Charnes, W. W. Cooper, E. Rhodes, *Measuring the efficiency of DMUs*, European Journal of Operational Research 2 (1978) 429-444.
- [2] A. Charnes, W. W. Cooper, A. Y. Lewin, L. M. Seiford, *Data Envelopment Analysis: Theory, Methodology and Applications*, Kluwer Academic Publishers: Norwell (1994).
- [3] W. Cook, Y. Roll, A. Kazakov, *A DEA model for measuring the relative efficiencies of highway maintenance patrols*, Information Systems and Operational Research 28 (1990) 113-124.
- [4] Y. Roll, W. D. Cook, B. Golany, *Controlling factor weights in data envelopment analysis*, IIE Transactions 23 (1991) 29.
- [5] J. R. Doyle, *Multiattribute choice for the lazy decision-maker: let the alternatives decide!*, Organizational Behavior and Human Decision 62 (1995) 87-100.
- [6] F. Hosseinzadeh Lotfi, A. Hatami-Marbini, J. Agrell, N. Aghayi, K. Gholami, *Allocating fixed resources and setting targets using a common-weights DEA approach*, Computers and Industrial Engineering 64 (2013) 631-640.
- [7] C. Kao, H. T. Hung, *Data envelopment analysis with common weights: the compromise solution approach*, Journal of the Operational Research Society 56 (2005) 1196-1203.
- [8] R. Färe, S. Grosskopf, *Productivity and intermediate products: A frontier approach*, Economics Letters 50 (1996) 65-70.
- [9] C. Kao, S. N. Hwang, *Efficiency decomposition in two-stage data envelopment analysis: An application to non-life insurance companies in Taiwan*, European Journal of Operational Research 185 (2008) 418-429.
- [10] H. Fukuyama, W. L. Weber, *A slack-based inefficiency measure for a two-stage system with bad outputs*, Omega 38 (2010) 398-409.
- [11] K. Tone, M. Tsutsui, *Network DEA: a slack-based measure approach*, European Journal of Operational Research 197 (2009) 243-252.
- [12] C. Kao, *Efficiency decomposition in network data envelopment analysis: a relational model*, European Journal of Operational Research 192 (2009) 949-962.
- [13] S. Lozano, *Scale and cost efficiency analysis of networks of processes*, Expert Systems with Applications 38 (2011) 6612-6617.
- [14] C. Yang, H. M. Liu, *Managerial efficiency in Taiwan bank branches: A network DEA*, Economic Modelling 29 (2012) 450-461.
- [15] M. Tamiz, D. Jones, C. Romero, *Goal programming for decision making: An overview of the current state-of-the-art*, European Journal of Operational Research 111 (1998) 569-581.

- [16] R. Kazemi Matin, A. Azizi, *A unified network-DEA model for performance measurement of production systems*, EMeasurement 60 (2015) 186193.
- [17] M. Toloo, *An epsilon-free approach for finding the most efficient unit in DEA*, Applied Mathematical Modelling 38 (2014) 3182-3192.



Jafar Pourmahmoud is an assistant professor in Department of Applied Mathematics, Azarbaijan Shahid madani University. He has published papers in Bulletin of the Iranian Mathematical Society, Applied Mathematics and computation, Journal of Applied Environmental and Biological Sciences, International Journal of Industrial Mathematics and International Journal of Industrial Engineering Computations. His research interest is on Operations Research (specially on Network Data Envelopment Analysis and fuzzy DEA) and Numerical Linear Algebra and Applications.



Zeynal Zeynali is a Ph.D student in Azarbaijan Shahid Madani University in Operations Research field. He received his Ms.C degree from the kharazmi university.

A nonlinear model for common weights set identification in network Data Envelopment Analysis

J. Pourmahmoud, Z. Zeynali

مدل غیرخطی تعیین مجموعه وزن‌های مشترک در تحلیل پوششی داده‌های شبکه‌ای

چکیده:

در تحلیل پوششی داده‌ها برای اندازه‌گیری کارایی واحدها، اهمیت یا ارزش هریک از معیارها یا ورودی - خروجی‌ها مشخص می‌شود. از طرف دیگر در فرم مضربی مدل‌های سنتی تحلیل پوششی داده‌ها چالش صفر شدن و غیریکسان بودن اهمیت یا ارزش‌ها وجود دارد. یکی از راهکارهای مقابله با این چالش استفاده از مجموعه وزن‌های مشترک (ارزش‌های مشترک) برای معیارها یا ورودی - خروجی‌ها در تمامی واحدها است. در عمل برخی واحدهای تصمیم‌گیری شامل فرایندهای داخلی هستند. برای چنین واحدها تحلیل پوششی داده‌های سنتی واحد را به عنوان جعبه سیاه در نظر می‌گیرند، به همین خاطر تحلیل پوششی داده‌های شبکه‌ای معرفی شد. از طرف دیگر مشابه چالش ذکر شده در تحلیل پوششی داده‌های سنتی، چالش صفر شدن و غیریکسان بودن اهمیت یا ارزش‌ها برای ساختارهای شبکه‌ای نیز وجود دارد. برای رفع این مشکل در این مقاله سعی می‌شود با استفاده از مدل‌های غیرخطی، مجموعه وزن‌های مشترک (ارزش‌های مشترک) برای ساختارهای شبکه‌ای در حالت عمومی ارائه شود. در نهایت مدل‌های پیشنهادی روی مثال عددی بکارگرفته می‌شود.