

Treatment of Tannery Wastewater by Various Oxidation and Combined Processes

Rameshraj, D. and Suresh, S.*

Department of Chemical Engineering, Indian Institute of Technology Roorkee,
Roorkee-247 667, Uttarakhand, India

Received 15 April 2010;

Revised 27 Aug. 2010;

Accepted 5 Sep. 2010

ABSTRACT: A general overview on the prospective of various oxidation and combined processes in the treatment of tannery industry effluent are reported. Various oxidation and combined processes such as UV/H₂O₂/Hypochlorites, Fenton and Electro-oxidation, photo-chemical, photo-catalytic, electro-catalytic oxidation, wet air oxidation, ozonation, biological followed by ozone/UV/ H₂O₂, coagulation or electro-coagulation and catalytic treatments have been considered. The tannery wastewater with sulphide as main sources of pollutant, electro-coagulation is the best removal efficiency process among the other oxidation processes, whereas for chromium, photo catalytic oxidation process using nano-TiO₂ and wet air oxidation in the presence of manganese sulphate and activated carbon as a catalyst are more efficiency processes. The integrated combined processes described permit to meet disposal limits, health quality standards and the recovery of several chemicals utilized in the tanneries.

Key words: Pollution, Chromium, Sulphide, Integrated water

INTRODUCTION

Treatment of various wastewaters are become more important due to diminishing water resources, increasing wastewater disposal costs, and stricter discharge regulations that have lowered permissible contaminant levels in waste streams (Metcalf and Eddy, 1979; Matsumoto *et al.*, 1992; ESCWA, 2003). Tannery industry is the significant contributor to the economy and provides large scale employment opportunity for people of economically weaker part of the society. Tanning involves a complex combination of mechanical and chemical processes. The general flow sheet for tanning process was given in Fig. 1. The preservation and processing of raw hides and skins for tanning process cause severe pollution problem towards environment and mankind, rather than being important from economic and employment consideration (Aravindhan *et al.*, 2004). The tanning operation in which organic or inorganic materials become more chemically bound to the available substance and preserve it from deterioration. The substances generally used to accomplish the tanning process are chromium or extracts from bark of trees, such as chestnut. Two types of tanning operations based on tanning agents are chrome and vegetable tanning (Sarkar, 1981; Aravindhan *et al.*, 2004). The general process of

tanneries are vegetable tanning employs the use of extracts from the bark of various trees as the tanning agent. Mostly leathers are produced by chrome tanning compare to vegetable tanning (Sarkar, 1981). Chrome tanning produces leather better suited for certain applications, particularly for the upper parts of boots and shoes, and requires less processing time than traditional vegetable tanning (Sarkar, 1981).

The World production of leather product was 22700.5 M ft²/yr (FAO, 2008). Totally, 2500 tanneries are located in India including Tamilnadu 50%, West Bengal 20% and Uttar Pradesh 15% (CPCB, 2009). In India, the production of leather product was 1738 M ft²/yr (FAO, 2008). The characteristics of tannery effluent vary considerably from tannery to tannery depending upon the size of the tannery, chemicals used for a specific process, amount of water used and type of final product produced by a tannery effluent from a typical tannery. Wastewater from the tannery industry contains large quantities of biochemical oxygen demand (BOD), chemical oxygen demand (COD), sodium sulphide and suspended solids (SS) from the tannery process (Unick *et al.*, 1981; Abdel-Shafy *et al.*, 1995; Vijayaraghavan and Murthy, 1997; Iqbal *et al.*, 1998; Szpyrkowicz *et al.*, 2001). Some of tannery wastewater characteristics are given in Table 1.

*Corresponding author E-mail: schemdch@iitr.ernet.in

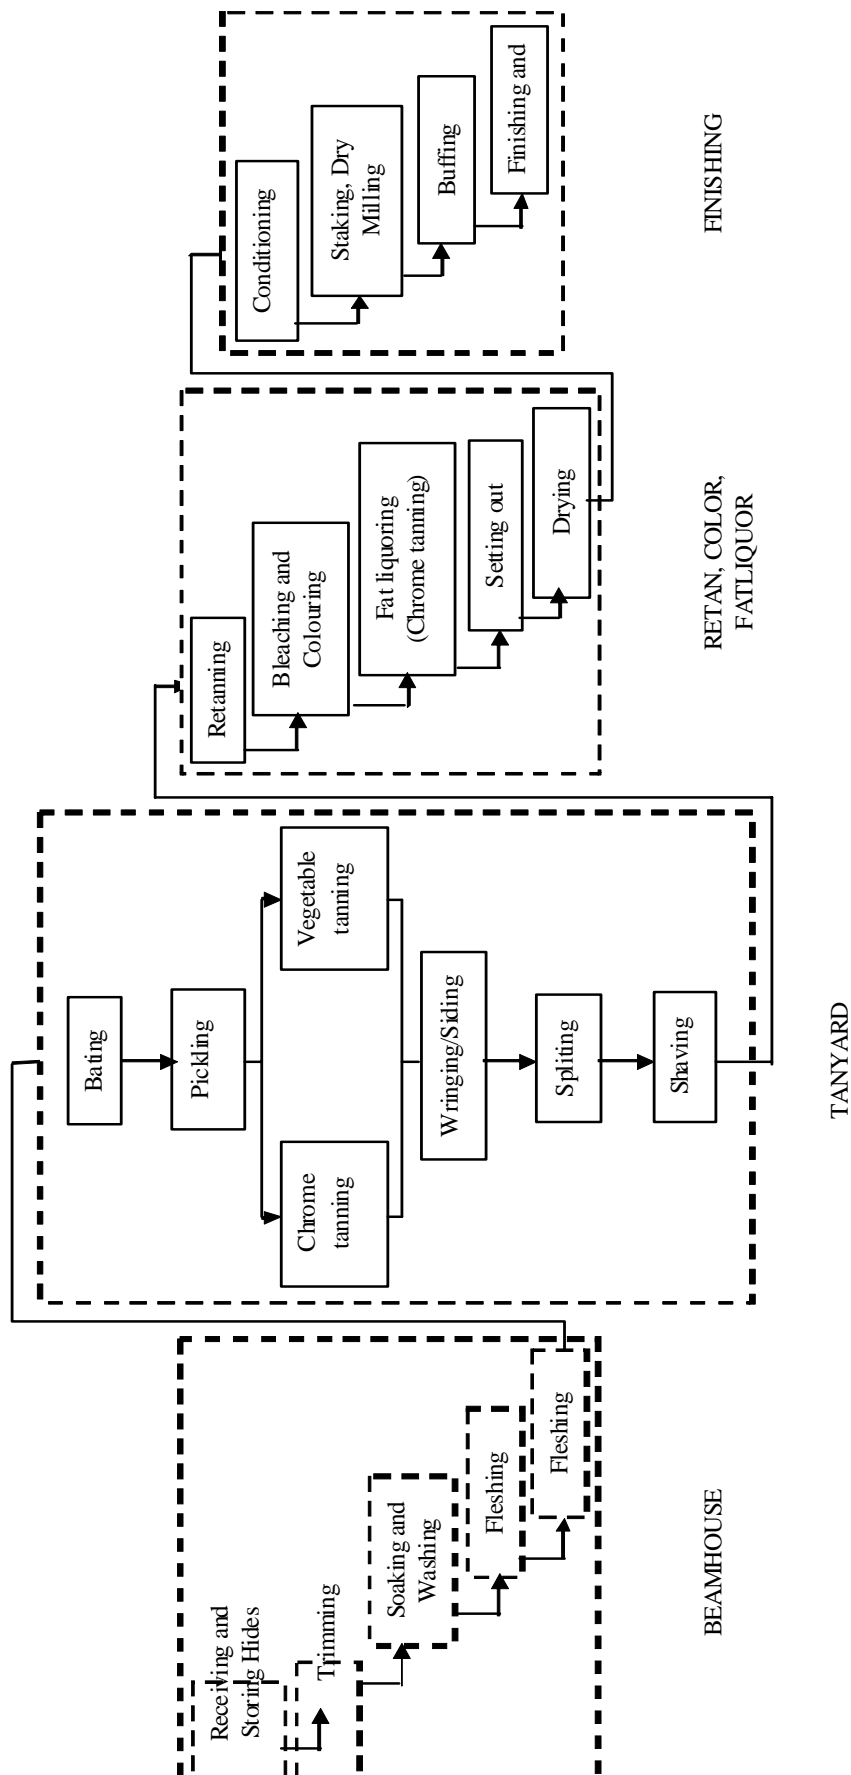


Fig. 1. General flow diagram for leather tanning and finishing process

Table 1. Characteristics of different types of tannery wastewater

	Vijayaraghavan and Murthy (1997)*		Iqbal et al. (1998)*	Szpyrkowicz et al. (2001)*
Types of tannery process	Vegetable	Chrome	Chrome	Chrome
COD	19700	20000	1187-2794	561-1450
TN	-	-	34-312	-
$N - NH_4^+$	-	-	18-157	207.5-350
Phenols	-	-	45-282	-
pH	7.3	3.5	6.6-8.1	5.46-8.9
Cl^-	1697	1728	1890-4810	5383
S^-	195	150	3-80	32-192
TSS	-	-	130-1240	-
VSS	-	-	217-1030	-
Chromium	-	178	-	1.3
Tannin	2900	1700	-	23.9-83.7
TKN	-	-	-	244.8-418.9
TOC	-	-	-	131-425

* All are mg/l unit except pH

In India, especially, Kanpur tannery industry polluted the environment. In 2003 the main tanneries effluent disposal unit was dumping 22 tonnes of Chromium laden solid waste per day. In tannery industry, effluents are produced upto 64 kilo tonnes of wastewater per year (Trujillo *et al.*, 2008). Conventional chrome tanning results in wastewater containing at high as 1500-3000 mg/l of chromium (Suresh *et al.*, 2001; Aravindhan *et al.*, 2004). The tanning industry is an especially large contributor of chromium pollution in India (Sarkar, 1981; Ramasami *et al.*, 1995). It was estimated that in India alone, ~ 2000–3000 tonnes of chromium escape into environment annually from the tanning industries, with chromium concentration ranging between 2000 and 5000 mg/l in the aqueous effluent, compared to the recommended permissible limit of 2 mg/l (EPA, 1990). Chromium has low acute and chronic toxicity to humans at high doses (Aravindhan *et al.*, 2004). Chromium toxicity is dependent on chemical speciation and thus associated health effects are influenced by chemical forms of exposure. Cr (VI) compounds are much more soluble than Cr (III) and are much more toxic (mutagenic and carcinogenic) to microorganisms, plants, animals and humans (Friberg *et al.*, 1980; Aravindhan *et al.*, 2004). The excess of Cr (III) is proven to be a potential soil, surface water, ground water and air contaminant under specific condition (Rao *et al.*, 1999; Aravindhan *et al.*, 2004). The number of tanneries in the United States has significantly decreased in the last 40 years due to the development of synthetic substitutes for leather, increased leather imports, and environmental regulation (EPA, 1990; Bienkiewicz, 1983). The potential

environmental standards for tannery effluents given by agencies were pH levels from 6.5 to 9, chromium value, sulphides and oil & grease in the wastewater should be less than 2 mg/l, 1 mg/l and 10 mg/l respectively, BOD₅, SS leaves from a tannery should be less than 100 mg/l and the wastewater generation 28 m³/tonne quantum per raw hide processed (EPA, 1990).

Wastewater treatment methods are broadly classified into physical, chemical and biological processes (Metcalf and Eddy, 1979; Matsumoto *et al.*, 1992). Various treatment for tannery wastewater like physico-chemical methods such as sedimentation (Song *et al.*, 2000), Electro floatation (Murugananthan *et al.*, 2004), Filtration (Cassano *et al.*, 1999; Tiglyene *et al.*, 2008) and Membrane filtration (Justina *et al.*, 2009), Precipitation (Kabdasli *et al.*, 2003; Esmaeili *et al.*, 2005) and Coagulation (Jing-Wei *et al.*, 2007; Haydar *et al.*, 2009; Zhi *et al.*, 2009; Espinoza-Quinones *et al.*, 2009; Sengil *et al.*, 2009), Adsorption (Santosa *et al.*, 2008; Covarrubias *et al.*, 2008), Ion exchange (Tiravanti *et al.*, 1997; Kabir and Ogbeide, 2008) and Biological methods such as (Martinez *et al.*, 2003; Farabegoli *et al.*, 2004; Murat *et al.*, 2006; Lefebvre *et al.*, 2006; Banu and Kaliappan, 2007; Munz *et al.*, 2008; Munz *et al.*, 2009; Zupancic and Jemec, 2010).

Schrank *et al.* (2004) has suggested that many organic compounds contained in wastewater are resistant to conventional chemical and/or biological treatment. The degradation of inhibitor substance such as tannin during the anaerobic digestion was investigated by Banu and Kaliappan (2007).

Polyelectrolyte precipitation was not yield satisfactory results for the treatment of leather tanning industry wastewaters (Kabdasli *et al.*, 2003). Generally, tannery effluents contain mostly sodium sulphide and (or) sodium hydrosulphide (EPA, 1990; Valeika *et al.*, 2006) which has significantly contributing for environmental pollution. The presence of sulphide in wastewaters may dramatically interfere with microbial activities and consequently disturb the function of the system (Mesdaghinia *et al.*, 1991). Biological process can be carried out only when concentration of sulphides is not exceeding 50 mg/l (Valeika, 2006). Aerobic treatment was not effective method for treatment of tannery effluent (Sekaran *et al.*, 1996; Ganesh and Ramanujam, 2009). Sekaran *et al.* (1996) have reported that anaerobic treatment of tannery wastewater in high rate close type reactors leaves sulfides in the range 31-795 mg/l, COD 395-1886 mg/l, BOD 65-450 mg/l and total organic carbon (TOC) 65-605 mg/l. So high sulfide concentration present in treated wastewater may not suitable for aerobic biological treatment. Sankar *et al.* (1998) and Yoochatchaval *et al.* (2008) has reported that a cost effective method was needed to remove the residual organics in biological treated wastewater as it received public attention from the neighborhood of discharge.

The choice of wastewater treatment process depends on several factors like efficiency, cost and environmental capability (Costa and Olivi, 2009). Moreover, the wastewater characteristics should also be considered when choosing the best process (Costa and Olivi, 2009). Few authors have previously reviewed the various techniques for treatment of tannery wastewater (Cassano *et al.*, 2001; Aravindhan *et al.*, 2004; Sharma *et al.*, 2008). Mostly, the sulphides are removed by using H_2O_2 and Electro oxidation process (Valeika *et al.*, 2006; Anglada *et al.*, 2009). Oxidation of sulfide by air using activated carbon as catalyst gained importance for its removal of COD, BOD and TOC in addition to elimination of sulfide in wastewater (Sekaran *et al.*, 1996). So, in this context, the tannery industry is review various oxidation and combined processes for the recovery and recycle of chemicals and water in order to avoid discharging of these products into the environment.

Tannery effluents are oxidized by four different reagents like ozone, hydrogen peroxide, Fenton oxygen, and air, in precise, pre-programmed dosages, sequences UV radiation. These procedures may also be combined with any one of oxidation process or agents are known as advanced oxidation process (AOP). The AOP procedure is particularly useful for cleaning biologically toxic or non-degradable materials such as aromatics, pesticides, petroleum constituents,

and volatile organic compounds in wastewater (Metcalf and Eddy, 1979; Matsumoto *et al.*, 1992). The contaminant materials are converted to a large extent into stable inorganic compounds such as water, carbon dioxide and salts, i.e. they undergo mineralization. Table 2 . lists out the various types of studies performed for treatment of tannery wastewater by various oxidation processes.

A search of the ISI web of knowledge shows a number of research articles on oxidation and combined process on treatment of tannery wastewater. Fig s 2 and 3 shows the yearly progress of publications and citations in the late twentieth century and during the present decade. These figures clearly indicate the increasing in the area of various oxidation and combined process to treat the tannery wastewater. Results of the investigation on treatment of tannery wastewater by various oxidation and combined processes have been reported in this study.

The various oxidation techniques (UV, TiO_2 /UV, O_3 , H_2O_2 /UV and O_3 /UV) to degrade tannery wastewater were reported by Schrank *et al.* (2004). The removal efficiency of COD, TOC, ammonia and sulphate were found to be 3%, 8.5%, 10% and 6% respectively by TiO_2 /UV process at pH 7. In the H_2O_2 /UV treatment, the COD removal was 60% in 4 h as a reaction time (Sauer *et al.*, 2006). *Artemia salina* (Dantaset *et al.*, 2003; Sauer *et al.*, 2006) and *Daphnia magna* (Schrank *et al.*, 2004) toxicity testing performed in parallel proved a decrease in toxicity after treatment of the tannery wastewater. Awan *et al.* (2003) was analysed that the recovery of chromium from tannery wastewater by H_2O_2 , sodium hypochlorite and calcium hypochlorite oxidants to soluble chromate. H_2O_2 was potentially a suitable oxidant as it could oxidize a suspension of $Cr(OH)_3$ to chromate to 98% and 88% in the synthetic and real wastewater. Awan *et al.* (2003) and Sauer *et al.* (2006) were observed that degradation rate of tannery pollutants increased as the H_2O_2 increased, but excessive H_2O_2 concentration was harmful because it acted as a hydroxyl radical forager since it can contend for the active sites of the TiO_2 . The percentage removal by the hypochlorites was lower than H_2O_2 (Awan *et al.*, 2003). Calcium hypochlorite was potentially a suitable oxidant as it COD removal was 76% (Awan *et al.*, 2004) when initial COD was 3413 mg/l in the tannery wastewater. Chlorine dioxide was used to removed the benzidine pollutants from tannery dyeing wastewater (~90%) (Cao *et al.*, 2007). Dantas *et al.* (2003) was evaluated that the efficiency of Fenton and Photo-Fenton processes for the treatment of wastewater from leather industry. 90% of COD removal was achieved in 4 h. The concentration of hydroxyl radicals ($\bullet OH$) increases as increase in the

Table 2. Some of Literature review for optimum conditions of Tannery wastewater treatment by various oxidation processes

Type of Oxidation process	Pollutants	Optimum conditions	References
Catalytic oxidation (MgSO ₄ or NiSO ₄)	Sulphide	Air flow rate = 0.8 l/min; Aeration time = 450 min; MgSO ₄ conc. = 270 mg/l; NiSO ₄ conc. = 260 mg/l	Mesdaghinia et al. (1991)
Electro-oxidation	Sulphides, Chromium	Anode: Ti/Pt; Cathode: Ti; Current density = 5.56 A /dm ²	Rao et al. (2001)
Fenton-photo Fenton process (fast and slow process)	COD	Ferrous ions = 1 g/l; Hydrogen peroxide = 15 g/l; Time = 20 and 240 min Time = 5 min;	Dantas et al. (2003)
Hydrogen peroxide	Chromium	Temperature = 100 °C	Awan et al. (2003)
TiO ₂ /UV	COD, TOC, NH_4^+ , SO_4^{2-}	Ozone dosage = 2.6 g O ₃ /h; pH = 7	Schrank et al. (2004)
O ₃ /UV	COD, TOC, NH_4^+ , SO_4^{2-}	Ozone dosage = 2.6 g O ₃ /h; pH = 11	Schrank et al. (2004)
Electro oxidation Hydrogen peroxide	COD, Color COD	Ti/PbO ₂ ; Ti/TiRuO ₂ Oxidant = Calcium Hypochloride; Time = 5 min;	Panizza et al. (2004) Awan et al. (2004)
Photo oxidation	COD, Chromium	Temperature = 100 °C Nano-TiO ₂ dosage = 100 mg/l; pH = 6; Radiation time = 480 min	Shi et al. (2006)
Photo oxidation	COD, Chromium	Time = 6 h; FeCl ₃ dosage = 3.36 mg/l; nano-TiO ₂ dosage = 100 mg/l	Yajun et al. (2006)
Fenton photo Fenton process	COD	H ₂ O ₂ dose = 840, 1679 mg/l; pH = 3.5; Reaction time = 90 min	Kurt et al. (2007)
Electro oxidation	COD, TOC	Current = 2.8 A; pH = 3.25; Electrolysis time = 60 min, Ti-Pt electrode	Ouejhani et al. (2008)
Electro coagulation and Electro fenton	COD and sulphide	Electric current = 33.3 mA /m ² ; Electricity consumption = 1.8 and 1.5 kWh/kg COD removed; 27.7 and 8.3 kWh/kg sulphide removed	Apaydin et al. (2008)
Ozonation	COD	Ozone flow rate = 6 × 10 ⁻³ m ³ /min; Ozonation time = 60 min; pH = 11	Preeti et al. (2009)
Photo oxidation	Chromium and Leather	Sodium sulphate = 0.1 mol/l; Nanoporous Ti/TiO ₂ electrode; pH = 2	Paschoal et al. (2009)

removal efficiency was observed, either before or after coagulation. The reduction of ammonia nitrogen amount for both processes not significant different was observed, because of attributed to the oxidation of nitrogen organic compounds, possibly forming N_2 and nitrate ions (Dantas *et al.*, 2003).

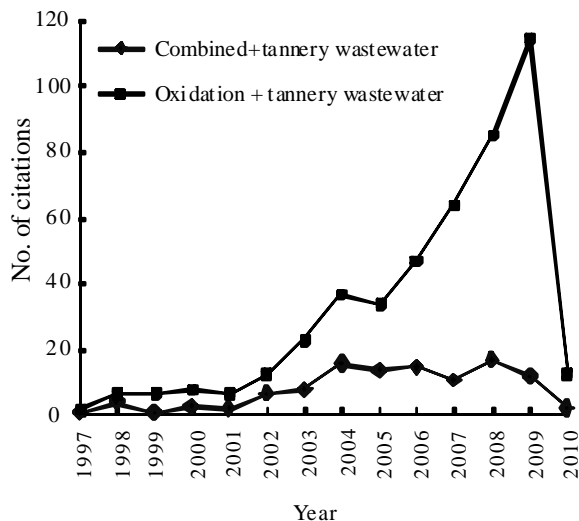


Fig. 2. Number of citations appearing with 'Oxidation', 'Combined' and Tannery wastewater in the topic as listed in the ISI Web of Science database for 'All Years' (1983–2010) (out of a total of 461 and 113 articles appearing; database searched 23.03.10). Note that early adsorption articles appeared in the late 1997s. The small number of papers in pre-1996 years means they cannot be properly shown in the figure

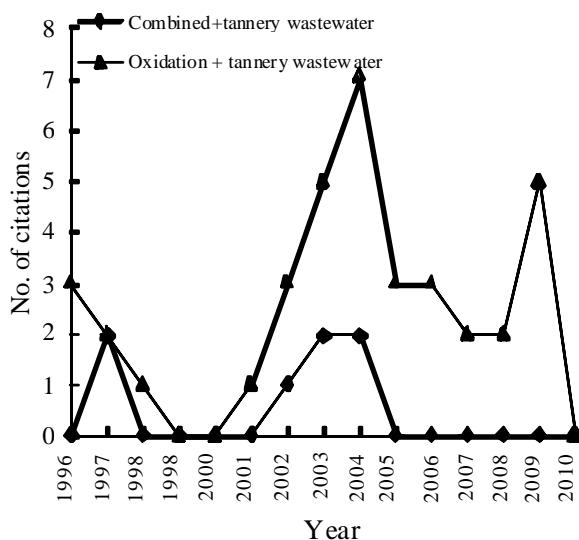


Fig. 3. Number of research papers appearing with 'Oxidation', 'Combined' and Tannery wastewater in the topic as listed in the ISI Web of Science database for 'All Years' (1983–2010) (out of a total of 38 and 7 articles appearing; database searched 23.03.10). Note that early adsorption articles appeared in the late 1990s. The small number of papers in pre-1989 years means they cannot be properly shown in the figure

Various types of electrodes like 3D (Rao *et al.*, 2009) and graphite electrode (Vijayalakshmi *et al.*, 2009) was used for oxidation of tannery wastewater by electrochemical treatment. Application of noble metals and metal oxides electrodes for treatment of tannery wastewater (Szpyrkowicz *et al.*, 2005). Marco *et al.* (2004) and Rao *et al.* (2001) found that electro oxidation method can be applied effectively for were vegetable tannery wastewater, allowing the complete removal of COD, tannin, and ammonium and decolourization. For example, the removal of chromium and sulphides was found to be 76% and 88% respectively and the energy consumption was 5.77 kWh/kg COD and 16.63 kWh/kg of NH_4^+ in a two-electrode stirred batch reactor. The order of efficiency of anodes was found to be $Ti/Pt > Ti/PbO_2 > Ti/MnO_2$ (Rao *et al.*, 2001). Szpyrkowicz *et al.* (2005) showed highest rate of ammonia removal was achieved while compared with other conventional electrodes. The reduction in TKN, protein and COD was 78.52%, 83.02% and 79.35% respectively and complete disinfection was also achieved (Vijayalakshmi *et al.*, 2009). In order to estimate the optimum conditions, some design methodology has been applied for treatment of tannery wastewater. A Doehlert design was used to optimize the significant experimental variables temperature, pH, current intensity and time over yields Cr (III) to Cr (IV) from aqueous and tanning baths effluents reported by Ouejhani *et al.* (2008). The results have shown that the current intensity and the electrolysis time were the main influent parameters on the removal ratio of COD, TOC and electrochemical oxidation of trivalent chromium. Another study was also shown by increasing the rate of oxidation by increasing the current density, pH and temperature of the solution in the presence of $Ti/TiRuO_2$ anode electrode (Marco *et al.*, 2004). Ozonation is a treatment process that destroys bacteria and other microorganisms through an infusion of ozone, a gas produced by subjecting oxygen molecules to high electrical voltages. The COD removal efficiency was 47% achieved even with low feeding time of 5 min at the selected ozone flow-rate of 42.8 mg/min by ozonation process (Dogruel *et al.*, 2004). The COD removal efficiency was 92% achieved by ozonation process (Preeti *et al.*, 2009).

Wet oxidation is the oxidation of dissolved or suspended components in wastewater using oxygen as the oxidizer. It is referred to as 'wet air oxidation', when air is used. The oxidation reactions occur in superheated water at a temperature above the normal boiling point of water ($100^\circ C$), but below the critical point ($374^\circ C$). Sekaran *et al.* (1995) was reported that removal of sulphide in limeyard wastewater by wet air oxidation in the presence of manganese sulfate as a

catalyst. During the oxidation of sulphide in lime yard wastewater, 92% of the total oxygen demand and 90% of the dissolved protein were also removed. The removal efficiency of sulphide increases to 99% when an activated carbon packed counter current reactor was used. Sankar *et al.* (1998) and Paschoal *et al.* (2009) was investigated the feasibility of the photo electrocatalytic oxidation of residual organic and leather acid dye, acid red 151. The photo electrocatalytic oxidation promotes 100% decolourization, reducing around 98-100% of Cr (VI) and achieving an abatement of 95% of the original total organic carbon (Paschoal *et al.*, 2009). The photocatalytic oxidation process using nano-TiO₂, the COD and chromium removal was 65% and 91.4% respectively, and the effluent biodegradability was great improved (Yajun *et al.*, 2006). Catalyst may be accelerates the rate of a chemical reaction without itself being consumed. It lowers the operating and or capital costs. The removal of sulphides was $\geq 98\%$ by catalytic oxidation (Mesdaghinia *et al.*, 1991).

AOPs, which are very effective in oxidization, decolorization and degradation of organic pollutants. The main drawback of advanced oxidation technologies is their operating cost high as compared to other conventional physicochemical or biological treatments. Therefore AOPs cannot achieve complete mineralization due to this constraint. One of the most reasonable solutions to this problem is coupling AOPs

with other treatment methods. Advanced oxidation processes often are employed as a pre-treatment method in an integrated system. This integration is acceptable commercially when intermediates are easily degradable in another process. The various integration AOPs and biological processes has been reviewed (Matsumoto *et al.*, 1992; Scott and Ollis, 1995; Kang and Hoffmann, 1998; Tabrizi and Mehrvar, 2004; Mohajerani *et al.*, 2009).

Physicochemical followed by biological treatment, especially activated sludge or lagoon systems are usual technology for wastewater treatment (Moura Alencar *et al.*, 2004; Mohajerani *et al.*, 2009). Generally these conventional treatments are incapable and donot often reach the limits to reduce all of the polluting parameters, COD, chlorides, sulphates and ammonia (Molinari *et al.*, 1997; Molinari *et al.*, 2001; Mohajerani *et al.*, 2009). Table 3. lists out the various types of studies performed for treatment of tannery wastewater by various combined process.

Electro-fenton process, electrocoagulation, electrochemical oxidation and Photo Electro Oxidation – Electro Dialysis (PEO-ED) were studied by various researchers (Apaydin *et al.*, 2009; Kurt *et al.*, 2007; Naumczyk and Rusiniak, 2005). Naumczyk and Rusiniak. (2005) were studied that process of tannery wastewater treatment by electrocoagulation and coagulation with FeCl₃ followed by advanced

Table 3. Some of Literature review for optimum conditions of Tannery wastewater using combined treatment

Type of combined treatment	Pollutants	Optimum conditions	Reference
SBBR with Chemical oxidation (ozone)	COD, Ammonia and Suspended solids	Ozone flow rate = 8.7 mg O ₃ /min; Sludge production = 4 kg TSS/kg COD	Iaconi et al. (2002)
SBBR process with ozonation	COD, TKN, and TSS	Sludge production = 4 kg/kgCOD; Organic loading = 2.6 kg COD/(m ³ day)	Iaconi et al. (2003)
CAACO system	COD, BOD, Sulphide and sulphate	Volumetric loading rate = 0.7376 m ³ /m ³ .day ; Surface loading rate = 0.2438 m ³ /m ² .day	Kennedy et al. (2004)
SBBR with ozone	COD, TKN and TSS	Sludge production = 0.05 kgVSS/kgCOD	Iaconi et al. (2004)
AOP with Fenton	COD, Ammonia	Fenton reaction time = 30 min	Naumczyk et al. (2005)
Electrochemical with Biological process	COD, Ammonia	Sludge production = 1.37 kg/m ³ day; Electrolysis time = 49 min	Szpyrkowicz et al. (2005)
Photo electrochemical with electrodialysis	COD; Ammonical nitrogen	Current Density = 36 mA/cm ² ; Ti electrode; Membrane area = 1.72 dm ² ; Membrane spacing = 0.75 mm	Rodrigues et al. (2008)
SBBR with Ozonation	COD, TSS,TKN, BOD, Color	Sludge production = 0.4 kg TSS/kg COD; Time = 5760 h and 2160 h.	Iaconi et al. (2009)

oxidation processes (Fenton reaction, O_3/OH^\cdot , O_3/H_2O_2 , and H_2O_2/UV). Coagulation followed by Fenton reaction in 30 min was recognized as the best method of purification of tannery wastewaters-COD was reduced by 85-88%. The purification effect obtained by AOPs decreased in the order: Fenton reaction $<O_3/OH^\cdot <O_3/H_2O_2 <H_2O_2/UV$. During the Electro-Fenton process, the removal efficiencies of COD and sulphide parameters were 54% and 85%, respectively, and electricity consumptions were also obtained as 1.5 kWh/kg COD removed and 8.3 kWh/kg sulphide removed. Furthermore, the removal efficiencies of total Chrome and suspended solids were found to be 97% and 70%, respectively (Apaydin *et al.*, 2009). During the electro-coagulation process, the removal efficiencies of COD and sulphide were 46% and 90%, respectively. Electricity consumptions were also obtained as 1.8 kWh/kg COD removed and 27.7 kWh/kg sulphide removed (Apaydin *et al.*, 2009). The Electro Fenton process and an electrochemical oxidation process were studied for COD treatment and were reduced by 60–70% within 10 min (Kurt *et al.*, 2007). The application of a PEO-ED process to an effluent from tannery was found to be effective with removal efficiency $>98.5\%$ for all ion species in effluent (Rodrigues *et al.*, 2008).

Various biological process followed by various oxidation process were reported for the treatment of tannery effluents (Szpyrkowicz *et al.*, 2005; Iaconi *et al.*, 2002, 2003, 2004; Kennedy *et al.*, 2004; Iaconi *et al.*, 2009). Iaconi *et al.* (2002) was reported to evaluate the performances of an innovative tannery wastewater process by sequencing batch biofilm reactor (SBBR) with chemical oxidation, performed by ozone. The average COD, NH_4-N and TSS removals were 97%, 98% and 99.9%, respectively. Furthermore, it was proved that the combined process is characterised by a very low sludge production was lower than the value reported for conventional biological systems. Similarly, Iaconi *et al.* (2003, 2004) were found that the average removal of COD, TKN, and TSS were 96%, 92% and 98% respectively. Kennedy *et al.* (2004) was reported that the combined treatment biological and catalytic oxidation for tannery wastewater by rice husk based mesoporous activated carbon—*Bacillus sp.* It was found that the reduction in COD, BOD, sulphide and sulphate were respectively 87%, 96%, 100% and 40% under an air oxidation of 2 h. Szpyrkowicz *et al.* (2005) was reported that a combination of electrochemical and biological processes for tannery wastewater. COD 80% reduction. In this case the energy requirement, of 29 kWh/m³ of treated wastewater, is much higher than the 8.47 kWh theoretically needed in a single-sludge biological plant. Iaconi *et al.* (2009) was investigated that the treatment of tannery wastewater by an aerobic

granular biomass system (SBBGR – Sequencing Batch Biofilter Granular Reactor) integrated with ozonation. The results show that the integrated process was able to achieve concentrations much lower than the current discharge limits. Furthermore, the process was characterised by a very low sludge production (i.e., 0.1 kg dry sludge/m³ of treated wastewater) with interesting repercussions on treatment costs (about 1 €/m³ of wastewater).

CONCLUSION

The treatment of tannery wastewater by different oxidation and combined processes was reviewed in the present paper. Some of the suggestions made by various author and present study were reported here. The main problem with AOPs is their high operating cost. The application of solar technologies to these processes could help to diminish that problem by reducing the energy consumption required for generating UV radiation. The maximum reduce the TOC content by mineralisation of the organic compounds using combined H_2O_2/UV and the Fenton's oxidation processes for the treatment of tannery wastewater. The H_2O_2 and Calcium hypochlorite were the most efficient oxidant while compared to other oxidant for removal of chromium pollutant from tannery wastewater. However, H_2O_2 alone is not effective for high concentration of certain refractory contaminants because of low rates of reaction at reasonable H_2O_2 concentration. Improvements can be achieved by using metal salts (iron salts) or ozone and UV-light can activate H_2O_2 to form hydroxyl radicals which are strong oxidants. Fenton Oxidation was successful in increasing both the extent and rate of biodegradation (soluble COD) in the treatment of tannery wastewater. Drawbacks associated with the use of fenton oxidants are the safety hazards associated with using H_2O_2 and the need to firstly reduce the pH, followed by a subsequent neutralisation. Iaconi *et al.* (2002) was concluded that treated effluent by SBBR with chemical oxidation well below the limit values fixed by the regulations. The electrochemical oxidation can be applied as a post-treatment after the conventional biological process in order to remove the residual ammonia with low energy consumption (Marco *et al.*, 2004; Rao *et al.*, 2001; Szpyrkowicz *et al.*, 2005). Marco *et al.* (2004) have recommended that the anode Ti/TiRuO₂ electrode have more energy consumption for complete COD removal, it was more stable and was not release toxic ions, so it was the best choice for industrial applications. However, Corrosion of electrode reduces the removal efficiency is the drawback of this method.

The advantage of treated tannery wastewater by ozonation can be achieved by enhancing the biodegradable compounds. The oxidation of inorganic

pollutants by ozone is usually fast and efficient except ammonia which is only slowly oxidized by ozone and OH radicals. The oxidation of organic pollutants can be directly oxidized by ozone and those which do not react with ozone. For the compounds, Ozonation is very efficient. For ozone resistant compounds, ozone based AOPs can be applied for this oxidation. For example, the ozonated process was higher removal efficiency than that obtained with the non-ozonated effluent by combining biological and chemical oxidation with ozone (Iaconi *et al.*, 1998). In wet air oxidation process, operating costs is low, minimal pollution discharge. However, high capital costs which is limitation of this method for treatment of tannery effluent. Photo oxidized process can be applied only to the transformation of recalcitrant to non-recalcitrant compounds, which subsequently can be easily degraded conventional techniques. More incident photons are require to produce an oxidation/reduction step i.e. Quantum efficiency values are very low, which the main limitation of this method. PEO-ED technique was significant reductions in all parameters tested, showing the success in removing heavy metals and ions present in the effluent (Rodrigues *et al.*, 2008). The photo-oxidized treated effluent was reused in leather processing while potable water was used as control (Sankar *et al.*, 1998).

The membrane process especially, reverse osmosis and nanofiltration are effective method for treatment of tannery wastewater. However, membrane fouling and large quantity of liquid waste and high costs were limitations of this method.

The best combination of process depends upon neither intrinsic advantages nor drawbacks that favours or exclude its utilization. However, individual system treatable testing must be done to find the best technology. From a practical point of view, treatment at source may be pragmatic/down-to-earth option and challenge of the further improve the overall performance, AOPs technology is the acquisition of a cheaper understanding of all the mechanism (example, affects the chemical kinetics and/or the overall efficiency) occurring within the process and then optimization techniques be developed to consistency for the process.

REFERENCES

Anglada, A., Urtiaga, A. and Ortiz, I. (2009). Contributions of electrochemical oxidation to waste-water treatment: fundamentals and review of applications, *J. Chem. Technol. Biot.*, **84** (12), 1747-1755.

Apaydin, O., Kurt, U. and Gonullu, M. T. (2009). An Investigation on the treatment of tannery wastewater by Electrocoagulation. *Global NEST Journal*, **11** (4), 546-555.

Aravindhnan, R., Madhan, B., Rao, R., Nair, B. and Ramasami, T. (2004). Bioaccumulation of chromium from tannery wastewater an approach for chrome recovery and reuse, *Env. Sci. Technol.*, **38**, 300-306.

Awan, M. A. (2004). Reduction of chemical oxygen demand from tannery wastewater by oxidation, *Electron. J. Environ., Agr. Food Chem.*, **3** (1), 625-628.

Awan, M. A., Baig, M. A., Iqbal, J., Aslam, M. R. and Ijaz, N. (2003). Recovery of Chromate from Tannery Wastewater, *J. Environ., Agr. Food Chem.*, **2** (5), 543-548.

Banu R and Kaliappan S. (2007). Treatment of tannery wastewater using hybrid upflow anaerobic sludge blanket reactor, *J. Environ. Eng. Sci.*, **6**, 415-421.

Calder, L. M. (1988). Chromium contamination of groundwater.

Cao, X. Y., Huang, J. L., Cui, C. W. and Li, S. F. (2007). Benzidines in tannery dye wastewater: Oxidative degradation by chlorine dioxide, *J. Soc. Leath. Tech. Ch.*, **91** (4), 145-148.

Cassano, A., Criscuoli, A., Drioli, E. and Molinari, R. (1999). Clean operations in the tanning industry: aqueous degreasing coupled to ultra filtration, *Clean Products and Processes*, **1**, 257-263.

Cassano, A., Molinali, R., Romomo, M. and Drioli, E. (2001). Treatment of aqueous effluents of the leather industry by membrane processes a review, *J. Membrane Sci.*, **181**, 111-126.

Chandra, P., Sinha S. and Rai U. N. (1997). Bioremediation of chromium from water and soil by vascular aquatic plants. *Aquatic Botany Laboratory, National Botanical Research Institute, Lucknow-226 001, India*

Costa, C. R. and Olivi, P. (2009). Effect of Chloride concentration on the electrochemical treatment of a synthetic tannery wastewater, *Electrochim. Acta*, **54** (7), 2046-2052.

Covarrubias, C., Garcia, R., Yanez, J. and Arriagada, R. (2008). Preparation of CPB-modified FAU zeolite for the removal of tannery wastewater contaminants, *J. Porous Mat.*, **15** (4).

CPCB, (2009). Recovery of better quality reusable salt from soak liquor of tanneries in solar evaporation pans, Central Pollution Control Board (CPCB) Ministry of Environment & Forests Control Of Urban Pollution Series:Cups/ 2009-10.

Dantas, T. L. P., Jose, H. J. and Moreira, R. F. P. M. (2003). Fenton and Photo-Fenton oxidation of tannery wastewater, *Acta Scientiarum. Tech.*, **25** (1), 91-95.

Dogruel, S., Genceli, E. A., Babuna, F. G. and Orhon, D. (2004). Ozonation of Nonbiodegradable Organics in Tannery Wastewater, *J. Environ. Sci. Heal. A—Toxic/Hazard. Substances & Environ. Eng.*, **A39** (7), 1705-1715.

Dogruel, S., Genceli, E., Babuna, F. and Orhon, D. (2006). An investigation on the optimal location of ozonation within biological treatment for a tannery wastewater, *J. Chem. Technol. Biote.*, **81** (12), 1877-1885.

- ECSWA. (2003). Waste-Water Treatment Technologies: A General Review, Economic and Social Commission for Western Asia, United Nations New York.
- Esmaili, A., Mesdaghi nia, A. and Vazirinejad, R. (2005). Chromium (III) Removal and Recovery from Tannery Wastewater by Precipitation Process, *American J. Appl. Sci.*, **2** (10), 1471-1473.
- Espinoza-Quinones, F., Fornari, M., Modenes, A. N., Palacio, S. M., Silva, F. G., Szymanski, N., Kroumov, A. D. and Trigueros, D. (2009). Pollutant removal from tannery effluent by electrocoagulation, *Chem. Eng. J.*, **151**, 59-65.
- EPA, (1990). Environmental Standards for Tannery effluents, EPA notification (G.S.R 742(E) dt.30th August.
- FAO, (2008). Management of Waste from animal product processing, Food and Agricultural Organisation of United Nations (FAO).
- Farabegoli G., Carucci A., Majone M. and Rolle E. (2004). Biological treatment of tannery wastewater in the presence of chromium, *J. Environ. Manage.*, **71**, 345-349.
- Friberg, L., Nordberg, G. F. and Work, V. B. (1980). Handbook of toxicity of metals, Elsevier Medical press: North Holland.
- Ganesh, R. and Ramanujam R. A. (2009). Biological waste management of Leather tannery effluent in India: Current options and Future research needs, *Int. J. Env. Eng.*, **1**, 165-186.
- Haydar, S. and Aziz, J. A. (2009). Coagulation-flocculation studies of tannery wastewater using cationic polymers as a replacement of metal salts, *Water Sci. Technol.*, **59**, 381-390.
- Huitle, M., Quiroz, M. A., Comminellis, C., Fello, S. and Battisti, A. D. (2004). *Electrochem. Acta*, **50**, 949.
- Iaconi, C., Ramadori, R. and Lopez, A. (2009). The effect of ozone on tannery wastewater biological treatment at demonstrative scale, *Bioresource Technol.*, **100**, 6121-6124.
- Iaconi, D., Bonemazzi, F., Lopez, A. and Ramadori, R. (2004). Integration of chemical and biological oxidation in a SBBR for tannery wastewater treatment, *Water Sci. Technol.*, **50** (10), 107-114.
- Iaconi, D., Lopez, A., Ramadori, R. and Passino, R. (2003). Tannery Wastewater Treatment by Sequencing Batch Biofilm Reactor, *Environ. Sci. Technol.*, **37** (14), 3199-3205.
- Iaconi, D., Lopez, A., Ramadori, R., Pinto, D. and Passino, R. (2002). Combined chemical and biological degradation of tannery wastewater by a periodic submerged filter (SBBR), *Water Res.*, **36**, 2205-2214.
- Iaconi, D., Pinto, D., Ricco, G. and Tomei, M. (2002). Treatment options for tannery wastewater II: integrated chemical and biological oxidation, *Ann Chim.*, **92** (5-6), 531-539.
- Iaconi, D., Ricco, G., Tanzarella, C. and Tomei, M. (1998). Chemical oxidation combined with biological oxidation in removal of biorefractory compounds, *Annali di Chimica*, **88** (11-12), 849-858.
- Iqbal, M., Haque, I. and Berns J. A. S. (1998). The Leather Sector, Environmental Report, Environmental Technology Programme For Industry (ETPI), Federation of Pakistan Chambers of Commerce and Industry, Federation House, Karachi, Pakistan.
- Jing-wei, F., Ya-bing, S., Zheng, Z., Ji-biao, Z., Shu, L. and Yuan-chun, T. (2007). Treatment of tannery wastewater by electrocoagulation, *J. Environ. Sci.*, **19**, 1409-1415.
- Justina, C., Elsa, M., Ana, P., Ana, L., Luis, S. and Maria, N. (2009). Membrane-based treatment for tanning wastewaters, *Can. J. Civil Eng.*, **36** (2), 356-362.
- Kabdasli, I., Olmez, T. and Tunay O. (2003). Nitrogen removal from tannery wastewater by protein recovery, *Water Sci. Technol.*, **48** (1), 215-223.
- Kennedy, L.J., Das, K.M. and Sekaran, G. (2004). Integrated biological and catalytic oxidation of organics/inorganics in tannery wastewater by rice husk based mesoporous activated carbon—*Bacillus* sp., *Carbon*, **42**, 2399-2407.
- Kurt, U., Apaydin, O. and Gonullu, M. T. (2007). Reduction of COD in wastewater from an organized tannery industrial region by Electro-Fenton process, *J. Hazar. Mater.*, **143**, 33-40.
- Lefebvre O., Vasudevan N., Torrijos M., Thanasekaran K. and Moletta R. (2006). Anaerobic digestions of tannery soak liquor with an aerobic post-treatment, *Water Res.*, **40**, 1492 – 1500.
- Marco, P. and Giacomo, C. (2004). Electrochemical Oxidation as a Final Treatment of Synthetic Tannery Wastewater, *Environ. Sci. Technol.*, **38** (20), 5470-5475.
- Martinez, J.M., Goltara, A. and Mendez R. (2003). Tannery wastewater treatment: comparison between SBR and MSBR, *Water Sci. Technol.: Water Supply*, **3** (5-6), 275-282.
- Mesdaghinia, A.R. and Yousefi, Z. (1991). The use of oxygen in catalytic oxidation of sulphides in tannery wastes, *Iranian J. Publ. Health*, **20** (1-4).
- Metcalf. and Eddy. (1979). *Wastewater Engineering: Treatment, Disposal, Reuse*, 2nd ed., McGraw-Hill, New York.
- Munz, G., Gori, R., Cammilli, L. and Lubello, C. (2008). Characterization of tannery wastewater and biomass in a membrane bioreactor using respirometric analysis. *Bioresource Technol.*, **99**, 8612-8618.
- Murat S., Insel G., Artan N. and Orhon D. (2006). Performance evaluation of SBR treatment for nitrogen removal from tannery wastewater. *Water Sci. Technol.*, **53** (12), 275-284.
- Murugananthan, M., Raju, B. G. and Prabhakar, S. (2004). Separation of pollutants from tannery effluents by electro flotation. *Sep. Purif. Technol.*, **40**, 69-75.
- Naidu, A. S. (2000). Indian leather industry in 21st century: challenges and opportunities, *Yojana*, March, 13-21.
- Naumczyk, J. and Rusiniak, M. (2005). Physicochemical and Chemical Purification of Tannery Wastewaters. *Pol. J. Environ. Stud.*, **14** (6), 789-797.

- NTP, (2007). TOX 72: NTP Report on Sodium Dichromate Dihydrate (CAS No. 7789-12-0) Administered in Drinking Water to Male and Female F344/N Rats and B6C3F1 Mice and Male BALB/ c and am3-C57BL/6 Mice, National Toxicology Program, North Carolina.
- Ouejhani, A., Hellal, F., Dachraoui, M., Lalleve, G. and Fauvarque, J. F. (2008). Application of Doehlert matrix to the study of electrochemical oxidation of Cr(III) to Cr(VI) in order to recover chromium from wastewater tanning baths. *J. Hazard. Mater.*, **157**, 423-431.
- Paschoal, F. M. M., Anderson, M. A. and Zanoni, M. V. B. (2009). Simultaneous removal of chromium and leather dye from simulated tannery effluent by photo electrochemistry. *J. Hazard. Mater.*, **166** (1), 531-537.
- Preethi, V., Kalyani, P. K. S., Iyappan, K., Srinivasakannan, C., Balasubramaniam, N. and Vedaraman, N. (2009). Ozonation of tannery effluent for removal of cod and color. *J. Hazard. Mater.*, **166**, 150-154.
- Ramasami, T., Rajamani, S. and Rao, J. R. (1995). Pollution Control in Leather Industry: Emerging Technological Options, CLRI, Adyar, Madras, India.
- Rao, J.R., Gayatri, R., Rajaram, R., Nair, B.V. and Ramasami, T. (1999). Chromium(III) hydrolytic oligomers: Their relevance to protein binding. *Biochim. Biophys. Acta* **1472**, 595-602.
- Rao, N. N., Somasekhar, K. M., Kaul, S. N. and Szpyrkowicz, L. (2001). Electrochemical oxidation of tannery wastewater. *J. Chem. Technol. Biot.*, **76** (11), 1124-1131.
- Rao, N. N., Priyanka, P., Rakesh, L., Rohit, M., Nandy, T. and kaul, S. N. (2009). Anodic oxidation of recalcitrant organics in tannery wastewater on carbon anode, *Chem. Eng. World*, **44** (9), 77-80.
- Rodrigues, M. A. S., Amado, F. D. R., Xavier, J. L. N., Streit, K. F., Bernardes, A. M. and Ferreira, J. Z. (2008). Application of photoelectrochemical-electrodialysis treatment for the recovery and reuse of water from tannery effluents. *J. Clean. Prod.*, **16**, 605-611.
- Sankar, M., Sekaran, G., Sadulla, S., Shanmugasundaram, K. A. and Mariappan, M. (1998). Recycling of tannery effluent through photo-oxidation method, *Indian J. Environ. Prot.*, **18** (3), 206-210.
- Santosa, S., Siswanta, D., Sudiono, S. and Utarianingrum, R. (2008). Chitin-humic acid hybrid as adsorbent for Cr (III) in effluent of tannery wastewater treatment. *Appl. Surf. Sci.*, **254**, 7846-7850.
- Sarkar, K. T. (1981). Theory and Practice of Leather Manufacture, Ajoy Sorcar, Madras, India.
- Sauer, T. P., Casaril, L., Oberziner, A. L. B., Jose, H. J. and Moreira, R. F. P. M. (2006). Advanced oxidation processes applied to tannery wastewater containing Direct Black 38— Elimination and degradation kinetics. *J. Hazard. Mater.*, **B135**, 274-279.
- Schrank, S. G., Jose, H. J. and Moreira, R. F. P. M. and Schroder, H. F. (2004). Comparison of different Advanced Oxidation Process to reduce toxicity and mineralisation of tannery wastewater. *Water Sci. Technol.*, **50** (5), 329-334.
- Schrank, S. G., Jose, H. J., Moreira, R. F. P. M. and Schroder H. (2005). Applicability of Fenton and H₂O₂/UV reactions in the treatment of tannery wastewaters. *Chemosphere*, **60**, 644-655.
- Sekaran, G., Chitra, K. and Mariappan, M. (1995). Removal of sulfide in tannery effluent by wet oxidation. *J. Soc. Leath. Tech. Ch.*, **79** (4), 123-126.
- Sekaran, G., Chitra, K., Mariappan, M. and Raghavan, K. V. (1996). Removal of sulfide in anaerobically treated tannery wastewater by wet air oxidation. *J. Environ. Sci. Heal. A*, **31** (3), 579-98.
- Sengil, A., Kulac, S. and Ozacar, M. (2009). Treatment of tannery liming drum wastewater by electrocoagulation. *J. Hazard. Mater.*, **167**, 940-946.
- Song, Z., Williams, C. J. and Edyvean R. G. J. (2000). Sedimentation of Tannery Wastewater. *Water Res.*, **34** (7), 2171-2176.
- Suresh, V., Kanthimathi, M., Thanikaivelan, P., Rao, J.R. and Nair, B.V. (2001). *J. Clean. Prod.*, **9**, 483-491.
- Szpyrkowicz, L., Kaul, S. N. and Neti, R. N. (2005). Tannery wastewater treatment by electro-oxidation coupled with a biological process. *J. Appl. Electrochem.*, **35**, 381-390.
- Szpyrkowicz, L., Kaul, S.N., Neti, R.N. and Satyanarayan, S. (2005). Influence of anode material on electrochemical oxidation for the treatment of tannery wastewater, *Water Res.*, **39**, 1601-1613.
- Szpyrkowicz, L., Kelsall, G., Kaul, S. and Faveri, M. (2001). Performance of electrochemical reactor for treatment of tannery wastewaters, *Chem. Eng. Sci.*, **56**, 1579-1586.
- Tiglyene, S., Jaouad, A. and Mandi, L. (2008). Treatment of Tannery Wastewater by Infiltration Percolation: Chromium Removal and Speciation in Soil. *Environ. Technol.*, **29** (6), 613 – 624.
- Tiravanti, G., Petruzzelli, D. and Passino, R. (1997). Pretreatment of Tannery wastewaters by an ion exchange process for Cr(III) removal and recovery. *Water Sci. Tech.*, **36** (2-3), 197-207.
- Trujillo, N., Mondragon, C., Vasquez-Murrieta, M.S., Cleemput, V. and Dendooven, L. (2008). Inorganic N dynamics and N₂O production from tannery effluents irrigated soil under different water regimes and fertilizer application rates: A laboratory study. *Appl. Soil Ecol.*, **38**, 279-288.
- Valeika, V., Beleska, K. and Valeikiene, V. (2006). Oxidation of sulphides in tannery wastewater by use of Manganese (IV) oxide. *J. Environ. Stud.*, **15** (4), 623-629.
- Vijayalakshmi, P., Rajeswari, G., Sundarapandian, S., Chandrasekar, R. and Saravanan, P. (2009). Electro-Oxidation of saline wastewater from tannery and reuse of recovered salt, *J. Am. Leath. Ch. Asso.*, **104** (11), 384-391.

Vijayaraghavan, K. and Murthy, D. V. S. (1997). Effect of toxic substances in anaerobic treatment of tannery wastewaters, *Bioproc. Eng.*, **16**, 151-155.

Yajun, S. (2006). Treatment of tannery wastewater by nano-TiO₂ photocatalytic oxidation. *Huagong Huanbao*, **26** (1), 13-16.

Zhi, X., Qingzhi, F. and Weilei, Z. (2009). Research on orthogonal coagulated setting and coagulation-flotation test of tannery wastewater. *J. Environ. Sci. Supp.*, S158-S161.

Zouboulis, A. I., Kydros, K. A. and Matis, K. A. (1995). Removal of hexavalent chromium anions from solutions by pyrite fines. *Water Res.*, **29** (7), 1755-1760.

Zupancic, G. and Jemec, A. (2010). Anaerobic digestion of tannery waste: Semi-continuous and anaerobic sequencing batch reactor processes, *Bioresource Technol.*, **101**, 26-33.

Kabir, G. and Ogbeide, S. E. (2008). Removal of Chromate in Trace Concentration Using Ion Exchange From Tannery Wastewater. *Int. J. Environ. Res.*, **2** (4), 377-384.

Yoochatchaval, W., Ohashi, A., Harada, H., Yamaguchi, T. and Syutsubo, K. (2008). Characteristics of granular sludge in an EGSB reactor for treating low strength wastewater. *Int. J. Environ. Res.*, **2** (4), 319-328.