

Identifying the time of a step change in AR(1) auto-correlated simple linear profiles

Majid Khedmati¹ · Seyed Taghi Akhavan Niaki¹

Received: 11 June 2014 / Accepted: 13 May 2015 / Published online: 2 June 2015
© The Author(s) 2015. This article is published with open access at Springerlink.com

Abstract Assuming a first-order auto-regressive model for the auto-correlation structure between observations, in this paper, a transformation method is first employed to eliminate the effect of auto-correlation. Then, a maximum likelihood estimator (MLE) of a step change in the parameters of the transformed model is derived and three separate EWMA control charts are used to monitor the parameters of the profile. The performance of the proposed change-point estimator is next compared to the one of the built-in change-point estimator of EWMA control chart through some simulation experiments. The results show that the proposed MLE of the change point accurately estimates the true change point and outperforms the built-in estimator of EWMA chart for almost all shift values and auto-correlation coefficients, while the built-in estimator of EWMA chart, in general, underestimates the true change point.

Keywords Change point · Maximum likelihood estimator (MLE) · Step change · Simple linear profile · Within-profile auto-correlation

Introduction and literature review

Statistical control charts have been widely used in industries to monitor quality characteristics and states of processes. By distinguishing between common and special causes of variability, they determine the state of a process and generate a signal when the process moves to an out-of-control condition. Following a signal from a control chart, process engineers initiate a search to identify and remove the root causes of variation. However, due to the inertia property of control charts, the signaling time is different from the real time at which a process starts to be affected by special causes (change point) and in most cases, the change had really occurred much earlier than the signaling time. Despite the efficiency of control charts in monitoring process changes, they do not provide any specific information about the time and the root causes of process variation. Therefore, providing an accurate estimate of the change point would enable process engineers to eliminate the root causes in a quick manner and improve the quality of processes.

Many researchers proposed change-point estimates of processes with quality characteristics following various probability distributions. While Samuel et al. (1998a, b), Pignatiello and Samuel (2001), Ghazanfari et al. (2008), Perry et al. (2006, 2007), Perry and Pignatiello (2005, 2006, 2010), Fahmy and Elsayed (2006), and Noorossana and Shadman (2009) proposed procedures to estimate the change point in the parameters of univariate distributions, Nedumaran et al. (2000), Atashgar and Noorossana (2010), Niaki and Khedmati (2012, 2013, 2014a, b), and Sullivan and Woodall (2000) considered change-point estimations in the parameter vectors of multivariate distributions. However, in some applications, the quality of a process can be better characterized by a relationship between a

✉ Seyed Taghi Akhavan Niaki
Niaki@Sharif.edu
Majid Khedmati
majid.khedmati@yahoo.com

¹ Department of Industrial Engineering, Sharif University of Technology, Azadi Ave., P.O. Box 11155-9414, 1458889694 Tehran, Iran

response variable and one or more predictors. Such a relationship is commonly referred to as a profile and may be represented by a simple linear, a multiple linear, a polynomial, or a nonlinear regression model. Simple linear profiles are mostly used in calibration applications and are widely studied in the literature for both Phases I and II monitoring; see, for example, Kang and Albin (2000), Kim et al. (2003), Zhang et al. (2009), Saghaei et al. (2009), Mahmoud and Woodall (2004), Mahmoud et al. (2010), Soleimani et al. (2009), and Hossienifard et al. (2011). Besides, some authors including Mahmoud (2008), Jensen et al. (2008), Amiri et al. (2012), and Kazemzadeh et al. (2010) considered more complicated models such as multiple linear and polynomial regression profiles.

Although there exist remarkable research efforts on developing methods to monitor profiles in Phases I and II, only a few research works have been performed to estimate the change point of processes monitored by profiles. To name a few, Zou et al. (2007) proposed a maximum likelihood estimator of a step-change point in the parameters of a general linear profile in Phase II and showed their method works well. In another work, Zou et al. (2006) developed a likelihood ratio statistic to estimate a step-change point in the parameters of a simple linear profile in Phase I. In another work, Eyvazian et al. (2011) proposed a method based on the likelihood ratio approach to estimate the time of a step change in the parameters of a multivariate multiple linear regression profile in Phase II. Sharafi et al. (2013) proposed a maximum likelihood estimator of a step-change point in binary response profiles in which logistic regression was used to model the relationship between a binary response and explanatory variables. In another work, Sharafi et al. (2013) developed a maximum likelihood estimator for identifying step-change points in Phase-II monitoring of Poisson regression profiles. Interested readers are referred to Zand et al. (2013), Kazemzadeh et al. (2014), Keramatpour et al. (2013), and Sharafi et al. (2013) for more references.

Although in some applications the error terms in successive profiles are auto-correlated [see for example Jensen et al. (2008); Kazemzadeh et al. (2010); Noorossana et al. (2008); Zhang et al. (2014); Keramatpour et al. (2014); Niaki et al. (2014); Jensen and Birch (2009); Amiri et al. (2010); and Khedmati and Niaki (2015)], to the best of authors' knowledge there has not been any research work on estimating the time of a step change in auto-correlated simple linear profiles in Phase II. Therefore, in this paper, a maximum likelihood estimator of a step change in the parameters of auto-correlated simple linear regression profiles is first proposed in which the auto-correlation structure between observations in each profile is assumed to follow a first-order auto-regressive, AR(1), model. Then, the performance of the proposed procedure is compared to

one of the built-in change-point estimator of EWMA control chart, where three EWMA control charts are applied to monitor the parameters of an auto-correlated simple linear profile.

The organization of the rest of the paper is as follows: In the next section, the auto-correlated simple linear regression model and the transformation method to eliminate the effect of auto-correlation within each profile is described. The process is modeled and the maximum likelihood estimator of the change point is derived in "Process modeling and MLE derivation" section. The performance of the proposed change-point estimators is evaluated and is compared to one of the built-in estimator of EWMA chart in "Performance evaluation" section through some simulation experiments. An illustrative example is provided in "Cardinality and coverage performances of the confidence set estimator" section to demonstrate the application of the proposed methodology. Finally, concluding remarks are presented in "An illustrative example" section.

Auto-correlated simple linear regression model

For the j th sample collected over time, the observations are denoted by (x_i, y_{ij}) , $i = 1, 2, \dots, n$, where it is assumed there exist an auto-correlation between the error terms and that within-profile observations at different values of the predictor variable x are modeled by a first-order auto-regressive, AR(1), model. Based on this model, when the process is in statistical control, the relationship between the response variable y_{ij} , the predictor variable and the error terms is

$$\begin{aligned} y_{ij} &= A_0 + A_1 x_i + \varepsilon_{ij}, \\ \varepsilon_{ij} &= \varphi \varepsilon_{(i-1)j} + a_{ij}, \end{aligned} \quad (1)$$

where A_0 and A_1 are model parameters, ε_{ij} 's are the correlated error terms, $0 < \varphi < 1$ is the auto-correlation coefficient, and a_{ij} 's are independent and identically distributed (iid) normal random variables with mean zero and variance σ^2 , i.e., $N(0, \sigma^2)$. We assume that the x values are fixed and constant from profile to profile. Moreover, as the change-point estimation is aimed in Phase-II monitoring of auto-correlated simple linear profiles, the in-control values of the parameters A_0 , A_1 , σ^2 , and φ are assumed known.

Considering the auto-correlation structure between the error terms, observations in successive profiles can be expressed by $y_{ij} = A_0 + A_1 x_i + \varepsilon_{ij}$ and $y_{(i-1)j} = A_0 + A_1 x_{(i-1)} + \varepsilon_{(i-1)j}$. Deriving the correlated error terms ε_{ij} and $\varepsilon_{(i-1)j}$ from these equations and replacing them into the AR(1) auto-correlation structure shown in Eq. (1) leads to

$$y_{ij} - (A_0 + A_1 x_i) = \varphi [y_{(i-1)j} - (A_0 + A_1 x_{(i-1)})] + a_{ij}. \quad (2)$$

According to Eq. (2), there exist auto-correlations between observations within each profile. Soleimani et al. (2009) showed that the existing auto-correlation between the error terms within each profile affects the performance of the control charts for simple linear profiles. Therefore, they applied a transformation to eliminate the effect of auto-correlation. In this transformation, one first transforms the observations using Eq. (3).

$$y'_{ij} = y_{ij} - \varphi y_{(i-1)j}. \quad (3)$$

Then, she/he replaces the observations y_{ij} and $y_{(i-1)j}$ by their equivalents in Eq. (1). This leads to a simple linear regression model with independent error terms as

$$y'_{ij} = A_0(1 - \varphi) + A_1(x_i - \varphi x_{i-1}) + (\varepsilon_{ij} - \varphi \varepsilon_{(i-1)j}). \quad (4)$$

Finally, the following model is obtained

$$y'_{ij} = A'_0 + A'_1 x'_i + a_{ij}, \quad (5)$$

where $A'_0 = A_0(1 - \varphi)$, $A'_1 = A_1$, $x'_i = x_i - \varphi x_{i-1}$, and a_{ij} 's are independent normal random variables with mean zero and variance σ^2 .

Now, the EWMA-3 method, first introduced by Kim et al. (2003), is applied to monitor the transformed simple linear profile with uncorrelated observations in Phase II. Several researchers showed that the EWMA-3 procedure outperforms other methods such as T^2 and EWMA/R for most of the shift magnitudes in each of the parameters (see Kim et al. (2003); Soleimani et al. (2009) for more details). In this method, the x' -values are coded such that the average coded value is zero. To do this, they are subtracted from their average, i.e., $x'' = x' - \bar{x'}$. Applying this method, the least-squares estimators of the intercept and slope will be independent and consequently, separate control charts can be used to monitor the three parameters of the model. The model after the transformation becomes

$$y'_{ij} = B_0 + B_1 x''_i + a_{ij}, \quad (6)$$

in which $B_0 = A'_0 + A'_1 \bar{x'}$, $B_1 = A'_1$, and $x''_i = (x'_i - \bar{x'})$.

For the EWMA control chart designed to monitor the intercept B_0 , the estimator of the intercept for the j th sample ($b_0(j)$) in the EWMA statistics is

$$\text{EWMA}_I(j) = \theta b_0(j) + (1 - \theta) \text{EWMA}_I(j - 1), \quad (7)$$

where $\theta(0 < \theta \leq 1)$ is the smoothing parameter and $\text{EWMA}_I(0) = B_0$. The lower and the upper control limits of this control chart are given in Eq. (8), where as long as the EWMA_I statistics are within them, the intercept of the profile is in statistical control.

$$\begin{aligned} \text{LCL}_I &= B_0 - L_I \sigma \sqrt{\theta / [(2 - \theta)(n - 1)]} \quad \text{and} \\ \text{UCL}_I &= B_0 + L_I \sigma \sqrt{\theta / [(2 - \theta)(n - 1)]}, \end{aligned} \quad (8)$$

in which $L_I (>0)$ is chosen to give a specified in-control ARL.

For the EWMA control chart designed to monitor the slope B_1 , the estimator of the slope for the j th sample ($b_1(j)$) in the EWMA statistics is

$$\text{EWMA}_S(j) = \theta b_1(j) + (1 - \theta) \text{EWMA}_S(j - 1), \quad (9)$$

where $\theta(0 < \theta \leq 1)$ is the smoothing parameter and $\text{EWMA}_S(0) = B_1$. The lower and the upper control limits of this control chart are given in Eq. (10) and as long as the EWMA_S statistics are within these control limits, the slope of the profile is in statistical control.

$$\begin{aligned} \text{LCL}_S &= B_1 - L_S \sigma \sqrt{\theta / \left[(2 - \theta) \sum_{i=2}^n x_i'^2 \right]} \quad \text{and} \\ \text{UCL}_S &= B_1 + L_S \sigma \sqrt{\theta / \left[(2 - \theta) \sum_{i=2}^n x_i'^2 \right]}, \end{aligned} \quad (10)$$

in which $L_S (>0)$ is chosen to give a specified in-control ARL.

The third EWMA control chart is used to monitor the error variance σ^2 . In this control chart, the estimator of the error variance based on residuals MSE_j , is used in the EWMA statistics as

$$\begin{aligned} \text{EWMA}_E(j) &= \max \{ \theta (\text{MSE}_j - 1) \\ &\quad + (1 - \theta) \text{EWMA}_E(j - 1), \ln \sigma^2 \}, \end{aligned} \quad (11)$$

where $\theta(0 < \theta \leq 1)$ is the smoothing parameter and $\text{EWMA}_E(0) = \ln \sigma^2$. The upper control limit of this control chart is given in Eq. (12).

$$\text{UCL}_E = L_E \sqrt{\theta \text{var}(\text{MSE}_j) / (2 - \theta)}, \quad (12)$$

in which $L_E (>0)$ is chosen to give a specified in-control ARL, and $\text{var}(\text{MSE}_j) = \frac{2\sigma^4}{n-1}$ [see Soleimani et al. (2009) for more details].

Process modeling and MLE derivation

As long as the statistics falls within the lower and upper control limits, the process is assumed in statistical control with known in-control parameters B_{00} , B_{10} , and σ_0^2 . Following an unknown point in time τ , a change occurs and process moves to an out-of-control state with unknown parameters B_{01} , B_{11} , and σ_1^2 . We assume that the change type is a step change and when this type of change occurs, the process remains at the new level until the special causes are identified and removed. Based on this model,

during the formation of the profiles $j = 1, 2, \dots, \tau$ the process is in control with known in-control parameters B_{00} , B_{10} , and σ_0^2 while, for profiles $j = \tau + 1, \tau + 2, \dots, T$ the parameters change to out-of-control values B_{01} , B_{11} , and σ_1^2 , where T indicates the signaling time. This model is used to derive the maximum likelihood estimator of the change point, denoted by $\hat{\tau}$.

Considering the change point to occur at τ , the likelihood function is given by

$$L(\tau, B_{01}, B_{11}, \sigma_1^2 | y) = \prod_{j=1}^{\tau} \prod_{i=1}^{n-1} \frac{1}{\sigma_0 \sqrt{2\pi}} e^{-\frac{(y'_{ij} - B_{00} - B_{10}x''_i)^2}{2\sigma_0^2}} \times \prod_{j=\tau+1}^T \prod_{i=1}^{n-1} \frac{1}{\sigma_1 \sqrt{2\pi}} e^{-\frac{(y'_{ij} - B_{01} - B_{11}x''_i)^2}{2\sigma_1^2}}. \quad (13)$$

The logarithm of the likelihood function in Eq. (13) is

$$\ln L(\tau, B_{01}, B_{11}, \sigma_1^2 | y) = -\frac{\tau(n-1)}{2} \ln(2\pi\sigma_0^2) - \frac{1}{2\sigma_0^2} \sum_{j=1}^{\tau} \sum_{i=1}^{n-1} (y'_{ij} - B_{00} - B_{10}x''_i)^2 - \frac{(T-\tau)(n-1)}{2} \ln(2\pi\sigma_1^2) - \frac{1}{2\sigma_1^2} \sum_{j=\tau+1}^T \sum_{i=1}^{n-1} (y'_{ij} - B_{01} - B_{11}x''_i)^2. \quad (14)$$

There are four unknown parameters τ , B_{01} , B_{11} , and σ_1^2 in the log-likelihood function in Eq. (14) that have to be estimated. At first, the maximum likelihood estimation of the parameters B_{01} , B_{11} , and σ_1^2 is obtained for all possible values of the change point in the range $0 \leq t < T$, by the following equations

$$\hat{B}_{11} = \frac{(S_{x''y'})_{t,T}}{(S_{x''x''})_{t,T}}, \quad \hat{B}_{01} = (\bar{y}'_{ij})_{t,T} - \hat{B}_{11}(\bar{x}'_{ij})_{t,T} \quad \text{and} \quad \hat{\sigma}_1^2 = \frac{\sum_{j=t+1}^T \sum_{i=1}^{n-1} (y'_{ij} - \hat{B}_{01} - \hat{B}_{11}x''_i)^2}{(T-t)(n-1)}, \quad (15)$$

where $(\cdot)_{t,T}$ is calculated based on the profiles t to T . Then, using the estimated parameters in Eq. (15), the MLE of the change point denoted by $\hat{\tau}$ is obtained as

$$\hat{\tau} = \arg \max \left\{ -\frac{t(n-1)}{2} \ln(2\pi\sigma_0^2) - \frac{1}{2\sigma_0^2} \sum_{j=1}^t \sum_{i=1}^{n-1} (y'_{ij} - B_{00} - B_{10}x''_i)^2 - \frac{(T-t)(n-1)}{2} \ln(2\pi\hat{\sigma}_1^2) - \frac{(T-t)(n-1)}{2} \right\}. \quad (16)$$

The estimated change point $\hat{\tau}$ is the point that maximizes Eq. (16) for values of $0 \leq t < T$.

The built-in change-point estimator of EWMA control chart suggested by Nishina (1992) is also employed in this research to evaluate the performance of the proposed change-point estimator. Nishina (1992) proposed an estimator to identify the change point in processes monitored by EWMA control charts, following a signal from the control chart. Since the process is monitored using three separate EWMA control charts, the Nishina's approach is applied to the control chart that issues an out-of-control signal. In this regard, if the EWMA_I control chart issues an out-of-control signal, the estimated change point, denoted by $\hat{\tau}_{EWMA}$, is

$$\hat{\tau}_{EWMA} = \begin{cases} \max\{j : EWMA_I(j) \leq B_{00}\} & \text{if } EWMA_I(T) > UCL_I \\ \max\{j : EWMA_I(j) \geq B_{00}\} & \text{if } EWMA_I(T) < LCL_I \end{cases} \quad (17)$$

In other words, if an increase in the intercept is investigated by the control chart, the change point is estimated using $\hat{\tau}_{EWMA} = \max\{j : EWMA_I(j) \leq B_{00}\}$, while if a decrease in the intercept is investigated, the change point is estimated by $\hat{\tau}_{EWMA} = \max\{j : EWMA_I(j) \geq B_{00}\}$. If the EWMA_S control chart issues an out-of-control signal, the change point is estimated by

$$\hat{\tau}_{EWMA} = \begin{cases} \max\{j : EWMA_S(j) \leq B_{10}\} & \text{if } EWMA_S(T) > UCL_S \\ \max\{j : EWMA_S(j) \geq B_{10}\} & \text{if } EWMA_S(T) < LCL_S \end{cases} \quad (18)$$

Finally, if the EWMA_E control chart issues an out-of-control signal, the estimated change point is obtained by

$$\hat{\tau}_{EWMA} = \max\{j : EWMA_E(j) \leq \ln \sigma_0^2\}. \quad (19)$$

In the next section, the performance of the proposed change-point estimator is compared to one of the above built-in EWMA estimator through some simulation experiments, where all programming tasks are performed using the MATLAB 7 software.

Performance evaluation

In this section, the performance of the proposed methods in estimating the time of a step change in the parameters of auto-correlated simple linear profiles is evaluated through some simulation experiments. In the simulation studies, the underlying model is considered as

$$y_{ij} = 3 + 2x_i + \varepsilon_{ij}, \quad \varepsilon_{ij} = \rho \varepsilon_{(i-1)j} + a_{ij}, \quad (20)$$

where a_{ij} 's are independent normal variables with mean zero and variance one, and the fixed x values are set equal



Table 1 Estimated change points and standard deviations of the two change-point estimators for a step shift in the intercept based on different auto-correlation coefficients

λ	$\varphi = 0.1$			$\varphi = 0.2$			$\varphi = 0.4$		
	$E(T)$	$E(\hat{\tau})$	$E(\hat{\tau}_{EWMA})$	$E(T)$	$E(\hat{\tau})$	$E(\hat{\tau}_{EWMA})$	$E(T)$	$E(\hat{\tau})$	$E(\hat{\tau}_{EWMA})$
0.2	136.06	86.39 (48.04)	121.31 (80.84)	152.08	98.44 (61.04)	138.47 (96.87)	183.53	133.23 (96.73)	170.39 (127.84)
0.4	76.23	57.40 (16.50)	58.24 (17.87)	81.71	59.66 (19.87)	63.66 (23.51)	106.27	71.54 (33.66)	89.84 (48.70)
0.6	62.12	52.45 (8.82)	48.88 (6.04)	64.86	53.26 (10.65)	50.09 (7.42)	76.09	56.88 (17.03)	57.73 (17.92)
0.8	57.45	50.81 (6.31)	47.74 (5.11)	58.96	51.48 (7.58)	48.37 (5.17)	65.14	53.41 (10.16)	50.08 (6.92)
1	55.26	50.30 (5.11)	47.24 (5.22)	56.24	50.44 (5.41)	47.16 (5.45)	59.64	51.95 (7.93)	48.23 (5.54)
1.2	54.09	50.12 (3.84)	47.16 (5.12)	54.74	50.30 (4.37)	47.19 (5.19)	57.24	50.66 (6.67)	47.68 (5.27)
1.4	53.35	50.09 (2.95)	47.01 (5.19)	53.91	49.90 (3.92)	46.96 (5.19)	55.74	50.27 (5.49)	47.44 (4.98)
1.6	52.82	50.02 (2.22)	46.94 (5.18)	53.29	50.28 (2.28)	47.07 (4.99)	54.78	50.03 (4.96)	47.31 (5.16)
1.8	52.46	50.05 (1.73)	46.93 (5.11)	52.89	50.20 (1.54)	47.29 (4.82)	54.12	50.07 (3.87)	46.86 (5.58)
2	52.16	50.04 (1.49)	46.93 (5.08)	52.48	50.02 (1.92)	47.03 (5.08)	53.63	50.15 (3.19)	47.06 (5.40)
λ	$\varphi = 0.5$			$\varphi = 0.7$			$\varphi = 0.9$		
	$E(T)$	$E(\hat{\tau})$	$E(\hat{\tau}_{EWMA})$	$E(T)$	$E(\hat{\tau})$	$E(\hat{\tau}_{EWMA})$	$E(T)$	$E(\hat{\tau})$	$E(\hat{\tau}_{EWMA})$
0.2	204.32	156.38 (112.73)	191.19 (141.79)	237.29	211.94 (163.83)	222.32 (168.95)	257.65	248.28 (193.88)	241.64 (186.42)
0.4	123.19	80.69 (46.72)	108.63 (75.06)	181.87	130.94 (93.05)	169.87 (127.39)	252.71	237.84 (186.45)	236.52 (184.91)
0.6	87.25	62.31 (21.80)	68.78 (30.12)	136.79	88.95 (53.58)	122.06 (82.12)	234.94	208.44 (165.67)	221.12 (174.52)
0.8	71.90	54.97 (14.32)	53.51 (12.51)	103.58	69.36 (32.05)	86.78 (46.82)	226.79	184.76 (140.21)	210.78 (160.74)
1	63.51	52.50 (10.93)	49.89 (6.68)	87.41	62.22 (22.27)	68.60 (29.45)	201.39	156.06 (116.50)	188.96 (142.45)
1.2	60.09	51.83 (8.01)	48.38 (5.70)	76.62	57.50 (16.08)	58.32 (17.53)	183.41	130.81 (91.63)	171.21 (127.83)
1.4	57.84	51.18 (7.10)	47.77 (4.80)	69.55	54.86 (13.21)	52.82 (11.17)	165.37	113.07 (77.10)	152.44 (107.13)
1.6	56.15	50.50 (5.68)	47.52 (5.21)	64.96	53.20 (10.73)	50.17 (7.60)	150.03	98.76 (63.76)	136.19 (94.64)
1.8	55.22	50.51 (4.51)	47.17 (5.69)	62.06	52.45 (9.04)	48.78 (5.87)	134.15	87.28 (51.30)	119.75 (76.83)
2	54.42	50.06 (4.62)	47.33 (4.80)	59.95	51.86 (8.27)	48.26 (5.65)	123.34	79.95 (42.47)	107.76 (67.96)

Standard deviations are shown in parentheses and $\tau = 50$

to 2, 4, 6, and 8. In the EWMA-3 control chart, the smoothing parameter is 0.2 and the values of the parameters (L_I, L_S, L_E) are set equal to (3.014, 3.012, 3.870), respectively, to obtain the overall in-control ARL of approximately 200 under $\varphi = 0.1$, $\varphi = 0.2$, $\varphi = 0.4$, $\varphi = 0.5$, $\varphi = 0.7$, and $\varphi = 0.9$ auto-correlation coefficient values.

Considering a change to occur at time $\tau = 50$, the observations for the first 50 profiles are randomly generated based on the in-control process given in Eq. (20) in which all parameters are known and in statistical control. However, following the 51st profile, observations are randomly generated from an out-of-control process with a step shift in the parameters as

$$\begin{aligned} A_{01} &= A_{00} + \lambda\sigma_0, \\ A_{11} &= A_{10} + \beta\sigma_0, \\ \sigma_1^2 &= \gamma\sigma_0^2. \end{aligned} \quad (21)$$

The transformations are used, and the corresponding statistic for each profile is calculated and plotted in the

EWMA-3 control chart. Following a genuine out-of-control signal, the change-point estimators in Eqs. (16–19) are applied to determine the time of the change. This procedure is replicated 10,000 times to obtain the averages, the standard deviations, and the precision performances of the estimated change point for all auto-correlation coefficients ($\varphi = 0.1$, $\varphi = 0.2$, $\varphi = 0.4$, $\varphi = 0.5$, $\varphi = 0.7$, and $\varphi = 0.9$) under investigation.

Table 1 contains the averages and standard deviations of the change-point estimates under a step shift in the intercept from A_{00} to $A_{01} = A_{00} + \lambda\sigma_0$ for both estimators under different auto-correlation coefficients. Based on the results in Table 1, while both estimators provide satisfactory results in terms of the expected length of a simulation run, $E(T) = \text{ARL} + 50$, the proposed MLE of the change point provides more accurate estimates than the built-in estimator of EWMA control chart, for almost all shift magnitudes and auto-correlation coefficients. Besides, the estimated change points for small shifts are closer to the real change point and that an increase in change-point

Table 2 Estimated precision performances of the two change-point estimators for a step shift in the intercept based on different auto-correlation coefficients

λ	$\varphi = 0.1$				$\varphi = 0.2$				$\varphi = 0.4$			
	P_0	P_1	P_3	P_5	P_0	P_1	P_3	P_5	P_0	P_1	P_3	P_5
0.2	0.011 (0.033)	0.034 (0.062)	0.082 (0.103)	0.127 (0.144)	0.006 (0.028)	0.023 (0.048)	0.057 (0.086)	0.093 (0.108)	0.008 (0.024)	0.024 (0.037)	0.052 (0.071)	0.080 (0.090)
0.4	0.074 (0.209)	0.170 (0.334)	0.302 (0.481)	0.402 (0.574)	0.053 (0.158)	0.130 (0.251)	0.245 (0.381)	0.346 (0.468)	0.030 (0.076)	0.077 (0.129)	0.154 (0.201)	0.232 (0.250)
0.6	0.159 (0.353)	0.306 (0.537)	0.489 (0.714)	0.619 (0.806)	0.111 (0.314)	0.247 (0.510)	0.407 (0.690)	0.533 (0.773)	0.076 (0.213)	0.171 (0.342)	0.307 (0.500)	0.403 (0.599)
0.8	0.241 (0.427)	0.430 (0.599)	0.640 (0.756)	0.777 (0.835)	0.213 (0.421)	0.391 (0.595)	0.599 (0.755)	0.721 (0.826)	0.125 (0.306)	0.249 (0.474)	0.424 (0.661)	0.566 (0.768)
1	0.331 (0.456)	0.546 (0.603)	0.772 (0.740)	0.892 (0.815)	0.276 (0.420)	0.463 (0.569)	0.697 (0.712)	0.828 (0.805)	0.164 (0.398)	0.326 (0.565)	0.533 (0.750)	0.682 (0.831)
1.2	0.437 (0.483)	0.658 (0.609)	0.876 (0.737)	0.954 (0.814)	0.382 (0.474)	0.598 (0.627)	0.823 (0.744)	0.918 (0.810)	0.278 (0.443)	0.458 (0.596)	0.653 (0.745)	0.787 (0.831)
1.4	0.520 (0.486)	0.750 (0.604)	0.933 (0.730)	0.976 (0.805)	0.471 (0.476)	0.667 (0.586)	0.883 (0.715)	0.946 (0.802)	0.309 (0.462)	0.517 (0.619)	0.742 (0.745)	0.856 (0.822)
1.6	0.612 (0.481)	0.828 (0.591)	0.968 (0.719)	0.985 (0.799)	0.526 (0.480)	0.764 (0.612)	0.952 (0.734)	0.987 (0.806)	0.368 (0.460)	0.582 (0.618)	0.807 (0.752)	0.919 (0.822)
1.8	0.689 (0.478)	0.883 (0.591)	0.981 (0.714)	0.990 (0.799)	0.629 (0.505)	0.820 (0.616)	0.961 (0.740)	0.990 (0.832)	0.417 (0.472)	0.648 (0.590)	0.853 (0.711)	0.935 (0.793)
2	0.736 (0.478)	0.922 (0.588)	0.987 (0.717)	0.994 (0.801)	0.676 (0.498)	0.878 (0.604)	0.980 (0.734)	0.990 (0.813)	0.529 (0.498)	0.728 (0.615)	0.914 (0.740)	0.975 (0.810)
λ	$\varphi = 0.5$				$\varphi = 0.7$				$\varphi = 0.9$			
	P_0	P_1	P_3	P_5	P_0	P_1	P_3	P_5	P_0	P_1	P_3	P_5
0.2	0.006 (0.018)	0.023 (0.036)	0.041 (0.059)	0.055 (0.074)	0.005 (0.013)	0.012 (0.030)	0.026 (0.043)	0.041 (0.055)	0.003 (0.011)	0.009 (0.025)	0.020 (0.038)	0.031 (0.051)
0.4	0.024 (0.053)	0.053 (0.096)	0.112 (0.141)	0.177 (0.184)	0.010 (0.023)	0.025 (0.040)	0.059 (0.068)	0.078 (0.087)	0.003 (0.010)	0.009 (0.023)	0.019 (0.043)	0.032 (0.053)
0.6	0.059 (0.145)	0.134 (0.241)	0.218 (0.352)	0.322 (0.432)	0.019 (0.040)	0.050 (0.072)	0.105 (0.120)	0.150 (0.156)	0.004 (0.012)	0.007 (0.024)	0.019 (0.041)	0.034 (0.056)
0.8	0.096 (0.255)	0.192 (0.383)	0.342 (0.546)	0.469 (0.648)	0.034 (0.077)	0.082 (0.137)	0.164 (0.215)	0.237 (0.273)	0.006 (0.012)	0.013 (0.025)	0.028 (0.039)	0.047 (0.057)
1	0.134 (0.330)	0.271 (0.514)	0.456 (0.683)	0.570 (0.778)	0.055 (0.140)	0.130 (0.226)	0.233 (0.340)	0.318 (0.414)	0.007 (0.016)	0.0183 (0.027)	0.035 (0.048)	0.051 (0.063)
1.2	0.190 (0.387)	0.338 (0.568)	0.540 (0.745)	0.673 (0.813)	0.071 (0.201)	0.158 (0.316)	0.297 (0.468)	0.400 (0.558)	0.012 (0.026)	0.029 (0.042)	0.055 (0.066)	0.085 (0.091)
1.4	0.213 (0.417)	0.388 (0.588)	0.599 (0.751)	0.753 (0.833)	0.096 (0.263)	0.203 (0.413)	0.348 (0.589)	0.471 (0.691)	0.010 (0.023)	0.024 (0.043)	0.059 (0.073)	0.088 (0.097)
1.6	0.285 (0.438)	0.491 (0.612)	0.731 (0.766)	0.854 (0.839)	0.129 (0.319)	0.262 (0.494)	0.433 (0.674)	0.557 (0.762)	0.015 (0.031)	0.041 (0.059)	0.080 (0.094)	0.118 (0.119)
1.8	0.328 (0.467)	0.543 (0.620)	0.786 (0.740)	0.910 (0.817)	0.144 (0.359)	0.297 (0.531)	0.478 (0.713)	0.608 (0.810)	0.015 (0.031)	0.044 (0.068)	0.100 (0.109)	0.147 (0.146)
2	0.405 (0.491)	0.594 (0.617)	0.832 (0.743)	0.930 (0.821)	0.185 (0.381)	0.338 (0.562)	0.533 (0.734)	0.668 (0.825)	0.022 (0.051)	0.067 (0.087)	0.132 (0.144)	0.178 (0.180)

Precision performances for $\hat{\tau}_{EWMA}$ are shown in parentheses

estimates for larger auto-correlation coefficients results in an increase in the average run length (ARL). In other words, as auto-correlation coefficient gets larger the ARL and hence the expected length of run increases and consequently larger estimates of change point are obtained.

Moreover, the precision performances are reported in Table 2 for a step shift in the intercept, in which the probabilities $P(|\hat{\tau} - \tau| = 0)$, $P(|\hat{\tau} - \tau| \leq 1)$, $P(|\hat{\tau} - \tau| \leq 3)$, and $P(|\hat{\tau} - \tau| \leq 5)$ are denoted by P_0 , P_1 , P_3 , and P_5 , respectively. The results in Table 2 show that while $\hat{\tau}_{EWMA}$



Table 3 Estimated change points and standard deviations of the two change-point estimators for a step shift in the slope based on different auto-correlation coefficients

β	$\varphi = 0.1$			$\varphi = 0.2$			$\varphi = 0.4$		
	$E(T)$	$E(\hat{\tau})$	$E(\hat{\tau}_{EWMA})$	$E(T)$	$E(\hat{\tau})$	$E(\hat{\tau}_{EWMA})$	$E(T)$	$E(\hat{\tau})$	$E(\hat{\tau}_{EWMA})$
0.025	158.12	106.09 (67.43)	145.10 (98.58)	170.54	122.33 (85.77)	158.07 (111.36)	195.10	141.27 (99.01)	182.57 (136.83)
0.05	90.23	62.37 (23.12)	73.40 (32.91)	95.81	66.16 (27.71)	78.54 (38.62)	110.37	76.06 (37.33)	94.63 (51.68)
0.075	68.23	54.72 (12.08)	52.48 (9.90)	71.60	55.87 (14.32)	54.37 (12.89)	81.44	58.18 (17.33)	63.25 (24.36)
0.1	61.29	52.14 (8.74)	48.67 (5.25)	62.62	52.73 (9.24)	49.19 (5.63)	67.47	55.13 (11.18)	51.87 (9.42)
0.125	57.74	50.64 (6.85)	47.92 (4.97)	58.67	51.04 (7.34)	47.84 (5.35)	61.10	52.68 (8.04)	49.03 (5.54)
0.15	55.88	50.69 (4.57)	47.45 (4.98)	56.42	50.57 (5.51)	47.57 (5.04)	58.50	51.31 (7.01)	48.13 (4.93)
0.175	54.77	50.32 (4.58)	47.08 (4.98)	55.12	50.54 (4.33)	47.04 (5.54)	56.59	50.90 (4.95)	47.57 (5.21)
0.2	53.86	50.18 (3.52)	47.15 (4.95)	54.28	50.03 (4.90)	47.06 (5.22)	55.44	50.29 (5.11)	47.33 (5.43)
0.225	53.32	50.09 (2.99)	47.01 (5.61)	53.61	50.03 (3.51)	47.20 (4.79)	54.54	50.16 (4.57)	47.12 (5.13)
0.25	52.87	50.15 (1.53)	46.59 (5.98)	53.22	50.15 (2.45)	47.08 (4.77)	53.97	50.13 (3.12)	47.02 (5.09)
β	$\varphi = 0.5$			$\varphi = 0.7$			$\varphi = 0.9$		
	$E(T)$	$E(\hat{\tau})$	$E(\hat{\tau}_{EWMA})$	$E(T)$	$E(\hat{\tau})$	$E(\hat{\tau}_{EWMA})$	$E(T)$	$E(\hat{\tau})$	$E(\hat{\tau}_{EWMA})$
0.025	193.11	151.84 (108.63)	179.91 (132.38)	219.58	184.72 (142.62)	206.94 (159.16)	238.15	215.30 (167.65)	224.46 (173.77)
0.05	122.78	79.54 (42.58)	107.91 (66.56)	149.90	99.21 (64.09)	136.12 (95.75)	180.95	131.99 (91.66)	168.69 (123.21)
0.075	86.28	61.35 (21.34)	67.80 (27.80)	105.18	70.26 (32.69)	88.53 (47.66)	134.38	88.43 (52.83)	119.83 (79.74)
0.1	70.75	56.79 (13.19)	53.83 (11.68)	82.29	59.08 (19.78)	64.19 (25.82)	105.14	70.07 (31.48)	87.93 (48.39)
0.125	63.68	52.89 (9.81)	49.73 (7.24)	71.80	55.65 (14.25)	54.62 (13.39)	87.71	61.13 (21.96)	69.53 (31.17)
0.15	59.84	51.09 (8.15)	48.41 (5.40)	65.23	53.45 (10.51)	50.11 (7.79)	76.79	57.78 (16.62)	58.41 (18.07)
0.175	57.76	51.07 (6.25)	47.79 (5.15)	61.20	52.36 (8.49)	48.85 (5.71)	69.47	55.08 (12.90)	52.92 (11.47)
0.2	56.19	50.68 (5.10)	47.36 (4.97)	58.93	51.41 (7.32)	48.01 (5.34)	65.14	53.27 (10.96)	50.35 (7.78)
0.225	55.26	50.18 (5.10)	47.35 (5.02)	57.42	50.85 (6.53)	47.53 (5.36)	62.01	52.31 (9.16)	48.80 (6.17)
0.25	54.60	50.11 (4.79)	47.20 (5.50)	56.18	50.61 (5.58)	47.59 (4.90)	59.98	51.58 (8.26)	48.21 (5.81)

Standard deviations are shown in parentheses and $\tau = 50$

provides more precise estimates in comparison to $\hat{\tau}$ for small shifts, as the shift magnitudes increase the precision performance of $\hat{\tau}$ increases and $\hat{\tau}$ outperforms $\hat{\tau}_{EWMA}$.

The results of averages, standard deviations, and precision performances of the estimated change points under a step shift in the slope parameter from A_{10} to $A_{11} = A_{10} + \beta\sigma_0$ are summarized in Tables 3 and 4. Based on the results in Table 3, the proposed MLE of the change point provides adequately accurate estimates for almost all shift values and auto-correlation coefficients. In fact, in addition to better results of $\hat{\tau}$ in comparison to $E(T)$, it provides more accurate results than $\hat{\tau}_{EWMA}$. Moreover, the results in Table 4 show better precision for $\hat{\tau}_{EWMA}$ for small shift values and better precision for $\hat{\tau}$ as shift values increase.

Finally, Tables 5 and 6 contain the averages, the standard deviations, and the precision performances of the change-point estimates under a step shift in the error variance from σ_0^2 to $\sigma_1^2 = \gamma\sigma_0^2$. Again, the results show that the proposed change-point estimator $\hat{\tau}$ provides more accurate estimates compared to $\hat{\tau}_{EWMA}$ for shifts of almost any

magnitude and all auto-correlation coefficients. Furthermore, $\hat{\tau}$ provides more precise results than $\hat{\tau}_{EWMA}$ especially for large shift values.

In summary, the proposed MLE of a step change in the parameters of an auto-correlated simple linear profile provides adequately accurate and precise estimates of the change point, regardless of shift magnitude and auto-correlation coefficient. In addition, the results obtained from simulation experiments indicate that $\hat{\tau}$ outperforms $\hat{\tau}_{EWMA}$ for almost all shift values where in most cases, $\hat{\tau}_{EWMA}$ underestimates the real change point.

Cardinality and coverage performances of the confidence set estimator

In this section, the cardinality and coverage performance of the confidence set estimator for the process change point are evaluated. Confidence sets for the change point provide a window of the possible change points that cover the true change point of the process. Consequently, process

Table 4 Estimated precision performances of the two change-point estimators for a step shift in the slope based on different auto-correlation coefficients

β	$\varphi = 0.1$				$\varphi = 0.2$				$\varphi = 0.4$			
	P0	P1	P3	P5	P0	P1	P3	P5	P0	P1	P3	P5
0.025	0.009 (0.019)	0.025 (0.046)	0.061 (0.074)	0.100 (0.100)	0.012 (0.025)	0.029 (0.040)	0.060 (0.076)	0.094 (0.105)	0.004 (0.018)	0.017 (0.039)	0.048 (0.057)	0.081 (0.072)
0.05	0.057 (0.120)	0.106 (0.194)	0.211 (0.294)	0.306 (0.363)	0.041 (0.106)	0.112 (0.192)	0.200 (0.282)	0.278 (0.337)	0.027 (0.046)	0.076 (0.089)	0.153 (0.153)	0.203 (0.213)
0.075	0.110 (0.267)	0.229 (0.403)	0.370 (0.601)	0.480 (0.692)	0.076 (0.222)	0.180 (0.366)	0.332 (0.530)	0.452 (0.628)	0.061 (0.157)	0.143 (0.253)	0.256 (0.395)	0.366 (0.474)
0.1	0.162 (0.368)	0.334 (0.556)	0.514 (0.733)	0.628 (0.827)	0.158 (0.359)	0.294 (0.520)	0.499 (0.722)	0.620 (0.808)	0.114 (0.296)	0.244 (0.450)	0.391 (0.637)	0.510 (0.729)
0.125	0.238 (0.429)	0.426 (0.612)	0.638 (0.753)	0.768 (0.834)	0.214 (0.391)	0.407 (0.592)	0.614 (0.742)	0.745 (0.808)	0.178 (0.361)	0.326 (0.553)	0.512 (0.721)	0.639 (0.810)
0.15	0.293 (0.457)	0.499 (0.609)	0.747 (0.743)	0.869 (0.817)	0.300 (0.414)	0.515 (0.590)	0.715 (0.734)	0.838 (0.823)	0.240 (0.421)	0.402 (0.600)	0.606 (0.760)	0.752 (0.837)
0.175	0.372 (0.436)	0.595 (0.572)	0.813 (0.730)	0.924 (0.810)	0.351 (0.463)	0.569 (0.595)	0.794 (0.736)	0.907 (0.807)	0.284 (0.450)	0.491 (0.605)	0.706 (0.736)	0.828 (0.833)
0.2	0.473 (0.489)	0.705 (0.613)	0.895 (0.739)	0.967 (0.814)	0.433 (0.452)	0.656 (0.601)	0.857 (0.727)	0.940 (0.806)	0.320 (0.474)	0.539 (0.613)	0.786 (0.744)	0.889 (0.821)
0.225	0.544 (0.478)	0.779 (0.611)	0.942 (0.746)	0.977 (0.815)	0.505 (0.483)	0.736 (0.591)	0.927 (0.737)	0.973 (0.804)	0.387 (0.481)	0.623 (0.602)	0.844 (0.725)	0.944 (0.804)
0.25	0.609 (0.466)	0.825 (0.581)	0.968 (0.709)	0.985 (0.791)	0.568 (0.480)	0.781 (0.604)	0.945 (0.719)	0.981 (0.804)	0.459 (0.442)	0.676 (0.578)	0.893 (0.719)	0.957 (0.801)
β	$\varphi = 0.5$				$\varphi = 0.7$				$\varphi = 0.9$			
	P0	P1	P3	P5	P0	P1	P3	P5	P0	P1	P3	P5
0.025	0.013 (0.025)	0.028 (0.043)	0.050 (0.059)	0.074 (0.079)	0.006 (0.017)	0.013 (0.027)	0.033 (0.046)	0.052 (0.067)	0.003 (0.011)	0.009 (0.023)	0.022 (0.036)	0.032 (0.051)
0.05	0.028 (0.052)	0.054 (0.086)	0.127 (0.138)	0.184 (0.168)	0.016 (0.030)	0.040 (0.055)	0.082 (0.092)	0.122 (0.121)	0.009 (0.021)	0.023 (0.041)	0.052 (0.067)	0.075 (0.086)
0.075	0.065 (0.129)	0.130 (0.211)	0.229 (0.314)	0.327 (0.397)	0.043 (0.078)	0.091 (0.133)	0.159 (0.206)	0.231 (0.258)	0.025 (0.046)	0.053 (0.075)	0.108 (0.122)	0.149 (0.152)
0.1	0.107 (0.240)	0.220 (0.380)	0.346 (0.555)	0.471 (0.643)	0.062 (0.150)	0.137 (0.259)	0.258 (0.394)	0.354 (0.478)	0.037 (0.084)	0.089 (0.138)	0.168 (0.211)	0.246 (0.265)
0.125	0.142 (0.323)	0.270 (0.483)	0.443 (0.675)	0.566 (0.774)	0.096 (0.229)	0.194 (0.378)	0.341 (0.547)	0.450 (0.648)	0.054 (0.144)	0.128 (0.237)	0.235 (0.344)	0.317 (0.423)
0.15	0.198 (0.399)	0.347 (0.578)	0.542 (0.731)	0.693 (0.817)	0.119 (0.322)	0.255 (0.492)	0.422 (0.667)	0.541 (0.759)	0.074 (0.208)	0.160 (0.331)	0.290 (0.475)	0.385 (0.568)
0.175	0.237 (0.410)	0.428 (0.576)	0.643 (0.740)	0.778 (0.826)	0.157 (0.352)	0.311 (0.531)	0.500 (0.722)	0.633 (0.813)	0.113 (0.283)	0.224 (0.428)	0.369 (0.598)	0.476 (0.700)
0.2	0.292 (0.456)	0.509 (0.609)	0.717 (0.724)	0.854 (0.818)	0.205 (0.425)	0.386 (0.592)	0.588 (0.750)	0.724 (0.817)	0.120 (0.308)	0.249 (0.484)	0.417 (0.671)	0.534 (0.772)
0.225	0.347 (0.457)	0.548 (0.622)	0.785 (0.753)	0.895 (0.824)	0.238 (0.413)	0.430 (0.582)	0.643 (0.736)	0.776 (0.814)	0.149 (0.350)	0.290 (0.525)	0.485 (0.710)	0.610 (0.803)
0.25	0.418 (0.462)	0.655 (0.631)	0.848 (0.751)	0.931 (0.815)	0.288 (0.448)	0.494 (0.613)	0.720 (0.753)	0.848 (0.824)	0.186 (0.385)	0.337 (0.565)	0.542 (0.735)	0.682 (0.821)

Precision performances for $\hat{\tau}_{EWMA}$ are shown in parentheses

engineers can identify the true change point more quickly. According to Box and Cox (1964), the confidence set of the change point estimates are obtained as

$$CS = \{t : \ln L(t) > \ln L(\hat{\tau}) - D\}, \quad (22)$$

in which $\ln L(\hat{\tau})$ represents the maximum of the log-likelihood function for all values of $0 \leq t < T$. Based on Eq. (22), t is included in the confidence set if the value of the log-likelihood function at t is greater than the



Table 5 Estimated change points and standard deviations of the two change-point estimators for a step shift in the error variance based on different auto-correlation coefficients

γ	$\varphi = 0.1$			$\varphi = 0.2$			$\varphi = 0.4$		
	$E(T)$	$E(\hat{\tau})$	$E(\hat{\tau}_{EWMA})$	$E(T)$	$E(\hat{\tau})$	$E(\hat{\tau}_{EWMA})$	$E(T)$	$E(\hat{\tau})$	$E(\hat{\tau}_{EWMA})$
1.2	79.38	66.05 (22.66)	68.04 (25.73)	78.19	65.31 (22.01)	66.95 (24.36)	79.78	66.41 (24.16)	68.75 (26.17)
1.4	60.16	53.57 (9.18)	51.22 (6.79)	60.49	53.61 (10.64)	50.99 (7.84)	60.09	53.40 (9.54)	50.85 (7.18)
1.6	55.83	51.63 (5.76)	48.53 (5.27)	55.87	50.71 (7.83)	48.39 (5.48)	55.84	50.97 (7.03)	48.54 (5.07)
1.8	53.98	50.68 (4.39)	47.53 (5.14)	54.15	50.96 (3.86)	48.13 (4.82)	53.94	50.34 (5.61)	47.78 (4.90)
2	53.24	50.32 (4.59)	47.41 (5.01)	53.09	50.41 (3.18)	47.58 (4.39)	52.93	50.33 (3.59)	47.29 (4.73)
2.2	52.49	50.14 (3.44)	47.03 (5.02)	52.47	50.27 (2.98)	47.23 (5.02)	52.58	50.27 (3.16)	47.13 (4.89)
2.4	52.14	50.12 (3.10)	47.20 (4.71)	52.16	50.17 (2.63)	47.09 (5.05)	52.09	50.12 (2.70)	47.01 (5.16)
2.6	51.97	50.09 (2.85)	47.06 (4.90)	51.95	50.08 (2.71)	47.22 (4.43)	51.93	50.06 (2.99)	47.14 (4.76)
2.8	51.73	49.99 (2.56)	46.89 (5.41)	51.75	50.01 (2.63)	47.09 (4.98)	51.79	50.05 (1.97)	46.88 (5.15)
3	51.65	50.09 (2.16)	46.95 (5.04)	51.62	49.98 (1.80)	47.06 (5.08)	51.64	50.04 (2.06)	47.12 (4.72)
γ	$\varphi = 0.5$			$\varphi = 0.7$			$\varphi = 0.9$		
	$E(T)$	$E(\hat{\tau})$	$E(\hat{\tau}_{EWMA})$	$E(T)$	$E(\hat{\tau})$	$E(\hat{\tau}_{EWMA})$	$E(T)$	$E(\hat{\tau})$	$E(\hat{\tau}_{EWMA})$
1.2	79.06	65.87 (23.70)	67.52 (24.97)	79.55	65.64 (23.68)	68.47 (26.10)	79.21	65.34 (22.31)	68.35 (24.89)
1.4	60.54	53.28 (9.84)	51.05 (7.68)	60.18	53.65 (9.30)	50.87 (7.42)	60.15	53.44 (9.18)	51.14 (7.24)
1.6	55.62	51.26 (6.29)	48.56 (5.14)	55.65	51.14 (6.14)	48.53 (5.09)	55.76	51.49 (6.10)	48.59 (5.09)
1.8	54.02	50.73 (4.92)	47.97 (4.59)	54.01	50.58 (4.70)	47.84 (4.82)	54.05	50.69 (4.89)	47.86 (4.81)
2	53.13	50.50 (3.51)	47.67 (4.75)	53.11	50.31 (4.08)	47.52 (4.77)	53.04	50.36 (6.64)	47.48 (4.72)
2.2	52.54	50.17 (3.62)	47.21 (4.72)	52.56	50.18 (3.49)	47.18 (4.88)	52.54	50.23 (3.08)	47.11 (5.08)
2.4	52.16	50.09 (2.98)	46.98 (5.04)	52.19	50.07 (3.29)	47.16 (4.84)	52.19	50.14 (2.78)	47.28 (4.76)
2.6	51.99	50.05 (2.87)	47.12 (4.94)	51.98	50.11 (2.43)	46.96 (5.11)	51.93	50.03 (2.78)	46.98 (5.07)
2.8	51.77	50.09 (1.99)	46.96 (5.04)	51.76	50.03 (2.63)	46.96 (4.99)	51.74	49.99 (2.43)	46.81 (5.18)
3	51.61	49.94 (2.46)	46.84 (5.42)	51.62	50.01 (2.13)	46.97 (4.95)	51.61	50.08 (1.51)	47.09 (4.69)

Standard deviations are shown in parentheses and $\tau = 50$

maximum of the log-likelihood function minus a reference value D . In this paper, the cardinality and coverage percent of the confidence set estimator is calculated for different reference values of $D = 1$, $D = 3$, and $D = 5$. The results for a step shift in the intercept of the profile are reported in Table 7.

Based on the results in Table 7, for reference value of $D = 3$ and shift of size $\lambda = 1.2$, for example, the confidence set estimator provides an expected cardinality of 9.617 and coverage rate of 0.9994; that is, the confidence set contains the true change point with high probability of 0.9994.

An illustrative example

The application of the proposed approach is demonstrated in this section using a numerical example. Consider an in-control model as

$$\begin{aligned} y_{ij} &= 3 + 2x_i + \varepsilon_{ij}, \\ \varepsilon_{ij} &= 0.25\varepsilon_{(i-1)j} + a_{ij}, \end{aligned} \quad (23)$$

where a_{ij} 's are independent normal variables with mean zero and variance one, and the fixed x values are set equal to 2, 4, 6, and 8. Moreover, the smoothing parameter is set equal to 0.2 and the values of the parameters (L_I, L_S, L_E) are set equal to (3.014, 3.012, 3.870) to obtain the overall in-control ARL of 200.

Considering the change to occur at 20th profile, the first 20 profiles come from the in-control process and thereafter, a shift of size $\lambda = 1$ is induced in the intercept of the model. The values of the statistics in Eqs. (7), (9), and (11) are calculated and plotted on the control charts until a signal is issued at profile 24 by the EWMA_I control chart. At this time, the two methods are employed to estimate the change point. Figure 1 shows the EWMA_I statistics plotted on the control chart in which a signal is generated at profile 24.

Based on the results in Fig. 1, the MLE of the change point is obtained at $t = 20$ while the EWMA built-in estimator of change point is obtained at $t = 17$. Consequently, $\hat{\tau} = 20$ is the estimated change point of the process obtained from the proposed change-point

Table 6 Estimated precision performances of the two change-point estimators for a step shift in the error variance and for different auto-correlation coefficients

γ	$\varphi = 0.1$				$\varphi = 0.2$				$\varphi = 0.4$			
	P_0	P_1	P_3	P_5	P_0	P_1	P_3	P_5	P_0	P_1	P_3	P_5
1.2	0.034 (0.080)	0.100 (0.181)	0.200 (0.300)	0.285 (0.376)	0.044 (0.072)	0.095 (0.170)	0.203 (0.302)	0.277 (0.388)	0.041 (0.075)	0.094 (0.168)	0.194 (0.284)	0.279 (0.371)
1.4	0.143 (0.203)	0.260 (0.411)	0.453 (0.623)	0.605 (0.738)	0.108 (0.183)	0.237 (0.412)	0.443 (0.616)	0.586 (0.734)	0.111 (0.176)	0.247 (0.410)	0.448 (0.618)	0.605 (0.728)
1.6	0.242 (0.273)	0.428 (0.532)	0.654 (0.714)	0.789 (0.810)	0.208 (0.232)	0.381 (0.514)	0.624 (0.733)	0.769 (0.829)	0.219 (0.261)	0.402 (0.510)	0.638 (0.719)	0.769 (0.819)
1.8	0.306 (0.279)	0.566 (0.518)	0.804 (0.716)	0.900 (0.803)	0.306 (0.310)	0.559 (0.554)	0.791 (0.747)	0.896 (0.829)	0.323 (0.319)	0.567 (0.562)	0.790 (0.741)	0.885 (0.836)
2	0.424 (0.332)	0.647 (0.548)	0.863 (0.710)	0.931 (0.802)	0.402 (0.335)	0.674 (0.556)	0.881 (0.724)	0.947 (0.814)	0.396 (0.301)	0.640 (0.517)	0.884 (0.703)	0.953 (0.795)
2.2	0.485 (0.355)	0.746 (0.537)	0.914 (0.703)	0.973 (0.794)	0.472 (0.318)	0.752 (0.549)	0.933 (0.724)	0.974 (0.809)	0.462 (0.322)	0.736 (0.537)	0.907 (0.691)	0.969 (0.792)
2.4	0.534 (0.350)	0.802 (0.550)	0.950 (0.715)	0.978 (0.798)	0.520 (0.343)	0.793 (0.541)	0.946 (0.721)	0.978 (0.800)	0.571 (0.372)	0.802 (0.564)	0.956 (0.723)	0.973 (0.799)
2.6	0.586 (0.365)	0.837 (0.534)	0.964 (0.703)	0.984 (0.805)	0.588 (0.355)	0.841 (0.544)	0.964 (0.718)	0.983 (0.796)	0.626 (0.374)	0.850 (0.546)	0.960 (0.721)	0.984 (0.805)
2.8	0.665 (0.386)	0.857 (0.554)	0.974 (0.709)	0.985 (0.798)	0.630 (0.370)	0.867 (0.569)	0.971 (0.717)	0.987 (0.811)	0.626 (0.352)	0.861 (0.547)	0.971 (0.706)	0.982 (0.802)
3	0.674 (0.356)	0.902 (0.552)	0.982 (0.717)	0.992 (0.792)	0.709 (0.393)	0.896 (0.564)	0.973 (0.735)	0.985 (0.804)	0.689 (0.377)	0.886 (0.575)	0.978 (0.720)	0.991 (0.808)
γ	$\varphi = 0.$				$\varphi = 0.7$				$\varphi = 0.9$			
	P_0	P_1	P_3	P_5	P_0	P_1	P_3	P_5	P_0	P_1	P_3	P_5
1.2	0.038 (0.079)	0.093 (0.172)	0.169 (0.282)	0.263 (0.355)	0.042 (0.077)	0.100 (0.178)	0.197 (0.294)	0.276 (0.368)	0.040 (0.079)	0.098 (0.171)	0.194 (0.294)	0.276 (0.368)
1.4	0.117 (0.197)	0.263 (0.410)	0.451 (0.627)	0.581 (0.742)	0.134 (0.199)	0.266 (0.410)	0.444 (0.625)	0.584 (0.741)	0.135 (0.193)	0.266 (0.406)	0.468 (0.616)	0.606 (0.743)
1.6	0.221 (0.292)	0.426 (0.504)	0.684 (0.725)	0.813 (0.820)	0.228 (0.261)	0.418 (0.516)	0.670 (0.719)	0.812 (0.819)	0.227 (0.275)	0.415 (0.511)	0.647 (0.721)	0.783 (0.825)
1.8	0.310 (0.304)	0.530 (0.538)	0.785 (0.737)	0.904 (0.833)	0.314 (0.312)	0.562 (0.547)	0.803 (0.732)	0.902 (0.823)	0.337 (0.294)	0.564 (0.543)	0.789 (0.735)	0.894 (0.830)
2	0.391 (0.331)	0.652 (0.564)	0.888 (0.729)	0.949 (0.815)	0.407 (0.327)	0.651 (0.560)	0.879 (0.732)	0.944 (0.821)	0.415 (0.336)	0.669 (0.555)	0.885 (0.721)	0.952 (0.815)
2.2	0.483 (0.337)	0.746 (0.553)	0.921 (0.707)	0.963 (0.794)	0.474 (0.341)	0.734 (0.541)	0.921 (0.709)	0.967 (0.798)	0.428 (0.338)	0.733 (0.538)	0.915 (0.713)	0.968 (0.798)
2.4	0.562 (0.351)	0.801 (0.528)	0.946 (0.698)	0.969 (0.797)	0.544 (0.360)	0.794 (0.553)	0.949 (0.710)	0.977 (0.808)	0.557 (0.362)	0.799 (0.559)	0.944 (0.723)	0.979 (0.810)
2.6	0.586 (0.358)	0.828 (0.550)	0.964 (0.722)	0.986 (0.808)	0.600 (0.359)	0.836 (0.542)	0.958 (0.702)	0.984 (0.796)	0.613 (0.350)	0.843 (0.542)	0.958 (0.703)	0.983 (0.801)
2.8	0.639 (0.359)	0.895 (0.551)	0.978 (0.706)	0.991 (0.795)	0.647 (0.375)	0.881 (0.546)	0.975 (0.696)	0.989 (0.793)	0.654 (0.364)	0.882 (0.547)	0.971 (0.697)	0.983 (0.789)
3	0.731 (0.381)	0.908 (0.565)	0.973 (0.708)	0.985 (0.795)	0.690 (0.375)	0.898 (0.547)	0.981 (0.714)	0.990 (0.802)	0.704 (0.376)	0.898 (0.551)	0.981 (0.715)	0.992 (0.804)

Precision performances for $\hat{\tau}_{EWMA}$ are shown in parentheses

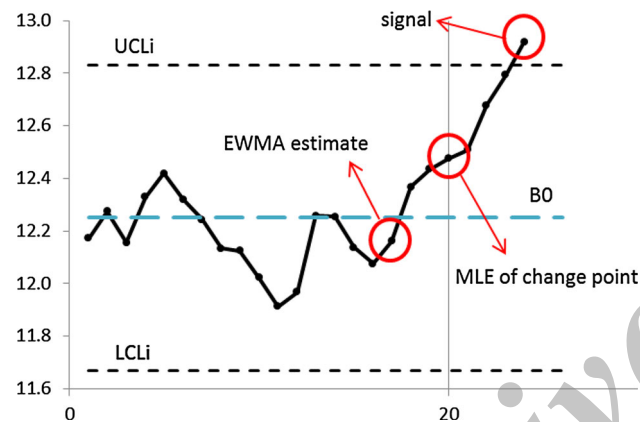
estimator while $\hat{\tau}_{EWMA} = 17$ is the estimated change point obtained from the built-in estimator of EWMA control chart. As a result, applying the proposed method, process

engineers can search around the estimated change-point and find the root causes of process variation in a quick manner.



Table 7 Cardinality and coverage probabilities for different reference values under shift in the intercept

λ	Cardinality			Coverage		
	$D = 1$	$D = 3$	$D = 5$	$D = 1$	$D = 3$	$D = 5$
0.2	8.101	43.347	96.417	0.6207	0.7870	0.9036
0.4	6.138	30.990	62.272	0.6960	0.9036	0.9792
0.6	4.254	20.841	41.967	0.7443	0.9614	0.9946
0.8	3.417	15.115	31.966	0.8103	0.9910	0.9994
1	2.909	11.952	27.114	0.8403	0.9968	0.9996
1.2	2.579	9.617	22.879	0.9453	0.9994	1.0000
1.4	2.256	8.007	19.847	0.9882	0.9996	1.0000
1.6	2.034	6.838	16.523	0.9930	1.0000	1.0000
1.8	1.819	5.718	13.886	0.9922	1.0000	1.0000
2	1.702	4.944	11.563	0.9990	1.0000	1.0000

**Fig. 1** The $EWMA_1$ control chart with a shift in the intercept and the estimate of change point using both methods

Conclusions

In this paper, a maximum likelihood estimator of a step change in the parameters of auto-correlated simple linear profiles was derived, in which the auto-correlation structure between observations in each profile was assumed to be a first-order auto-regressive model. Applying a transformation technique, the effect of auto-correlation was first eliminated and then, each of the three parameters of a simple linear profile was monitored separately by an EWMA control chart until a signal was generated. At this time, the estimator was applied to estimate the true change point. Comparing the performance of the proposed MLE of the change point with built-in change-point estimator of the EWMA chart, we showed that the proposed MLE provides adequately accurate and precise estimates of the change point and outperforms the built-in estimator of the EWMA chart, regardless of the shift magnitude and the auto-correlation coefficient.

While we showed that an increase in the auto-correlation coefficient leads to an increase in the average run length and hence an increase in the change-point estimates, developing a method to estimate the change point that is not affected by the auto-correlation coefficient may be an interesting area for future research. Moreover, one may extend the proposed method for other auto-correlated profiles such as ARMA(p , q) auto-correlated multivariate linear profiles as well. In addition, the effect of smoothing parameter, decreasing shifts in the parameters, and the confidence set of the proposed estimators can be investigated in further studies.

Open Access This article is distributed under the terms of the Creative Commons Attribution 4.0 International License (<http://creativecommons.org/licenses/by/4.0/>), which permits unrestricted use, distribution, and reproduction in any medium, provided you give appropriate credit to the original author(s) and the source, provide a link to the Creative Commons license, and indicate if changes were made.

References

- Amiri A, Jensen WA, Kazemzadeh RB (2010) A case study on monitoring polynomial profiles in the automotive industry. *Qual Reliab Eng Int* 26:509–520
- Amiri A, Eyvazian M, Zou C, Noorossana R (2012) A parameters reduction method for monitoring multiple linear regression profiles. *Int J Adv Manuf Technol* 58:621–629
- Atashgar K, Noorossana R (2010) An integrating approach to root cause analysis of a bivariate mean vector with a linear trend disturbance. *Int J Adv Manuf Technol* 52:407–420
- Box GEP, Cox DR (1964) An analysis of transformations. *J R Stat Soc Ser B (Methodological)* 26:211–252
- Eyvazian M, Noorossana R, Saghaei A, Amiri A (2011) Phase II monitoring of multivariate multiple linear regression profiles. *Qual Reliab Eng Int* 27:281–296
- Fahmy HM, Elsayed EA (2006) Drift time detection and adjustment procedures for processes subject to linear trend. *Int J Prod Res* 44:3257–3278
- Ghazanfari M, Alaeddini A, Niaki STA, Aryanezhad MB (2008) A clustering approach to identify the time of a step change in Shewhart control charts. *Qual Reliab Eng Int* 24:765–778
- Hosseinifard SZ, Abdollahian M, Zeepongsekul P (2011) Application of artificial neural networks in linear profile monitoring. *Expert Syst Appl* 38:4920–4928
- Jensen WA, Birch JB (2009) Profile monitoring via nonlinear mixed models. *J Qual Technol* 41:18–34
- Jensen WA, Birch JB, Woodall WH (2008) Monitoring correlation within linear profiles using mixed models. *J Qual Technol* 40:167–183
- Kang L, Albin SL (2000) On-line monitoring when the process yields a linear profile. *J Qual Technol* 32:418–426
- Kazemzadeh RB, Noorossana R, Amiri A (2010) Phase II monitoring of autocorrelated polynomial profiles in AR(1) processes. *Scientia Iranica E* 17:12–24
- Kazemzadeh RB, Noorossana R, Ayoubi M (2014) Change point estimation of multivariate linear profiles under linear drift. *Commun Stat Simulat Comput*, to appear
- Keramatpour M, Niaki STA, Khedmati M, Soleymanian ME (2013) Monitoring and change point estimation of AR(1) autocorrelated polynomial profiles. *Int J Eng* 26:933–942

- Keramatpour M, Niaki STA, Amiri A (2014) Phase-II monitoring of autocorrelated AR(1) polynomial profiles. *J Optimiz Ind Eng* 7(14):53–59
- Khedmati M, Niaki STA (2015) Phase II monitoring of general linear profiles in the presence of between-profile autocorrelation. *Qual Reliabil Eng Int*. doi:10.1002/qre.1762
- Kim K, Mahmoud MA, Woodall WH (2003) On the monitoring of linear profiles. *J Qual Technol* 35:317–328
- Mahmoud MA (2008) Phase I analysis of multiple linear regression profiles. *Commun Stat Simulat Comput* 37:2106–2130
- Mahmoud MA, Woodall WH (2004) Phase I analysis of linear profiles with calibration applications. *Technometrics* 46:380–391
- Mahmoud MA, Morgan JP, Woodall WH (2010) The monitoring of simple linear regression profiles with two observations per sample. *J Appl Stat* 37:1249–1263
- Nedumaran G, Pignatiello JJ, Calvin JA (2000) Identifying the time of a step change with χ^2 control charts. *Qual Eng* 13:153–159
- Niaki STA, Khedmati M (2012) Detecting and estimating the time of a step-change in multivariate Poisson processes. *Scientia Iranica E* 19:862–871
- Niaki STA, Khedmati M (2013) Estimating the change point of the parameter vector of multivariate Poisson processes monitored by a multi-attribute T^2 control chart. *Int J Adv Manuf Technol* 64:1625–1642
- Niaki STA, Khedmati M (2014a) Change point estimation of high-yield processes experiencing monotonic disturbances. *Comput Ind Eng* 67:82–92
- Niaki STA, Khedmati M (2014b) Monotonic change-point estimation of multivariate Poisson processes using a multi-attribute control chart and MLE. *Int J Prod Res* 52:2954–2982
- Niaki STA, Khedmati M, Soleymanian ME (2014) Statistical monitoring of autocorrelated simple linear profiles based on principal components analysis. *Commun Stat*. doi:10.1080/03610926.2013.835417
- Nishina K (1992) A comparison of control charts from the viewpoint of change point estimation. *Qual Reliabil Eng Int* 8:537–541
- Noorossana R, Shadman A (2009) Estimating the change point of a normal process mean with a monotonic change. *Qual Reliabil Eng Int* 25:79–90
- Noorossana R, Amiri A, Soleimani P (2008) On the monitoring of autocorrelated linear profiles. *Commun Stat* 37:425–442
- Perry MB, Pignatiello JJ (2005) Estimation of the change point of the process fraction nonconforming in SPC applications. *Int J Reliab Qual Saf Eng* 12:95–110
- Perry MB, Pignatiello JJ (2006) Estimation of the change point of a normal process mean with a linear trend disturbance in SPC. *Qual Technol Quant Manag* 3:325–334
- Perry MB, Pignatiello JJ (2010) Identifying the time of step change in the mean of autocorrelated processes. *J Appl Stat* 37:119–136
- Perry MB, Pignatiello JJ, Simpson JR (2006) Estimating the change point of a Poisson rate parameter with a linear trend disturbance. *Qual Reliabil Eng Int* 22:371–384
- Perry MB, Pignatiello JJ, Simpson JR (2007) Estimating the change point of the process fraction non-conforming with a monotonic change disturbance in SPC. *Qual Reliabil Eng Int* 23:327–339
- Pignatiello JJ, Samuel TR (2001) Estimation of the change point of a normal process mean in SPC applications. *J Qual Technol* 33:82–95
- Saghaei A, Mehrjoo M, Amiri A (2009) A CUSUM-based method for monitoring simple linear profiles. *Int J Adv Manuf Technol* 45:1252–1260
- Samuel TR, Pignatiello JJ, Calvin JA (1998a) Identifying the time of a step change with \bar{X} control charts. *Qual Eng* 10:521–527
- Samuel TR, Pignatiello JJ, Calvin JA (1998b) Identifying the time of a step change in a normal process variance. *Qual Eng* 10:529–538
- Sharafi A, Aminnayeri M, Amiri A (2013a) Identifying the time of step change in binary profiles. *Int J Adv Manuf Technol* 63:209–214
- Sharafi A, Aminnayeri M, Amiri A (2013b) An MLE approach for estimating the time of step changes in Poisson regression profiles. *Scientia Iranica E* 20:855–860
- Sharafi A, Aminnayeri M, Amiri A, Rasouli M (2013c) Estimating the change point of binary profiles with a linear trend disturbance. *Int J Ind Eng Prod Res* 24:123–129
- Soleimani P, Noorossana R, Amiri A (2009) Simple linear profiles monitoring in the presence of within profile autocorrelation. *Comput Ind Eng* 57:1015–1021
- Sullivan JH, Woodall WH (2000) Change-point detection of mean vector or covariance matrix shifts using multivariate individual observations. *IIE Trans* 32:537–549
- Zand A, Yazdanshenas N, Amiri A (2013) Change point estimation in phase I monitoring of logistic regression profile. *Int J Adv Manuf Technol* 67:2301–2311
- Zhang J, Li Z, Wang Z (2009) Control chart based on likelihood ratio for monitoring linear profiles. *Comput Stat Data Anal* 53:1440–1448
- Zhang Y, He Z, Zhang C, Woodall WH (2014) Control charts for monitoring linear profiles with within profile correlation using Gaussian process models. *Qual Reliabil Eng Int* 30:487–501
- Zou C, Zhang Y, Wang Z (2006) A control chart based on a change-point model for monitoring linear profiles. *IIE Trans* 38:1093–1103
- Zou C, Tsung F, Wang Z (2007) Monitoring general linear profiles using multivariate exponentially weighted moving average schemes. *Technometrics* 49:395–408

