



## **PERFORMANCE EVALUATION OF VISCOELASTIC AND FRICTION PASSIVE DAMPING SYSTEMS IN VIBRATION CONTROL OF TALL BUILDINGS**

Ehsan Noroozinejad Farsangi<sup>1</sup>

*Structural Engineering Research Center, International Institute of Earthquake Engineering and Seismology, Tehran, Iran*

Received 15 November 2010

Revised 7 November 2011

Accepted 2 December 2011

This paper provides a comparison of the maximum inter-story drifts and tip acceleration of both a 16 and 30 stories building each with different structural systems; hybrid R.C moment frame with shear walls and hybrid steel frame with shear walls and X bracing which are equipped by passive dampers. Each of the building models were analyzed as fully non-linear structures for variety of dampers placements and subjected to a total of 4 different earthquake excitations. Three-dimensional (3D) finite-element models have been developed in the (FE) code LUSAS to predict the effects of passive damping on the vibrating structures. The manuscript tries to presents a rational comparison for determining dynamic response of seismic-excited high-rise buildings installed with friction and viscoelastic dampers in the cut outs of shear walls in order to capture their advantages in creating efficient damping systems. The results have shown that it is possible to achieve seismic mitigation, under all earthquake excitations, for all the structures considered in this study, by using appropriate damper types suitably located within the structure.

*Keywords:* passive damping, seismic-excited, hybrid structural system, FEM

### **1. Introduction**

Earthquakes are one of the most devastating natural hazards that cause great loss of life and livelihood. On average, 10,000 people die each year due to earthquakes, while annual economic losses are in the billions of dollars and often constitute a large percentage of the gross national

---

<sup>1</sup> Ph.D. Student

**Correspondence to:** E. Noroozinejad Farsangi, International Institute of Earthquake Engineering and Seismology, No. 29, Arghavan Ave. Farmanieh, Tehran, Iran, E-mail: [ehsan.noroozinejad@gmail.com](mailto:ehsan.noroozinejad@gmail.com)

product of the country affected. Additionally, the damage caused by earthquakes is almost entirely associated with manmade structures. As in the cases of landslides, earthquakes also cause death by the damage they induce in structures such as buildings, dams, bridges and other works of man. Unfortunately many of earthquakes give very little or no warning before occurring and this is one of the reasons why earthquake engineering is complex.[Amiri, G. G. *et al.*, (2005); Bhatti, M. A. *et al.* (1981)].

In the past few years, the earthquake engineering community has been reassessing its procedures, in the wake of devastating earthquakes which caused extensive damage, loss of life and property (e.g. Northridge, California, 17 January 1994; \$ 30 billion and 60 dead; Hyogo-ken Nanbu, Japan, 17 January 1995; \$ 150 billion and 6,000 dead)[Elnashai A.S., Sarno L.D. 2008]. Some of the major problems relating to earthquake design are created by the original design concept chosen by the architect. No engineer can truly transform a badly conceived building into an earthquake resistant building. The damages which have occurred during earthquake events clearly demonstrate that the shape of a building is crucial to how they respond. The ideal aspects of a building form are simplicity, regularity and symmetry in both elevation and plan. These properties all contribute to a more predictable and even distribution of forces in a structure while any irregularities are likely to lead to an increased dynamic response, at least in certain locations of the structure. [Goel, S. C. *et al.*(1989); Balendra, T *et al.* (2005); J'armai, K. *et al.* (2006)].

Also buildings, which are tall in comparison to their plan area, will generate high overturning moments while buildings with large plan areas may not act as expected due to differences in-ground behaviour, which are not always predictable. This causes different parts of the building to be shaken differently creating obvious problems. Torsion from ground motion could be of great concern due to eccentricity in the building layout. For instance if the center of mass (gravity) is not in the same position as the center of resistance; a torsional moment about a vertical axis will be created which will have to be designed for. In order to achieve satisfactory earthquake response of a structure, three methods can be identified as being practical and efficient: isolation, energy absorption at plastic hinges, and use of mechanical devices to provide structural control. [Hosseini, M., Noroozinejad Farsangi, E. (2012); Marko, J. *et al.*,(2009); Abbas, H. and Kelly, J. M., (1993); Ahlawat, A.S and Ramaswamy, A., (2000); Aiken, I.D. *et al.* (1990); Ashour, S. A. and Hanson, R. D., (1987); Bhaskararao A.V. and Jangid, R.S., (2006); Chang, K. C. *et al.* (1993); Cherry, S. and Filiatrault, A., (1993); Kasai, K. *et al.* (1998); Pong, W. S. *et al.*(1994); Shen, K. L. and Soong, T. T., (1995); Boller, C. *et al.*(2009); Singh MP, Moreschi LM., (2000); Soong, T. T., & Dargush, G. F. (1997); Zhang, R. H., & Soong, T. T. (1992)].

## **2. Scope of the Study**

The use of passive energy dissipation devices has become very popular in the recent years. However, the vast majority of applications was realized within frame structures, while

investigations on the use of damping devices within cut outs of shear walls is still very limited. For this reason the aim of this research is to investigate the behaviour of multi-storey frame-shear wall building structures under earthquake loads with damping devices strategically located within the cut outs of the shear walls. The research will evaluate the influence of different damping systems on the overall seismic response of the structure.[Hahn, G. D., & Sathiavageswaran, K. R. (1992)].

### 3. Seismic Isolating Systems

In order to control the vibration response of high and medium rise buildings during seismic events, energy absorbing passive damping devices are most commonly used for energy absorption. Today there are a number of types of manufactured dampers available in the market, which use a variety of materials and designs to obtain various levels of stiffness and damping. Some of these include friction, yielding, viscoelastic and viscous dampers. These dampers are usually installed between two load bearing elements (walls or columns) in the new buildings. In the existing buildings, which require retrofitting, they could be installed in cut-outs of shear walls, as evidenced from recent investigations. An effective damping system can result in higher levels of safety and comfort, and can also lead to considerable savings in the total cost of a building.[Aiken, I.D. *et al.* (1990); Ashour, S. A. and Hanson, R. D., (1987); Bhaskararao A.V. and Jangid, R.S., (2006);Chang, K. C. *et al.* (1993); Christopoulos, C., & Filiatrault, A. (2006);H. Harada, M. Ishii, T. Yamane, and T. Kobori.(2005); Shukla AK, Datta TK, (1999);Takewaki, I. (1997); Takewaki, I. (2009); Trombetti, T., & Silvestri, S. (2004);Yamamoto, K. *et al.* (2010)].

#### 3.1. Yielding Steel Bracing Systems

*Yielding steel bracing systems* fabricated from round steel bars for cross-braced structure have been developed in New Zealand. Energy is dissipated by inelastic deformation of the rectangular steel frame in the diagonal direction of the tension brace, as shown in Figure 1. Several modifications of the steel cross-bracing dissipater have been developed and installed in Italy.

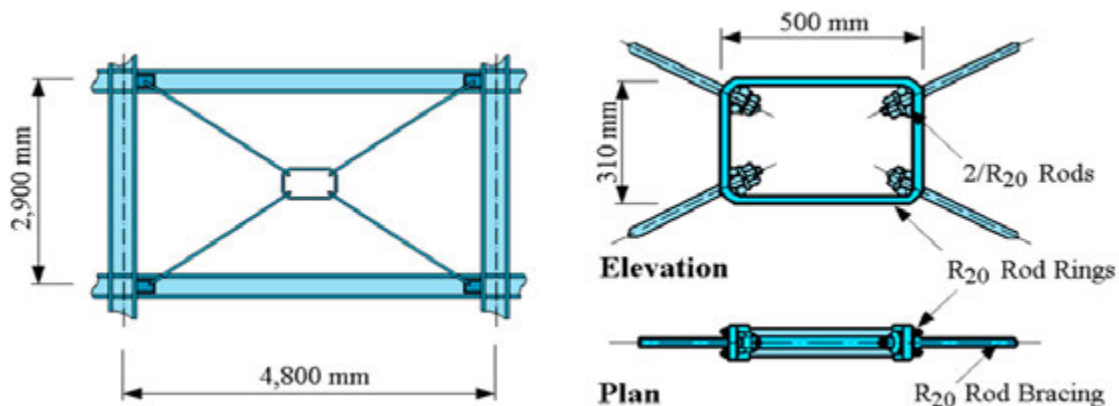


Figure 1. Yielding steel bracing system

All these metallic yielding dampers may be effective in reducing the response of structures to earthquake loading. The post-yielding deformation range of these dampers is a major concern, which should be addressed to insure that the dampers can sustain a sufficient number of cycles of deformation without premature fatigue. Another problem, which should be worked out carefully, is the stable hysteretic behaviour of the dampers under repeated inelastic deformation.

### 3.2. Lead Extrusion Damper (LED)

Lead extrusion damper (LED) represents another class of dampers, which utilized the hysteretic energy dissipation properties of metal. The process of extrusion consists of forcing a lead piston through a hole or an orifice, thereby changing its shape. LEDs were first suggested as a passive energy dissipation device for base isolated structures in New Zealand. As it can be seen from Figure 2, there are two types of LEDs introduced by Robinson. The first device consists of a thick-walled tube and a co-axial shaft with a piston. There is a constriction on the tube between the piston heads and the space between the piston heads is filled with lead. The central shaft extends beyond one end of the tube. When external excitation occurred, the piston moves along the tube and the lead is forced to extrude back and forth through the orifice formed by the constriction of the tube.

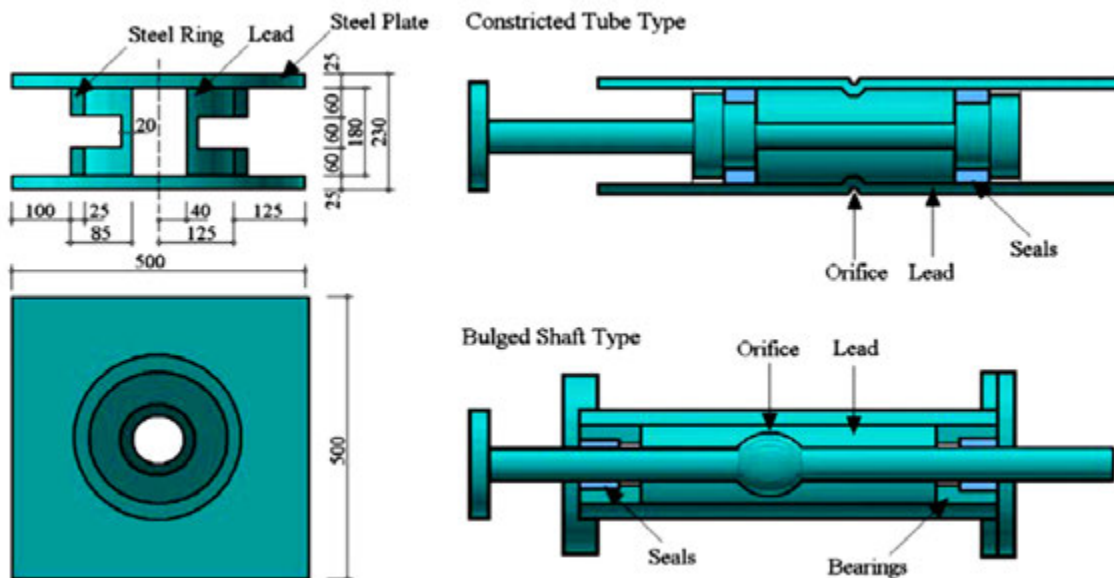


Figure 2. Two examples of lead extrusion devices

### 3.3. X-Braced Damper

*X-braced damper* was proposed in 1982. In this type of damper, the braces in a moment resisting frame incorporated frictional devices. When load is applied to this damper, the tension brace induces slippage at the friction joint. Consequently, the four links force compression brace to

slip. Energy is dissipated in both braces even though they were designed to be effective in tension only. However, this is only valid if the slippage of the device is sufficient to completely straighten any buckled braces.

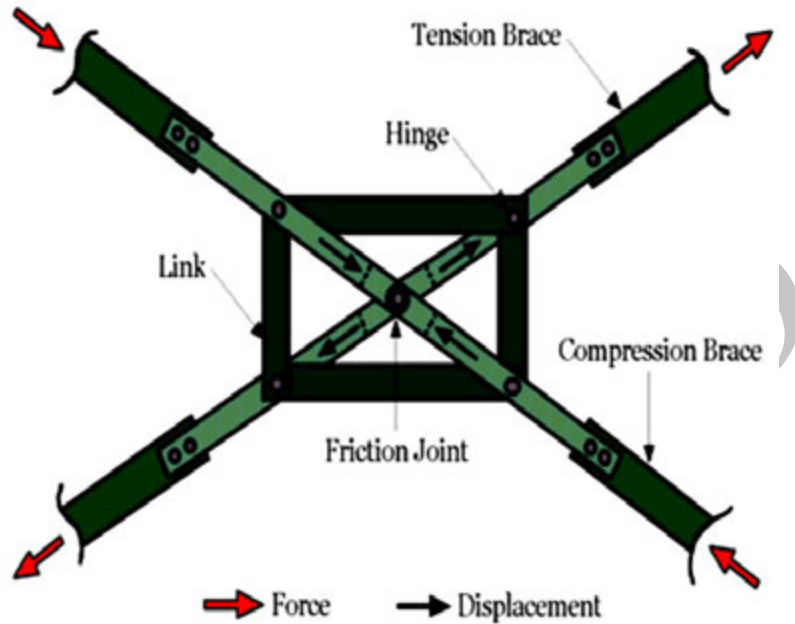


Figure 3. Pall friction damper

### 3.4. Uniaxial Friction Damper

Uniaxial friction damper (Figure 4) manufactured by Sumitomo Metal Industries Ltd., utilizes a slightly more sophisticated design. The pre-compressed internal spring exerts a force that is converted through the action of inner and outer wedges into a normal force on the friction pads. These copper alloy friction pads contain graphite plug inserts, which provides dry lubrication. This helps to maintain a consistent coefficient of friction between the pads and the inner surface of the stainless steel casing.

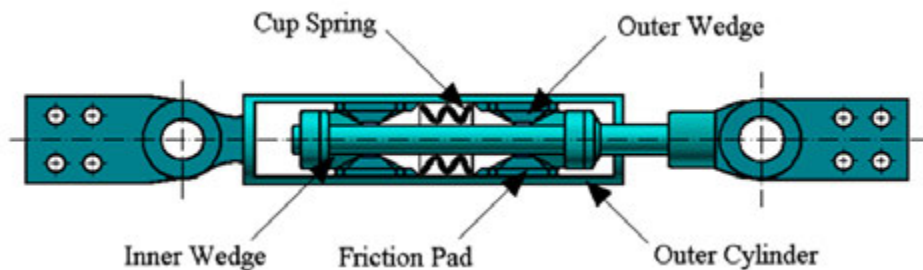


Figure 4. Uniaxial friction damper

### 3.5. Sumitomo Friction Damper

Sumitomo friction damper was investigated by Aiken and Kelly (1990). The inventors performed experimental and numerical examinations of this damper installed on 1/4-scale 9 storey steel frame in conjunction with chevron brace assembly. The performance of the friction dampers was outstanding. The hysteresis loops showed very consistent, nearly ideal Coulomb behaviour throughout the duration of the test and approximately 60% of the input energy was dissipated in the dampers.

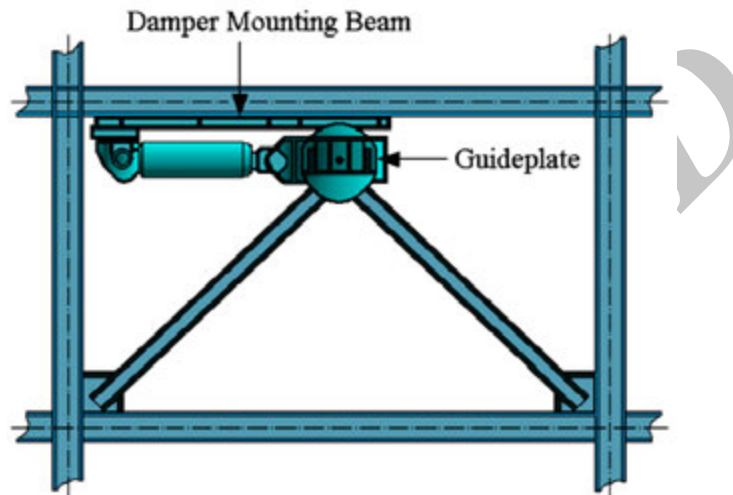


Figure 5. Installation of uniaxial friction damper in steel frame

### 3.6. Solid VE Dampers

Solid VE dampers are constructed from constrained layers of acrylic polymers or copolymers and designed to produce damping forces through shear deformations in the VE material. When deformed, the VE materials exhibit the combined features of an elastic solid and viscous liquid; i.e. they return to their original shape after each cycle of deformation and dissipate a certain amount of energy as heat.

### 3.7. Metallic Dampers

Metallic dampers utilize the hysteretic behaviour of metals in the inelastic range. The resisting forces of the dampers, consequently, depend on the nonlinear stress-strain characteristics of the metallic material. A wide variety of damping devices that utilize shear, flexure and material deformation in the plastic range have been developed and tested. The most desirable characteristic of these devices are their stable hysteretic behaviour, low-cycle fatigue property, long term reliability, and relative insensitivity to change in temperature. In addition, these devices are relatively inexpensive and their properties will remain stable over the long lives of structures.

Disadvantages of these devices are their limited number of working cycles and their non-linear response.

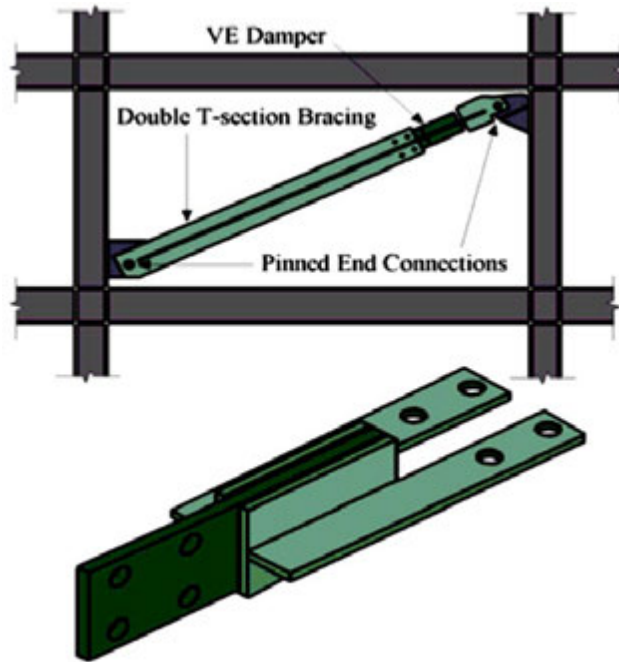


Figure 6. Typical VE solid damper

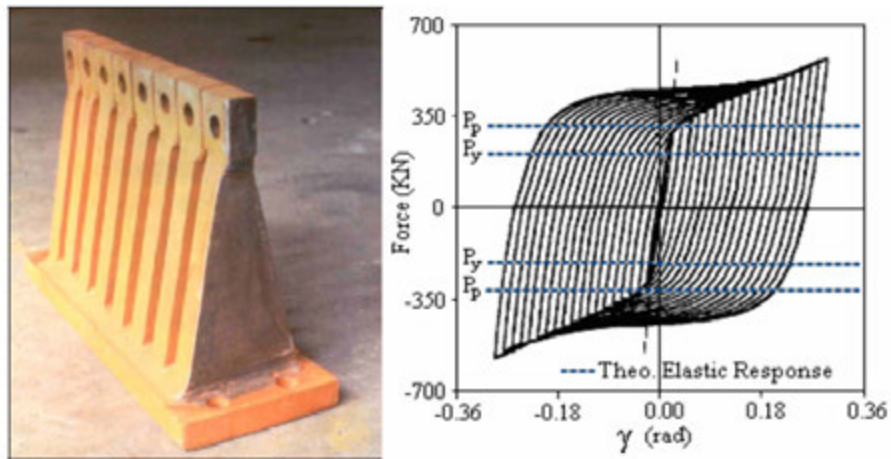


Figure 7. Triangular shaped damper and its hysteresis loops

### 3.8. Slotted Bolted Damper

A schematic view of this type of damper can be seen in Figure 8. This damper allows slip to occur in slotted bolted connections. The connection consists of gusset plate, two back to back channels, cover plates, and bolts with washers. The sliding interface consists of steel.

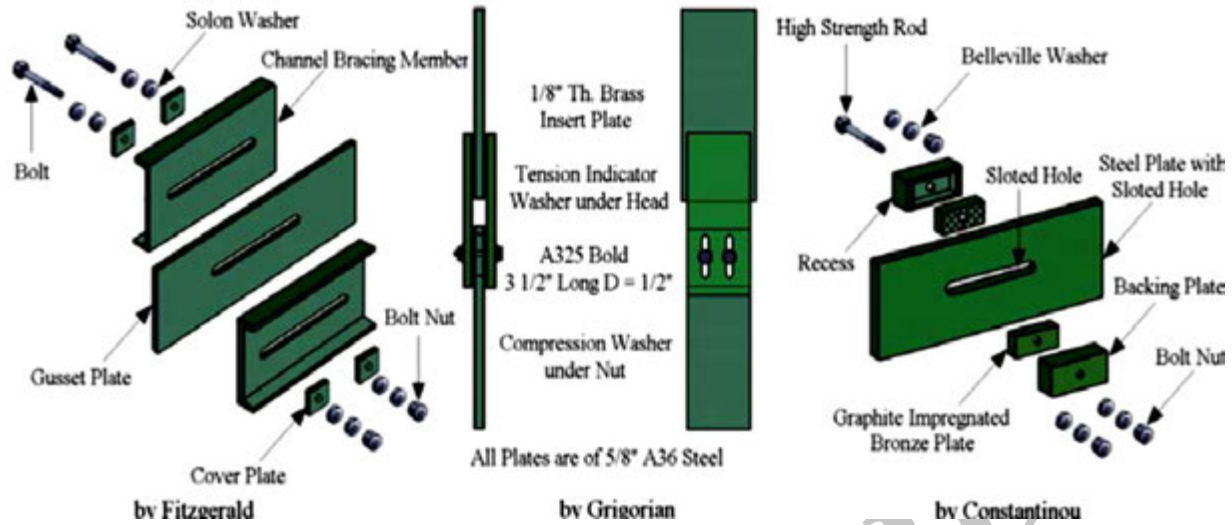


Figure 8. Three examples of slotted bolted connections

### 3.9. Viscous- Damping Wall System

It was developed by Sumitomo Construction Company in Japan. The device consists of an outer steel casing attached to the lower floor, filled with a highly viscous fluid. An inner moving steel plate hanging from the upper floor is contained within the steel casing. The viscous damping force is induced by the relative velocity between the two floors. The inventor of this type conducted experimental tests on a full scale 4-storey steel frame with and without viscous damping walls. The results of frame fitted with viscous walls revealed response reductions of 66 to 80%. A 4-storey reinforced concrete building with viscous damping walls was constructed in Tsukuba, Japan and has since been monitored for earthquake response. The viscous damping walls installed in the 78 m high steel frame building in Shizuoka City, Japan, provided 20 to 35% damping and reduced the building response up to 70 to 80%.

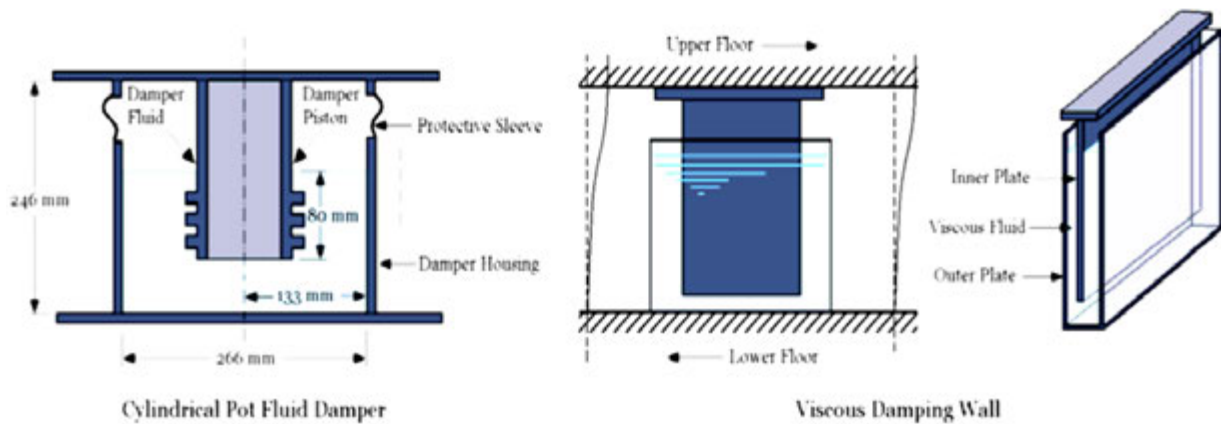


Figure 9. Viscous damping wall system (Based on Sumitomo Construction Company, 1996)



### 3.10. Tuned Mass Damper (TMD)

TMD consists of a mass, which moves relatively to the structure and is attached to it by a spring and a viscous damper in parallel. The structural vibration generates the excitation of the TMD. As a result, the kinetic energy is transferred from the structure to the TMD and is absorbed by the damping component of the device. The TMD usually experience large displacements.

### 3.11. Tuned Liquid Damper (TLD) and Tuned Liquid Column Damper (TLCD)

The tuned liquid damper (TLD) and tuned liquid column damper (TLCD), similar to a TMD impact indirect damping to the system and thus improves the structural response. A TLD dissipates energy by means of viscous actions of the fluid and wave breaking. In the case of TLCD, energy is dissipated by the passage of liquid through an orifice with inherent head loss characteristics.

## 4. Dynamic Analysis

The time history analysis determines the response of a structure due to forces, displacements, velocities or accelerations that vary with time. There are two versions of this method, first is direct integration and the second, modal superposition [Clough. R.W. and Penzien. J. (1995); Hart, G.C. *et al.* (2000)]. Modal superposition is only suitable for linear analysis, whereas direct integration can be used also for nonlinear analysis. The direct integration utilizes a step-by-step solution of Equation of motion, which is generally described as:

$$M\ddot{U} + C\dot{U} + KU = F(t) \quad (1)$$

Where,  $M, C, K$  are the mass, the damping, and the stiffness matrices, respectively,  $U, \dot{U}$ , and  $\ddot{U}$  are the displacement, velocity and acceleration vectors, respectively,  $F(t)$  is the vector of applied forces, which may varied with time. The most popular integration scheme is the Newmark- $\beta$  method, which is implicit and unconditionally stable. The following approximations are made in this method:

$$\{\dot{U}\}_{t+dt} = \{\dot{U}\}_t + \left( \{\ddot{U}\}_t + \{\ddot{U}\}_{t+dt} \right) \frac{dt}{2} \quad (2)$$

$$\{U\}_{t+dt} = \{U\}_t + \{\dot{U}\}dt + \left( \left( \frac{1}{2} - \beta \right) \{\ddot{U}\}_t + \beta \{\ddot{U}\}_{t+dt} \right) (dt)^2 \quad (3)$$

where  $dt$  is the time step of the analysis, and  $\beta$  is the structural damping that depends on an amplitude decay factor, but usually a value of 0.25 is used.

## 5. Methodology of the Research

This study comprehensively investigates the seismic response of 30 and 16 storey frame-shear wall structures with dampers located within cut-outs. Two types of damping mechanisms were investigated. The first damping mechanism involves the use of friction damper; the second damping mechanism involves the use of VE damper.

### 5.1. Finite Element Analysis

Finite Element (FE) methods have been employed in this research to model, analyze and investigate the effects of the two types of damping devices on the seismic response of structures. For the purpose of this study, the programs selected for the numerical analysis have been SAP2000 and LUSAS Standard Version.

A direct integration dynamic analysis was selected to obtain the response of the structure under seismic loading. This analysis assembles the mass, stiffness and damping matrices and solves the equations of dynamic equilibrium at each point in time. The response of the structure is obtained for the selected time steps of the input earthquake accelerograms. To study the effectiveness of the damping system in mitigating the seismic response of the buildings in this study, the maximum displacements and accelerations at the top of the structures are obtained from the results of the analysis and compared with those of the undamped building structure. [Zienkiewicz, O.C., Taylor, R.L., (2005)].

### 5.2. Boundary Conditions

The earthquake events used in this study were recorded as time-history accelerations in the horizontal plane. The acceleration was applied in the X-direction at the base of the structure, as shown in Figure 10. The support at the base of the structure was restrained against translation in the Y-direction, and rotation about the Z-axis, thereby allowing only the X-direction translation.

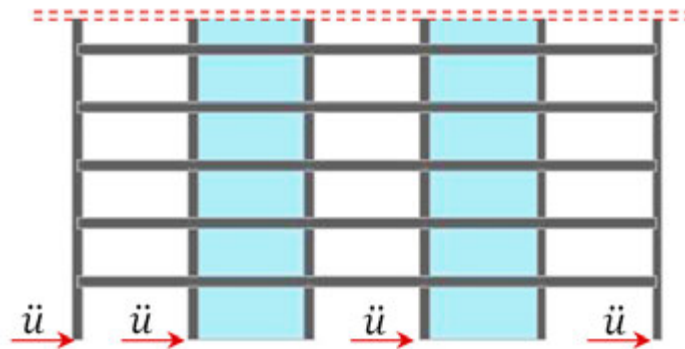


Figure 10. Model location of applied acceleration

### 5.3. Material Properties

Steel and concrete material properties were chosen for the models. The concrete had a compressive strength,  $f'_c$  of 35 MPa, Young's modulus,  $E_c$  of 30,000 MPa, which reflects an assessment assuming predominantly elastic response with little cracking, Poisson's ratio,  $\nu$  of 0.2, and density,  $\rho$  of 2500 kg/m<sup>3</sup>. No internal damping was considered for the concrete since it was assumed small in relation to the damping provided by the damping devices. Structural steel was used to model steel frames and friction dampers with yield strength,  $f_y$  of 400 MPa, and Young's modulus,  $E_c$  of 207,000 MPa, Poisson's ratio  $\nu$  of 0.3 and density,  $\rho$  of 7800 kg/m<sup>3</sup>.

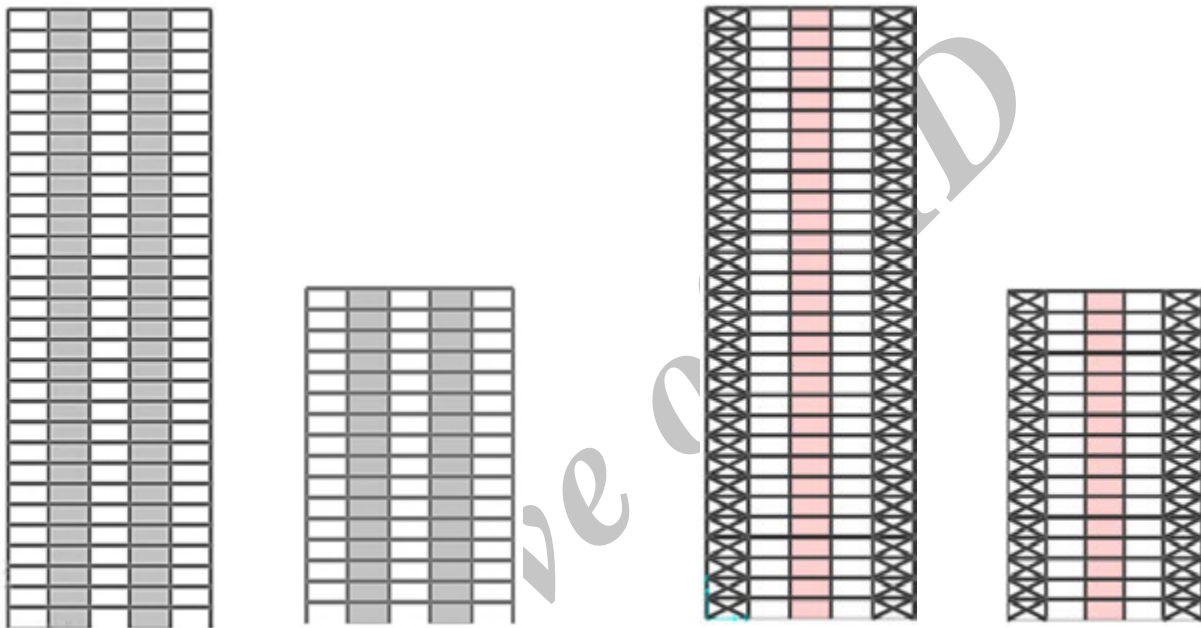


Figure 11. Modelled structures of 16 and 30 storey buildings in FE softwares

#### 5.3.1. Nonlinear Concrete Material Modeling

One of the methods to model nonlinear concrete material modeling is multi-cracking concrete with crushing model. This model stimulates the nonlinear behaviour of concrete in both compression and tension at the same time. Therefore, the yield function consists of the two main parameters which are the tension softening of concrete and compression crushing. As a result, this model is suitable cracking and crushing failure at the same time [LUSAS Software Manual, 2004]. The typical behaviour of the tension stiffening effect and concrete crushing is shown below:

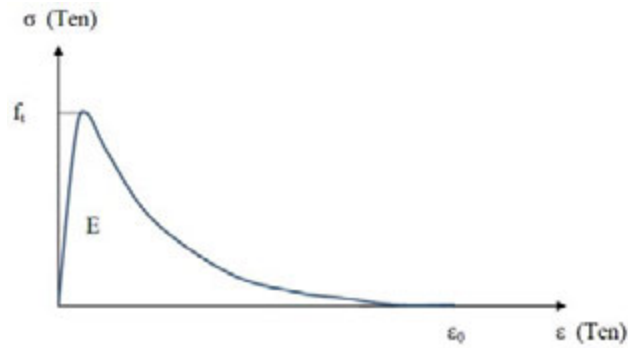


Figure 12. Tension Softening Behaviour of Concrete

Figure 12 shows that the tension behaviour of the concrete. The peak stress of the graph is the tensile strength,  $f_t$  and the slope is the elastic modulus value,  $E$ . The peak stress ends up at the end of tension stiffening value,  $\epsilon_0$ . This behaviour is important when modeling the concrete crack. The concrete crack happens to lose its strength gradually once the concrete tensile strength reaches the peak. Therefore, the problem arises when the crack is modeled as discrete crack because it would increase ductility of the concrete which may not be true.

Table 1. Material Properties for Concrete Components

| <i>Elastic</i>                                 |                      |
|--|----------------------|
| Young Modulus                                  | 30000MPa             |
| Poisson Ratio                                  | 0.2                  |
| <i>Plastic (Cracking &amp; Crushing Model)</i> |                      |
| Tensile Strength                               | 4 N/mm <sup>2</sup>  |
| Compressive Strength                           | 35 N/mm <sup>2</sup> |
| Strain at Peak Compressive Stress              | 0.0030               |
| Strain at End of Compressive Softening Curve   | 0.0035               |
| Strain at End of Tensile Softening Curve       | 0.13-0.8             |

### 5.3.2. Nonlinear Steel Material Modeling

To choose a suitable model, we have to know the behaviour of the steel. The model must be able to stimulate the behaviour of the steel. Here, we choose stress potential method. The stress potential method is able to simulate the yield behaviour in all direction of stress space required under multiaxial stress. Besides that, it could also show the hardening properties of steel in terms of hardening gradient and effective plastic strain [LUSAS Software Manual, 2004]. The graph is shown in Figure 13.

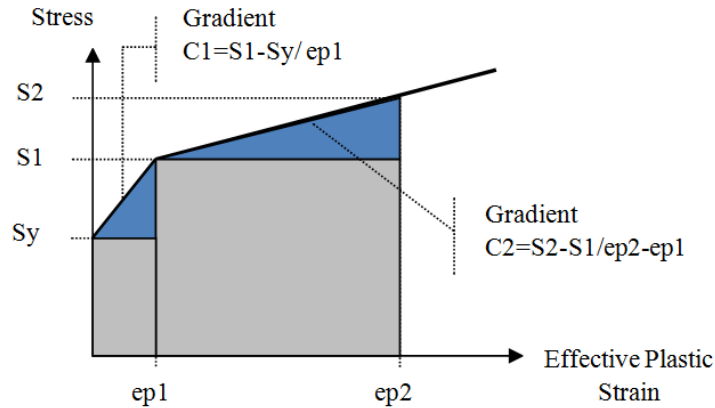


Figure 13. Hardening Properties of Steel

Table 2. Material Properties for Reinforcement and Steel Plate Components

| <i>Elastic</i>                          |                       |
|---|-----------------------|
| Young Modulus                           | 207000 MPa            |
| Poisson Ratio                           | 0.3                   |
| <i>Plastic (Stress Potential Model)</i> |                       |
| Initial Uniaxial Yield Stress           | 400 N/mm <sup>2</sup> |
| Hardening Gradient                      | 2121                  |
| Plastic Strain                          | 5                     |

#### 5.4. Damper Models

##### 5.4.1. Friction Damper Model

The first damping mechanisms employed in this study have been represented by friction dampers. The initial focus of this research was on the development of a model, which represents the real behaviour of friction dampers. This task was achieved by modeling the frictional contact between two tubes, which slide one inside the other.

##### 5.4.2. Viscoelastic Damper Model

The second damping mechanisms employed in this study are represented by VE dampers. Dampers are modelled as a linear spring and dash-pot in parallel (known as the Kelvin model) where the spring represents stiffness and the dashpot represents damping. Abbas & Kelly (1993) define the stiffness and damping coefficients as follows:

$$k_d = \frac{G'A}{t} \quad (4)$$

$$C_d = \frac{G'' A}{\omega t} \quad (5)$$

where,  $A$ , is the shear area of the VE material,  $t$ , is the thickness of the VE material,  $\omega$ , is the loading frequency of the VE damper,  $G'$ , is the shear storage modulus, and  $G''$  is the shear loss modulus. The following Equations were used to obtain the moduli of the VE material as defined by Abbas and Kelly (1993):

$$G' = 16.0 \omega^{0.51} \gamma^{-0.23} e^{(72.46/Temp)} \quad (6)$$

$$G'' = 18.5 \omega^{0.51} \gamma^{-0.20} e^{(73.89/Temp)} \quad (7)$$

Where,  $\gamma$  is the shear strain and Temp is VE material temperature. This model approximates the behaviour of a VE damper under vibratory loading to within 10%, which was considered sufficiently accurate for the purposes of this study. As it can be seen from Equations 6 and 7, the temperature of VE material significantly influences its mechanical characteristics. However, experimental results conducted by Chang et al., (1992) have shown that variation in the damper temperature due to dynamic excitation become negligible after several loading cycles as an equilibrium temperature is reached between the surroundings and the damper. In the present study the temperature was kept constant at 23°C during the entire investigation.[Chang, K.C. (1992)].

### 5.5. Description of the Investigated Structures

The structural models, treated in this research have been predominantly represented by four types of frame-shear wall structures. The first set of models designated by S(c) and S(s) represent two-dimensional 16-storey frame-shear wall structures and the second set of models designated by X(c) and X(s) represent two-dimensional 30-storey frame-shear wall structures. After the preliminary convergence study, the concrete shear walls were constructed from 2016 S4R5 shell elements using shell elements of designation S4R5, having 4 nodes per element and 5 degrees of freedom at each node. The dimensions of the shear walls were 6m wide and 0.4 m thick. The R.C. columns and beams were located on either side of the wall had cross-sectional dimensions of  $0.7 \times 0.7$  m and  $0.65 \times 0.4$  m respectively, for the Steel frame structures 2IPE 270 for the beams and BOX  $60 \times 60 \times 1.5$  cm have been used for the columns and the beam spans were 6.0 m.

The height between storeys was set at 3.5 m, which made the overall height of the structures to be 56.0 m and 105.0 m. A lumped mass of 15,000(R.C.) and 10,000(Steel) kg at each beam-column and beam-shear wall junction was used to account for mass transferred from slabs and beams.

### 5.6. Damper Placements in 16-Storey Structures

One of the main aims of this study was to investigate the efficiency of energy dissipating dampers in vibration control for variety of placements under different earthquake loads [Aydin, E. *et al.* (2007)]. For this purpose ten different damper placements were used to study the influence of location on the seismic response of these models. These models were designated by S(c,1), S(c,3), S(c,6), S(c,9), S(c,12) and S(c,15) for single damper placements in R.C. frames and by S(s,1), S(s,3), S(s,6), S(s,9), S(s,12) and S(s,15) for Steel frames and by S(c,1-4), S(c,5-8), S(c,9-12) and S(c,13-16) for four dampers placement in R.C. frames and by S(s,1-4), S(s,5-8), S(s,9-12) and S(s,13-16) for Steel frames models. As can be seen in Figs. 14 and 15, the designating numbers correspond to location of the storey at which dampers were placed. The undamped structure (Fig. 11) was also analyzed in order to compare results.

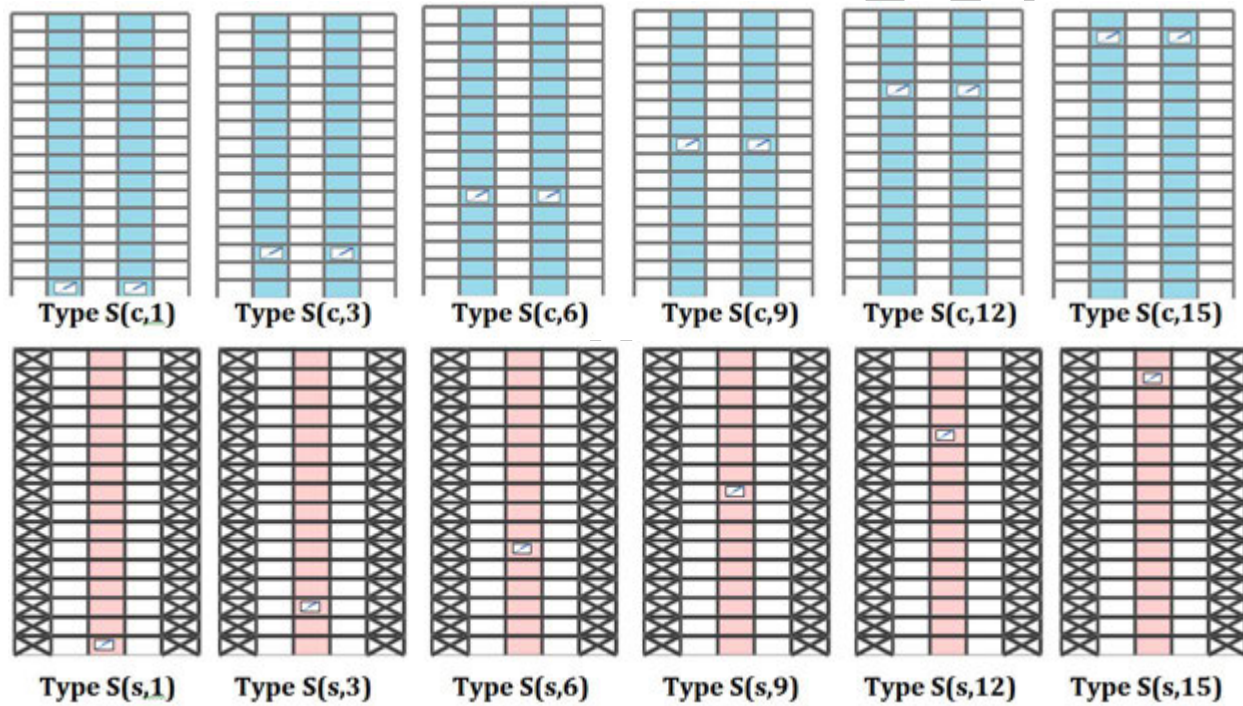


Figure 14: Placements of single damper within 16-storey R.C. and Steel structures

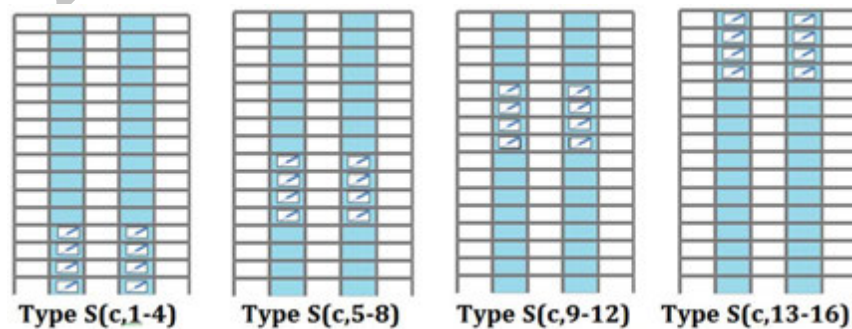


Figure 15: Placements of four dampers within 16-storey R.C. and Steel structures

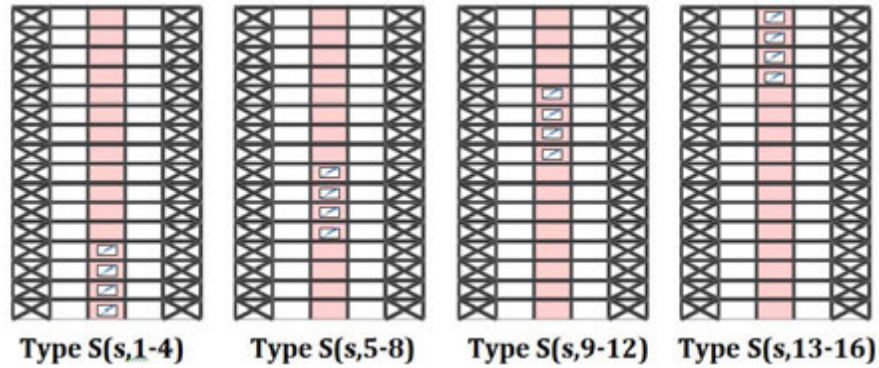


Figure 15 (cont.): Placements of four dampers within 16-storey R.C. and Steel structures

### 5.7. Structural Model with Friction Damper- Diagonal Configuration

Details of the diagonal friction damper located within shear wall of the frame-shear wall model can be seen in Figure 16 where a 3.5 m wide by 3.5 m high wall section was cut out and replaced by the damper. This damper was modelled as a pair of diagonal tubes each with a thickness of 50 mm, and with one tube placed within the other.

- The outer tube having an inner diameter of 180 mm and length 3.75 m was modelled using 264 S4R5 shell elements.
- The inner tube having an outer diameter of 178 mm and length 3.75 m was modelled using 252 S4R5 shell elements.

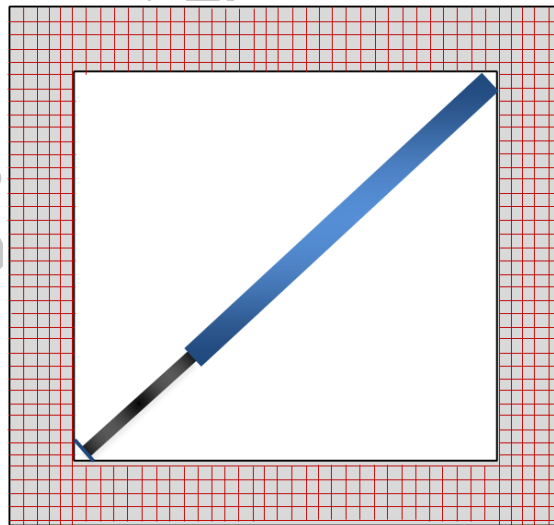


Figure 16. Structural details of diagonal friction damper

The response of this model as well as all others were investigated under the El Centro, Bam, Kobe and Tabas earthquake excitations which will be described later.



### 5.8. Structural Models with VE Damper- Diagonal Configuration

The concrete frame-shear wall was modelled using the same FE mesh, material properties and dimensions as in the previous models. More details of the diagonal VE damper located within the cut out of the shear wall can be seen in Figure 17. The properties of the damper for 16-storeys models were at first calculated as  $K_d = 10 \times 10^6$  N/m and  $C_d = 63 \times 10^6$  Ns/m based on double layer damper in parallel with dimensions of 1,850 mm by 300 mm by 10 mm and the values  $G' = 900,000$  Pa and  $G'' = 300,000$  Pa. These moduli were calculated using the loading frequency  $\omega = 0.718$  Hz, which corresponded to the fundamental frequency of this structure model.

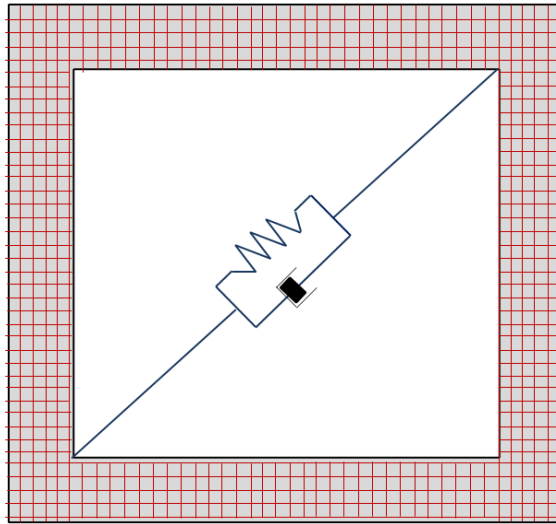


Figure 17. Structural details of diagonal VE damper

### 5.9. Input Earthquake Records

The earthquake records, which were selected to investigate the dynamic response of the models, are:

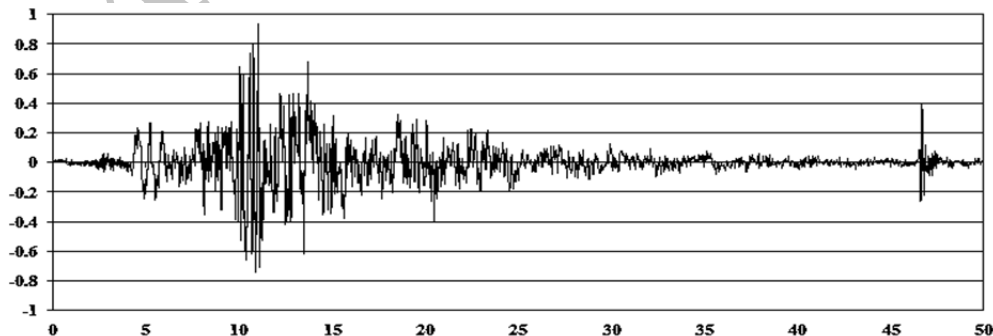


Figure 18. Tabas earthquake (PGA=0.852g)

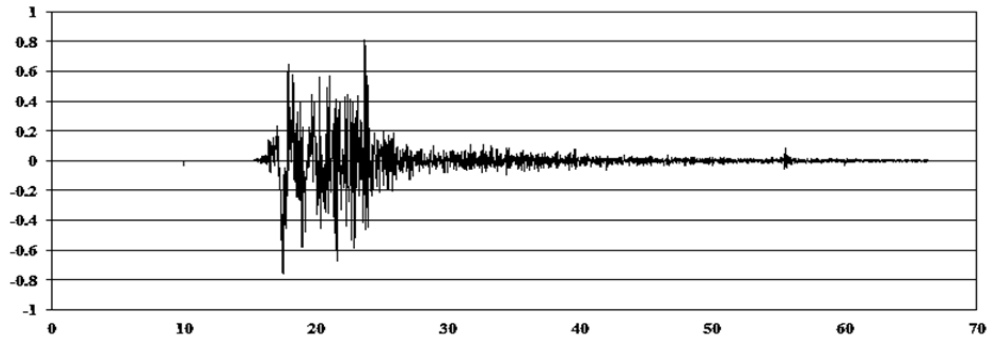


Figure 19. Bam earthquake (PGA=0.815g)

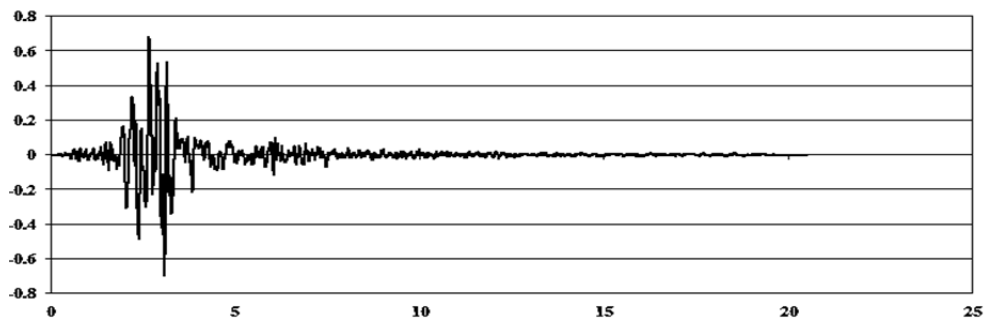


Figure 20. Kobe earthquake (PGA=0.678g)

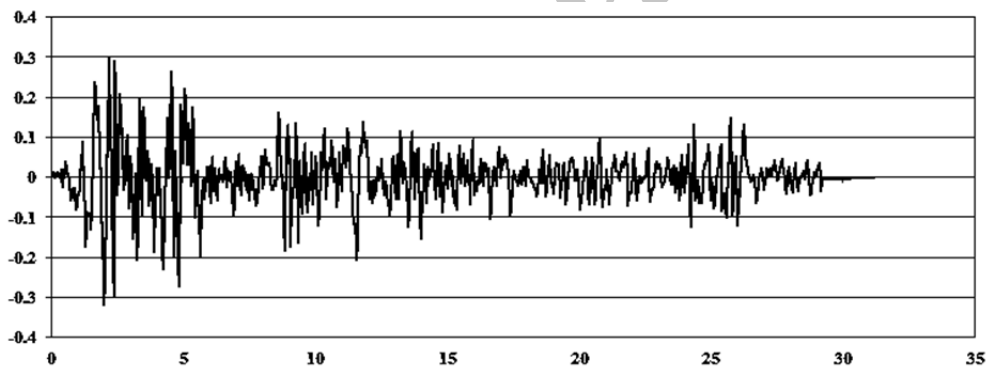


Figure 21. Elcentro earthquake (PGA=0.298g)

### 5.10. Verification of the Results

One of the available alternatives to examine the validity of research results is to use the analytical benchmark models proposed by the American Society of Civil Engineers (ASCE). A committee of ASCE on Structural Control developed a benchmark study, focusing on the comparisons of structural control algorithms for the benchmark structural control problems. Some of these algorithms have been experimentally confirmed at the Laboratory of University of Notre Dame's. The primary objective of this project was to develop benchmark models to provide systematic and standardized means by which a variety of control methods can be examined. Realizing these

objectives allows implementation of innovative control approaches for dynamic hazard mitigation.

The researchers from Faculty of Engineering, University of Technology, Sydney participated in this benchmark project and have published several experimental works, which were conducted in their University's laboratories. Some of these tests were conducted on the five-storey benchmark model subjected to different earthquake excitations. In order to verify the validity of the present research project, a similar model was created and treated under the same earthquake excitations in the computer program LUSAS. The results are compared and evaluated with the results of experimental testing.

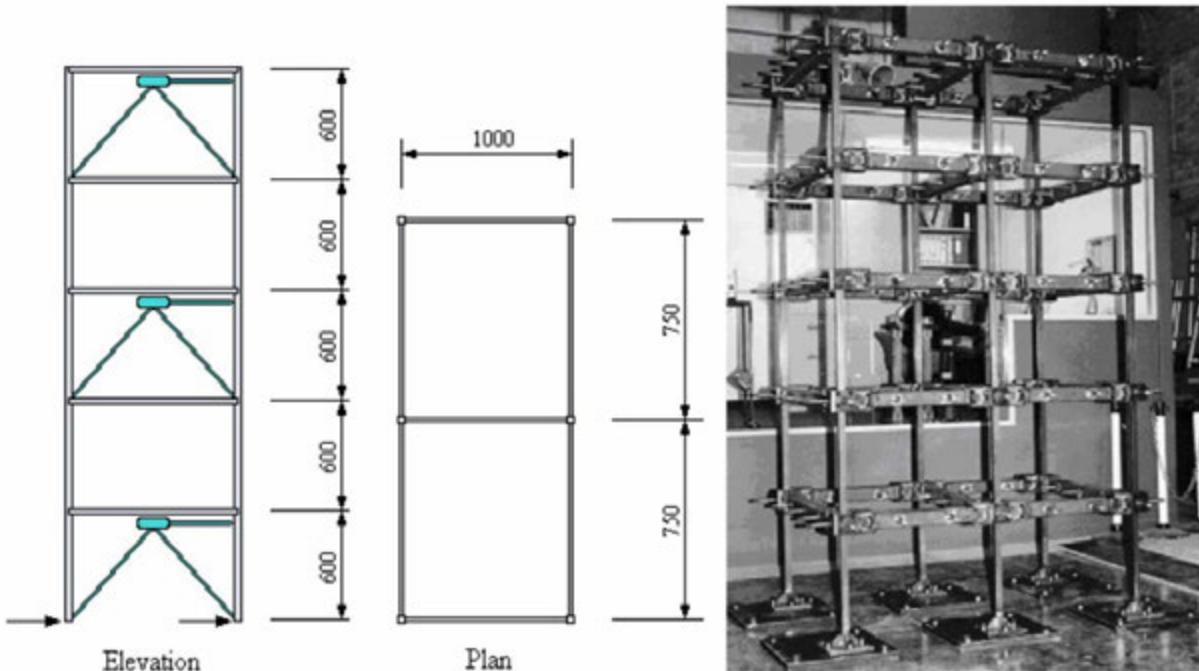


Figure 22. Elevation and plan of the five-storey benchmark model

## 6. Results and Discussions

The results from the finite element analyses of two types of high and medium-rise structure are presented in this section. First type is represented by a 56 m hybrid structures embedded with two different damping systems, namely friction and VE diagonal dampers. These damping systems were installed within cut outs of shear wall at ten different damper placements. Seismic analyses were carried out with one type of damper at one placement at a time. Efficiency of these damping systems was investigated under four different earthquake excitations. This was the first structure treated in this research to determine feasibility of the procedure. The second type is 30 storey buildings with 105 height with hybrid structural system (R.C. frame + Shear wall + Damper & Steel frames + X bracing + Shear wall + Damper).

The results of percentage reduction in tip deflection of the structure embedded with damper of varying properties display overall very high performance. The results reveal the high level of sensitivity of the structure to varying damping properties of dashpot. The best performance with the highest reduction of 42.3% was recorded for dashpot with damping parameter of  $C_d = 70 \times 10^6$  Ns/m. The second highest reductions were recorded for dashpot with damping parameter of  $C_d = 60 \times 10^6$  Ns/m, it was followed by  $C_d = 50 \times 10^6$  Ns/m and  $C_d = 80 \times 10^6$  Ns/m with reductions only slightly lower. In general, it can be stated that dashpot with the values of damping in the range from  $C_d = 20 \times 10^6$  Ns/m to  $C_d = 140 \times 10^6$  Ns/m experienced very high and stable performance, while decrease in the performance was significant when value of the damper was moved out of this range.

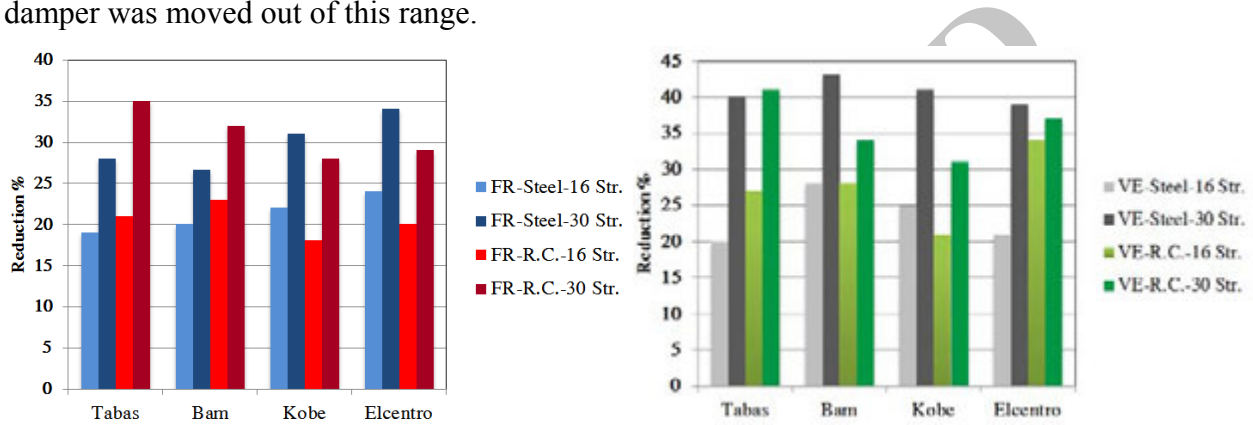


Figure 23: Maximum average tip deflection reductions for different damping systems

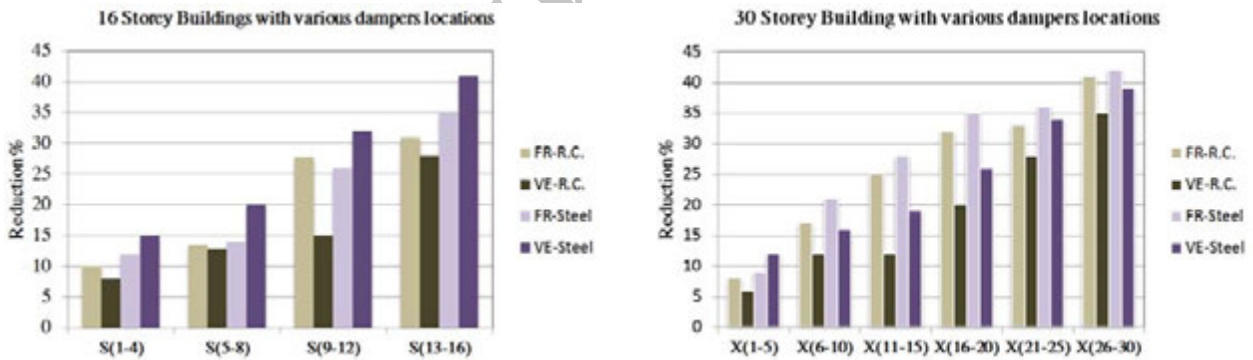


Figure 24: Average tip deflection reductions (under four earthquakes) for different damper locations

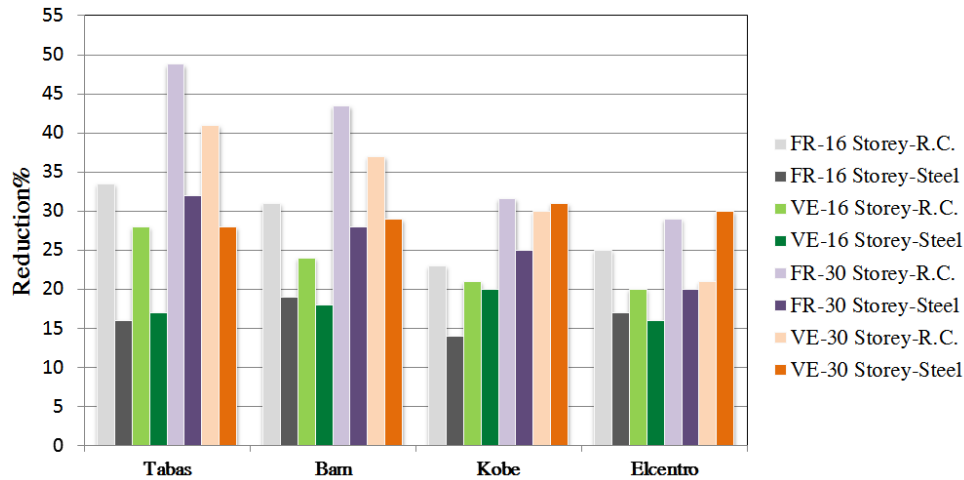


Figure 25: Average tip acceleration reductions for different damping systems under 4 earthquakes

### 6.1. Response of the Structures under Four Earthquake Excitations

The 30-storey structural models were further investigated under four earthquake excitations. Based on results reported in the previous sections it can be seen that the structures experienced the highest performance when  $C_d$  was within the range  $10 \times 10^6$  to  $100 \times 10^6$  Ns/m and  $K_d$  within the range  $1 \times 10^6$  to  $60 \times 10^6$  N/m. Hence in order to facilitate comparisons, approximate average values of  $K_d = 40 \times 10^6$  N/m and  $C_d = 50 \times 10^6$  Ns/m, respectively were determined and used in all subsequent cases. The results showed significant performance of the structures for all damper placements. The high average tip deflection reduction of 10.0% for R.C. frame and 15.0% for steel frame were achieved by the structure with the damper placed in the lower storeys. A slightly higher average tip deflection reduction of 22.8% for R.C. frame and 26.3% for steel frame occurred for the structure with the damper placed in the middle stories, while the highest efficiency with still relatively high an average reduction of 31.1% for R.C. frame and 41.1% for steel frame was experienced by the structure with the upper storeys damper placement. Clearly the highest average tip deflection reduction, as it was expected, was obtained by the structure with the four and five dampers placement. The results of the tip deflection and tip acceleration of these structures obtained under four earthquake excitations are presented in Table 3.

Table 3. Average Tip deflection and tip acceleration of the damped and undamped structures

|   | Tabas |       | Bam   |       | Kobe  |       | Elcentro |       |
|---|-------|-------|-------|-------|-------|-------|----------|-------|
|   | R.C.  | Steel | R.C.  | Steel | R.C.  | Steel | R.C.     | Steel |
| Deflection(m)<br>Undamped                   | 0.259 | 0.212 | 0.235 | 0.208 | 0.168 | 0.176 | 0.161    | 0.152 |
| Deflection(m)<br>Damped                     | 0.181 | 0.148 | 0.169 | 0.146 | 0.129 | 0.132 | 0.114    | 0.120 |
| Acceleration(m/s <sup>2</sup> )<br>Undamped | 8.76  | 6.54  | 7.21  | 5.98  | 5.96  | 6.01  | 4.87     | 4.68  |
| Acceleration(m/s <sup>2</sup> )<br>Damped   | 5.51  | 4.05  | 4.83  | 4.42  | 4.41  | 3.90  | 3.26     | 3.46  |

## **7. Conclusions and Recommendations**

The main contribution of this research was to establish that seismic mitigation of building structures can be achieved by using dampers embedded within cut outs of the shear wall. This is a novel method of seismic control and the feasibility of this approach has been considered and simply demonstrated for several cases. A strategy for protecting buildings from earthquakes is to limit the tip deflection, which provides an overall assessment of the seismic response of the structure. Different building structures require different damping systems for the best results. However, the present study demonstrated that some trends common for all investigated structures can be observed. To this end, findings of the present study revealed that:

- VE dampers are most effective when placed in the highest storeys.
- Friction dampers are most effective when placed close to regions of maximum inter-storey drift
- Diagonal dampers experienced highest sensitivity to placement and variations in seismic excitations. These dampers achieved the most significant performances under earthquakes, which caused high deflection

This study has shown that it is possible to achieve seismic mitigation, under all earthquake excitations, for all the structures considered in this study, by using appropriate damper types suitably located within the structure.

In order to control the vibration response of the medium and high rise structures during earthquake events, passive dampers as energy absorption devices are mostly used. There have been several studies undertaken to develop a method, which optimizes the use of energy dissipating dampers in vibration control of buildings under earthquake loads. However, the basic theories behind these methods are mostly not supporting each other and in many ways are rather contradicting. Even more, there are numerous types of dampers available commercially as well as numerous types of high-rise buildings with varied properties, which could be treated under seismic loads. In the light of this, there was a great necessity for further development of methods to determine the effective use of dampers in medium and high rise structures.

Despite the availability of sophisticated computer facilities, determining the type of damping devices and their optimal placement and size still remains highly an iterative trial and error process. What makes the problem even more difficult is the uncertainty of seismic inputs as the forces of nature can vary tremendously. The range of the results presented in this study illustrates the complexity of the problem of optimization in the use of damping devices.

The following are suggestions for further research in this area:

- The method of optimizing the location of the dampers within the structure be further investigated.

- The study is better to be extended by involving the other toggle configuration proposed by the other authors study.
- Investigation of performances of the damping systems under synthesized excitations with a wide range of frequencies and peak ground accelerations
- Extend the study on use of semi-active damping systems. These are designed to alter the properties to suit the intensity and frequency content of the earthquake, in order to obtain more efficient performance.

## **References**

Abbas, H. and Kelly, J. M. (1993), "A Methodology for design of viscoelastic dampers in earthquake-resistant structures," *Report No. UCB/EERC 93/09*, Earthquake Engineering Research Center, University of California at Berkeley, Berkeley, CA., USA.

Ahlawat, A.S. and Ramaswamy, A. (2000), "Optimum design of hybrid mass damper system for vibration control of MDOF structures," *14<sup>th</sup> Engineering Mechanics Conference of ASCE*, Austin TX., USA.

Aiken, I.D., Kelly, J.M. and Mahmoodi, P. (1990), "The application of VE dampers to seismically resistant structures." *4th U.S. National Conference on Earthquake Engineering*, Palm Springs, CA. USA, Vol. 3, Pages 459-468.

Amiri, G.G. and Dana, F.M. (2005), "Introduction of the most suitable parameter for selection of critical Earthquake", *Computers & Structures*, Vol. 83, No. 8-9, Pages 525-670.

Ashour, S.A. and Hanson, R.D. (1987), "Elastic seismic response of buildings with supplemental damping", *Report No. UMCE 87-1*, University of Michigan, Ann Arbor, MI., USA.

Aydin, E., Boduroglu, M.H., and Guney, D. (2007), "Optimal damper distribution for seismic rehabilitation of planar building structures", *Engineering Structures*, Vol. 29, Pages 176–185.

Balendra, T., Lam, N.T.K., Perry, M.J., Lumantarna, E. and Wilson, J.L. (2005), "Simplified displacement demand prediction of tall asymmetric buildings subjected to long-distance earthquakes", *Engineering Structures*, Vol. 27, Pages 335-348.

Bhaskararao, A.V. and Jangid, R.S. (2006), "Seismic analysis of structures connected with friction dampers", *Engineering Structures*, Vol. 28, Pages 690-703.

Bhatti, M.A. and Pister, K.S. (1981), "A Dual Criteria for Optimal Design of Earthquake-Resistant Structural Systems," *Earthquake Engineering and Structural Dynamics*, Vol. 9, Pages 557-572.

Boller, C., Chang, F.K. and Fujino, Y. (Eds.).(2009), "Encyclopedia of Structural Health monitoring", *Wiley Inter Science*, NJ., USA.

Chang, K.C., Soong, T.T., Lai, M.L., and Nielsen, A. (1993), "Viscoelastic dampers as energy dissipation devices for seismic applications," *Earthquake Spectra*, Vol. 9, No.3, Pages 371-388.

Chang, K.C., Soong, T.T., Oh, S.T. and Lai, M.L. (1992), "Effect of ambient temperature on viscoelastically damped structure", *Journal of Structural Engineering*, Vol. 118, No. 7, Pages 1955-1973.

Cherry, S. and Filiatrault, A. (1993), "Seismic response control of buildings using friction dampers", *Earthquake Spectra*, Vol.9, Pages 447-466.

Christopoulos, C. And Filiatrault, A. (2006), "Principle of Passive Supplemental Damping and Seismic Isolation", *IUSS Press*, University of Pavia, Pavia, Italy.

Clough. R.W. and Penzien, J. (1995), "Dynamics Of Structures", 3rd edition. *Berkeley, CA., USA.*

Elnashai A.S., Sarno L.D. (2008), "Fundamentals of Earthquake Engineering", *A John Wiley & Sons, Ltd Publication*, New York, NY., USA.

Goel, S.C., Hanson, R.D. and Wight, J.K. (1989), "Strengthening of existing buildings for earthquake survival", *Lessons Learned from the 1985 Mexico Earthquake*, Ed. Bertero, V.V., EERI, Pages 166-171.

Harada, H., Ishii, M., Yamane, T. and Kobori, T. (2005), "A study on dynamic behavior of passive energy dissipation systems based on seismic observation records, Part 1", *9th World Seminar on Seismic Isolation, Energy Dissipation and Active Vibration Control of Structures*, Kobe, Japan.

Hahn, G.D. and Sathivageeswaran, K.R. (1992), "Effects of added-damper distribution on the seismic response of buildings", *Computers & Structures*, Vol. 43, No. 5, Pages 941–950.

Hart, G.C., Fai, K.K. and Wong, F. (2000), "Structural Dynamic for Structural Engineers", *John Wiley and Sons*, New York, NY., USA.

Hosseini, M., Noroozinejad Farsangi, E.. (2012), "Telescopic columns as a new base isolation system for vibration control of high-rise buildings" *Journal of Earthquakes and Structures*, Vol. 3, No. 6, Techno Press.(In Press).

J'armai, K., Farkas, J. and Kurobane, Y. (2006), "Optimum seismic design of a multi-storey steel frame", *Engineering Structures*, Vol. 28, Pages 1038– 1048.

Kasai, K., Fu, Y. and Watanabe, A. (1998), "Passive control systems for seismic damage mitigation", *Journal of Structural Engineering*, Vol. 124, No. 5, Pages 501-512.

LUSAS Software Manual, 2004.



Marko, J., Thambiratnam, D.P. and Perera, N.J. (2009), “Study of passive dampers configurations in the seismic mitigation of structures”, *Journal of Mechanics of Materials and Structures*, Vol. 2, No. 7, Pages 1021-1049.

Pong, W.S., Tsai, C.S. and Lee, G.C., (1994), “Seismic study of building frames with added energy-absorbing devices”, *Report No. NCEER 94-0016*, National Center for Earthquake Engineering Research, University of New York at Buffalo, Buffalo, NY, USA.

Shen, K.L. and Soong, T.T. (1995), “Modeling of viscoelastic dampers for structural applications”, *Journal of Engineering Mechanics*, Vol. 121, No. 6, Pages 694-700.

Shukla, A.K, Datta, T.K, (1999), “Optimal use of viscoelastic dampers in building frames for seismic response”, *Journal of Structural Engineering*, Vol. 125, No. 4, Pages 401– 409.

Singh M.P., Moreschi, L.M. (2000), “Optimal seismic design of building structures with friction dampers”, *US–China Millenium Symposium on Earthquake Engineering*, Beijing, China.

Soong, T.T. and Dargush, G.F. (1997), ”Passive Energy Dissipation Systems in Structural Engineering”, *John Wiley & Sons*, Chichester, UK.

Takewaki, I. (1997), “Optimal damper placement for minimum transfer functions”, *Earthquake Engineering & Structural Dynamics*, Vol. 26, No. 11, Pages 1113–1124.

Takewaki, I. (2009), “Building Control with Passive Dampers: Optimal Performance-Based Design for Earthquakes”, *John Wiley & Sons Ltd. (Asia)*, Singapore.

Trombetti, T. and Silvestri, S. (2004), “Added viscous dampers in shear-type structures: The effectiveness of mass proportional damping”, *Journal of Earthquake Engineering*, Vol. 8, No. 2, Pages 275–313.

Yamamoto, K., Fujita, K., and Takewaki, I. (2010), “Optimization in damper placement for interstory-drift control of structures”, *1<sup>st</sup> International Conference on Advances in Interaction and Multiscale Mechanics (AIMM’10) Jeju, Korea*, Pages 321–329.

Zhang, R.H. and Soong, T.T. (1992), “Seismic design of viscoelastic dampers for structural applications”, *Journal of Structural Engineering*, ASCE, Vol. 118, No. 5, Pages 1375–1392.

Zienkiewicz, O.C. and Taylor, R.L. (2005), “The Finite Element Method for Solid and Structural Mechanics”, Sixth ed., *Elsevier*, Oxford, UK.