

Predicting Reservoir or Non-Reservoir Formations by Calculating Permeability and Porosity in an Iraqi Oil Field

Luay Ahmed Khamees*, Farah Nabeel Abdulrazzaq, Jasim Ibrahim Humadi **



- 1. Department of Petroleum and Gas Refining Engineering, College of Petroleum Processes Engineering, Tikrit University, Iraq. E-mail: luaykhamees75@tu.edu.iq
- 2. Department of Petroleum Engineering, College of Engineering, Basrah University. E-mail: farah.nabeel@uobasrah.edu.iq
- 3. Department of Petroleum and Gas Refining Engineering, College of Petroleum Processes Engineering, Tikrit University, Iraq. E-mail: jasim_alhashimi_ppe@tu.edu.iq

ARTICLE INFO	ABSTRACT
<p>Article History: Received: 09 November 2023 Revised: 30 December 2023 Accepted: 13 January 2024</p> <p>Article type: Research</p> <p>Keywords: Effective Porosity, Identifying Reservoir Formations, Permeability, Southern Iraq, Yamama Formation</p>	<p>This study is focused on identifying the formations, whether are they reservoir formations or not. The effective porosity and permeability evaluating of the oil reservoir is the most important methods to recognize the formations. In this study, the effective porosity and permeability of the Yamama formation in an oil field of southern Iraq can be calculated by applying, the neutron-density and the sonic logs. The calculated effective porosity of the formation ranged between (6%-17%), and the porosity in the joints was less than (0.04). The permeability in Yamama Formation calculated by three methods: Timur, Morris Biggs oil, and Schlumberger methods. By comparing the values of the permeability calculated by these methods, it was found that the methods of Timor and Schlumberger gave the same results, and also when the permeability calculated by these methods compared with the permeability of the cores, the method of Timur and Schlumberger closer than the results of the cores. So, the Schlumberger and Timor method is the one used in calculating the permeability. The permeability values for most of Yamama formation range from: 0.1 -10 md, and the permeability in the joints was less than 0.001 md.</p>

Introduction

The importance of calculating the effective porosity and permeability of reservoir formations is not hidden from the reservoir engineering specialist, and the danger of error in calculating the porosity and permeability of the formation is not hidden from the reservoir engineering specialist, as calculating the amount of hydrocarbons in the formation depends on calculating the porosity and permeability, and also calculating the oil reserve is greatly affected by the porosity values. Effectiveness and permeability, as there is inaccuracy in calculating them; It will give wrong values for the oil reserves in the formation, and thus the decision will be affected by whether the oil in the formation is economic or uneconomic, and thus the decision will be affected by whether to start drilling production wells in this formation or to

* Corresponding Authors: L. Ahmed Khamees, J. Ibrahim Humadi (E-mail address: luaykhamees75@tu.edu.iq, jasim_alhashimi_ppe@tu.edu.iq)





stop. Considerable efforts have been paid toward determination of the effective porosity and permeability in any formation [1]; This is due to the importance of the effective porosity and permeability of the formation to identify the type of rocks. Finding the hydrocarbons in reservoir rocks points out these rocks have good effective porosity and good permeability [2]. However, hydrocarbons can be presented in the pores and move through good permeability [3]. One most important factor that greatly affects the values of effective porosity and permeability is the volume of the shale [4]. When the percentage of oil shale in the reservoir rocks is low, the effective porosity and permeability of these rocks are good, and vice versa [5]. It is also important to know the type of lithology, as the type of lithology is very important in reservoir studies and through it it is possible to predict whether the rocks have porosity and permeability that allow fluids to pass through them or not [6]. The values of porosity and permeability are varied according to the lithology of the formation whether it is sandstone, limestone, or dolomite [7].

The concerned porosity for the reservoir engineer is the effective porosity [1]; in which the voids inside the rocks are classified into two types [8] connected and unconnected voids. The effective porosity is the continuous voids in which the hydrocarbons reside and move [9]. There are several methods to determine the effective porosity [10]. The first one is by cores, which is the best and most accurate method [11]. However, due to high cost of this method and the cores are taken to very few depths, It cannot be applied to determining the porosity and the permeability [11]. The second and the most important methods to calculate the porosity is the well logs [12], in which the sensor used to calculate porosity are: Neutron, Density, and Sonic logs [13]. Porosity is classified into two types: Primary porosity, which is the porosity developed during the time of deposition, such as sandstone [14]. The second type is secondary porosity that can be formed after sedimentation, as in carbonate rocks, which tend to form secondary porosity. Moreover, the porosity can be classified into total porosity and effective porosity [15]. Total porosity is the obtained porosity from all the pores (interconnected and isolated) in the rock [16]. Effective porosity can be defined as the porosity that can be obtained from the interconnected pores (without the effects of oil shale).

This porosity is concerned in study [17], in which the voids are connected within the rocks, and can produce hydrocarbons from oil formations at the good value of the porosity. This is due to the connected voids in the rocks allow hydrocarbons to pass through these rocks, which is called permeability. Permeability is directly proportional to the effective porosity [18], high values of the effective porosity leads to high permeability. Hence, the hydrocarbons will move through the rocks toward the bottom of the drilled [19]. One of the important issue that the reservoir engineer must recognize is to determine the value of the neglected effective porosity (porosity cut-off) [20], and the value of the good and acceptable effective porosity in oil reservoirs [21]. Porosity is an important rock property because it is a measure of the potential storage volume of hydrocarbons [22]. Porosity in carbonate reservoirs ranges from 1 to 35% and averages 10% in dolomite reservoirs and 12% in limestone reservoirs. Permeability is also important factor because it is a rock property that related to the rate in which hydrocarbons can be recovered. The values are considerably ranged from less than 0.01 millidarcy (md) to well over 1 darcy. A permeability of 0.1 md is generally considered as the minimum value for oil production. Highly productive reservoirs commonly have permeability values in the Darcy range [23]. Determining the characteristics of rocks in terms of oil shale [4], porosity, hydrocarbon saturation, lithology [6], and permeability are the most important factors that a reservoir engineer is keen to know. By defining these characteristics, the primary oil present can be calculated and the oil reserve can be calculated as well [24]. There are numerous studies that have been concerned with calculation of the effective porosity and permeability, but this study reveals only the studies reveal only the concerned studies with calculating the effective

porosity and permeability in the Yamama Formation - southern Iraq. Al-Sudani et al. studied petrophysical properties estimation of Yamamah Reservoir in Nasiriyah Oilfield. this study; the calculated values of porosity were not compared with the porosity calculated from the analysis of the cores. In addition, the shapes that show the relation of the porosity with depth were not included and it also didn't explain the detailed methods of calculating the effective porosity was calculated not mentioned. the permeability values mentioned in this study were only the values obtained from the analysis of cores [23]. Handhal et al. studied Petrophysical Properties of Mishrif and Yamama Formations at selected oil fields, in south Iraq. The well log used in this study to determine rock properties, including effective porosity, but it did not compare the calculated values of the effective porosity with the effective porosity calculated from cores analysis [25]. Al-Jawad et al. studied flow units and rock type for reservoir characterization in a carbonate reservoir at the case of Yamama Reservoir in the south of Iraq (Ratawi Field) [26]. Al-Aani et al. investigated the geological model construction for Yamama Formation at Faihaa Oil Field- South of Iraq. Petrel software has been used in this study to explain the distribution of petrophysical properties (shale volume, effective porosity, and hydrocarbon saturation) by construction of 3D geological model for Yamama Formation. Several methods were used to identify and characterize the flow units and type of rocks within the main reservoir, including: Porosity– water saturation relationship, flow zone indicator (FZI) method, capillary pressure analysis, and Porosity–Permeability relationship (R35), cluster analysis method, capillary pressure curves and cluster analysis methods. Finally, Ali et al. studied petrophysical properties of the Yamama Formation in Siba Oilfield [27].

In this study, Techlog software is used without displaying the comparison of the calculated effective porosity from this study with the porosity calculated from the analysis of the cores. Also, the permeability was calculated in the FZI method, and no comparison was made between the permeability calculated in this way and the permeability calculated from the analysis of the cores. This study is distinguished from all previous studies by considering very important factors. Firstly: A study specialized in calculating the effective porosity and permeability only and only for the formation of the Yamama . Secondly, it was used to calculate the porosity by more than one method (density log, neutron log, and sonic log) and after calculating the porosity by these methods, they were compared and the effective porosity was calculated using them. The study was not limited to that only, but the effective porosity calculated by these methods was compared with the effective porosity calculated through the analysis of the core. Hence, the accuracy of these calculations can be identified through this comparison. As for calculating the permeability, this was done using methods that were not used in all previous studies. The methods used in this study to calculate the permeability are: Timur, Schlumberger, and Morris biggs oil methods. All calculated values of the permeability from each above method are compared with the permeability calculated through the analysis of the core in order to determine which methods are more accurate in terms of results to adopt it in this configuration.

Fig. 1 shows area of study location which obtained from Oil Exploration Company, Iraqi Ministry of Oil. Fig. 2 shows contour map top of Yamama – South Iraq oil field which obtained from the same company. Fig. 3 show contour map top of Yamama – South Iraq oil field [28]. Fig. 4 show sequence stratigraphy in southeastern Iraq [29].

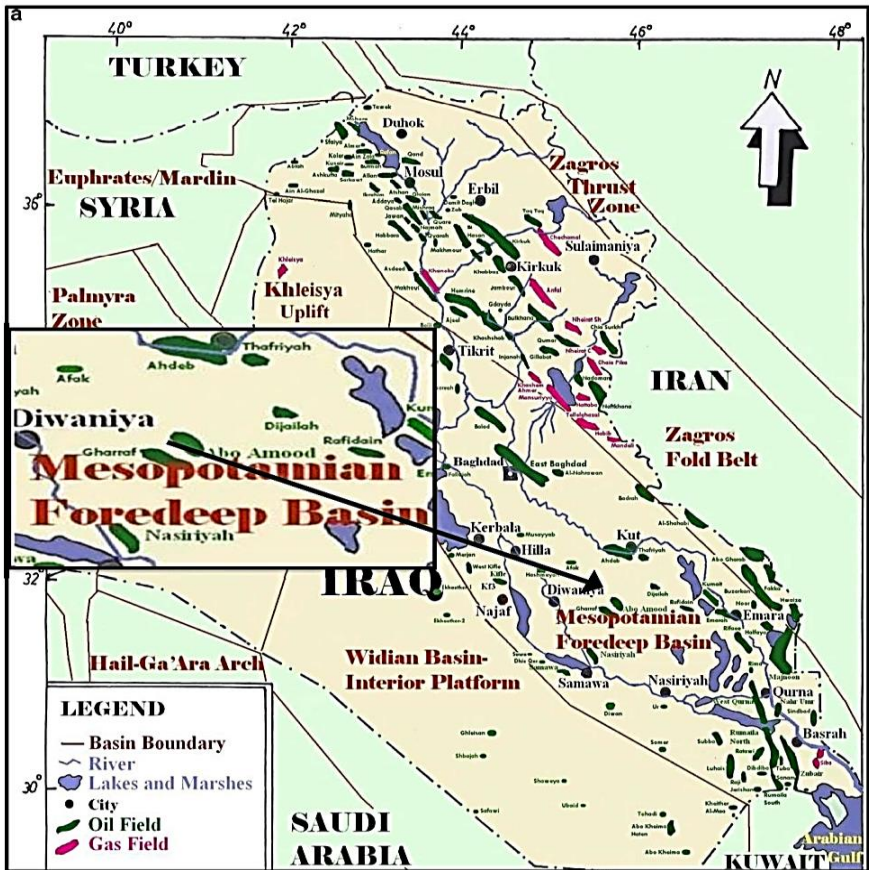


Fig. 1. Area of study location

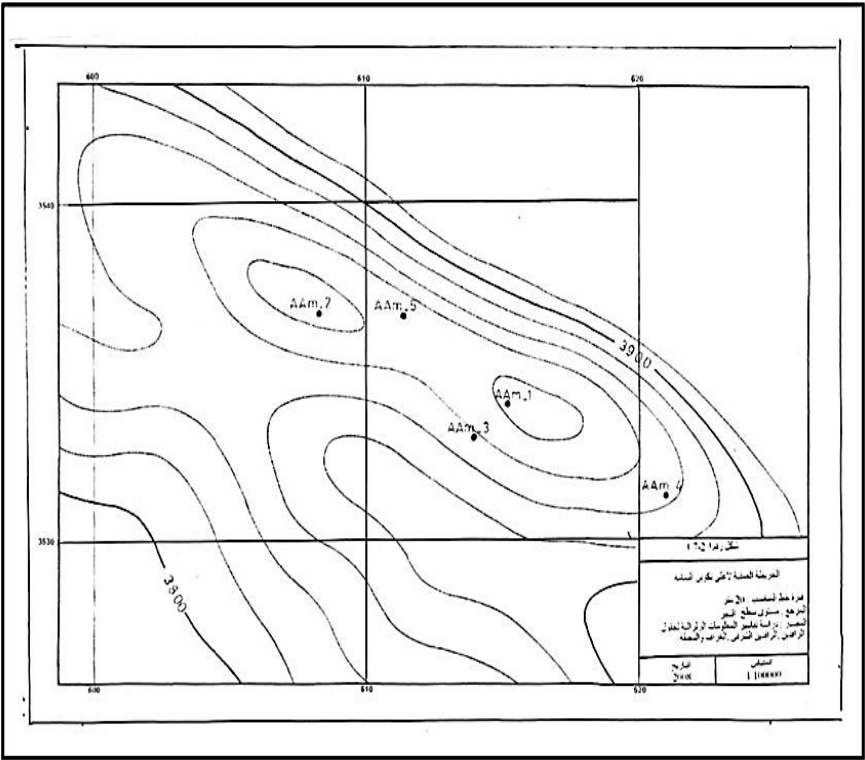


Fig. 2. Contour map top of Yamama – South Iraq oil field

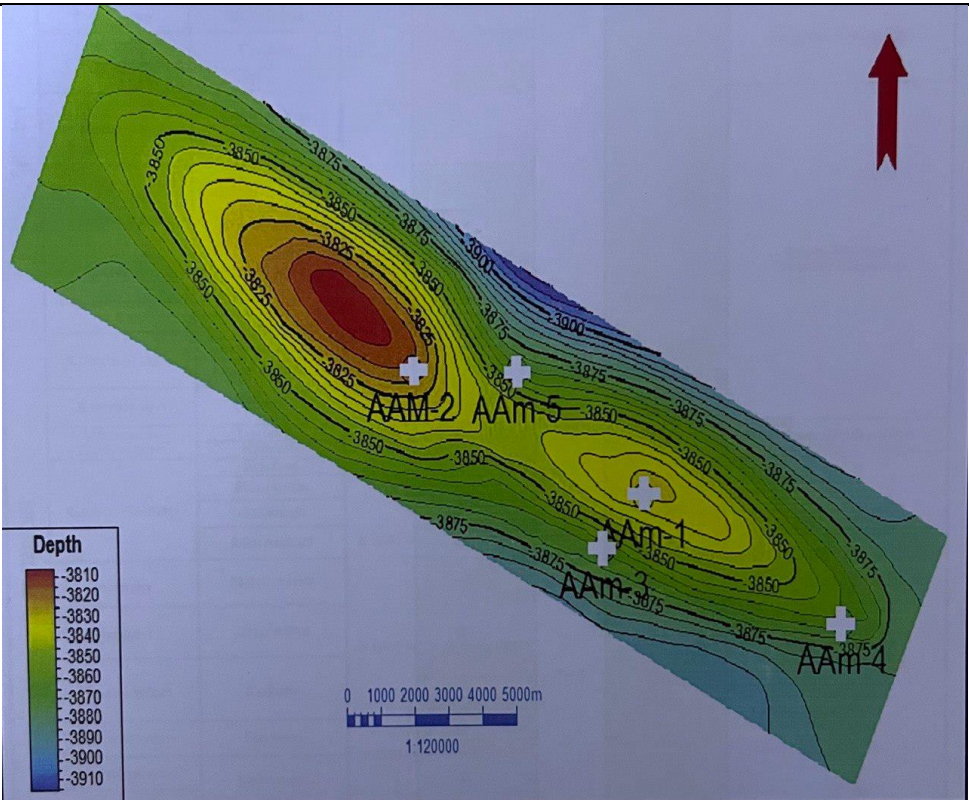


Fig. 3. Contour map top of Yamama – South Iraq oil field

PERIOD	EPOCH	FORMATION NAME	DEPTH (M.)	LITHO- LOGY	LITHOLOGICAL DESCRIPTION
TERTIARY	MIOCENE	UPPER	upper fars		Lst., Sft., Pyr., chk., w. Mrl. Cist., sft., S., w. Mrl., w. Gyp.
		MIDDLE	Lower fars		Anhd., Sft. hd., mass. w., Mrl., Sft., and Lst. anhd.
		LOWER			Sst., Sft., w. Grv., and Strk of Lst., chk.
	OLIGOCENE		1189		Lst., Sft., S., Chk., dol.
			1219		Lst., Sft., w. Mrl. glc., anhd.
			1281		Lst., Sft., Pyr., chk., w. Mrl.
	EOCENE- PALEOCENE		1336		Mrl., Sft., glc.
		Dammam	1467		Dol., foss., w. Lst., arg.
		Rua/Umm Er Radhuma	1628		Dol., mass., foss., mod. hd. anhd. w. cht.
		Aaliji			Lst., Sft., chk., w. Mrl., Sft., glc.
CRETACEOUS	UPPER		1976		Mrl., Sft., w. Bd. of Lst., chk.
		Shiranish	2033		
		Hartha	2172		Lst., foss., chk., comp.
		Sadi	2321		Lst., Sft., hd., chk., foss., w. Mrl. Sft. at the top
		Yanuma	2373		Mrl., Sft., pasty, w. Sh. fiss.
		Khaib	2431.5		Lst., Sft., chk., foss., arg.
		Mishrif			Lst., mod. hd., comp., foss., arg.
	LOWER		2725		Lst., comp., chk., arg.
		Rumalla	2781		Sh., fiss., w. Mrl.
		Anmadi	2799		Lst., foss., chk., hd. comp., arg.
		Mauddud	3045		Sst., fri. w. sh., weakly fiss., w. Lst. mod. hd. comp. at the top
		Nahr Umr	3182.5		Dol., anhd. w. strk. of Lst. Sft. mod. hd. comp.
		Shuaiba	3294		Sh., fiss., w. Sst., arg., stly., Calc., w. Streak of Lst. stly. hd., comp. party chk.
		Zubair			
			3703		Sh., fiss., w. Sst., calc. w. Lst. mod. hd. comp. at the top
JURASSIC	UPPER		3885		Lst. mod. hd., pyr., comp., foss., frac., Styl.
		Yamama	4118		Lst. mod. hd., arg., comp., w. Lst. Sft., chk.
		Sulaib	4375		
		Gotnia	4626		Anhd. comp., mass., w. Salt and Lst. comp. at the top
		Najmah	4702		Lst., mod. hd., arg., foss.

Fig. 4. Sequence stratigraphy in southeastern Iraq



Methods and Theory

Methods

The first step in this study is the digitization of the well log using Neuralog software. After that, the interactive petro physical (IP) program was applied for the petro physical study by integrating all the available data, especially the cores and the well log. Then the porosity logs were analyzed to get the porosity areas through each log and the results were compared with the base data and then the best one was selected according to the condition [30]. Then the effective porosity calculated by these methods was compared with the effective porosity calculated through cores analysis [31], and the permeability calculated in this study was also compared with the permeability calculated by cores analysis [32].

Theory

Porosity Estimation

There are numerous sensors from which the total porosity and the effective porosity may be calculated, and those sensors are Neutron log, Density Log and Sonic Log. Neutron logs reply frequently to the quantity of hydrogen with inside the formation. The neutron log shows the quantity of liquid that exists in porosity. The neutron log allows us to come across the fuel line sector which is evaluated with different porosity logs or a middle analysis. Also, neutron logs can pick out the lithology of the formation with the aid of using drawing it with any other porosity log. Accurate porosity may be acquired from the mixture of the neutrons log with different porosity logs [33].

Density Log

This log is carried out to compute the electron density of the formation that facilitates figuring out the Porosity and to identify the density of the saved hydrocarbons. Phi-Den: Calculated porosity by Density log. Assessing of sand and rock reservoirs are the main parts of this log to deal as a source of gamma radiation and these two sensors must be located one of them near and the other far. The total density of the formation is measured by the far sensor, while the density of the formation in the invaded area near the well wall is measured by the near sensor in the measuring unit of gm/cm^3 . The Porosity from the Density log is calculated by Eq. 1 [1]:

$$\Phi = \frac{(\rho_{ma} - \rho_b)}{(\rho_{ma} - \rho_f)} \quad (1)$$

where ρ_{ma} is the matrix density, ρ_b is bulk density log reading, and ρ_f is filtrate density.

Sonic Log:

This log measures the transition interval (a transitional sound wave) across one foot of the formation, and it is the inverted velocity [34].

phi-Son:

Calculated porosity by Sonic log. To determine Porosity from the sonic log by applying Eq. 2 [35].

$$\Phi = \frac{(\Delta t - \Delta tma)}{(\Delta tf - \Delta tma)} \tag{2}$$

- Δt transit time in the formation
- Δtma the acoustic transit time of the rock matrix
- Δtf the acoustic transit time of interstitial fluids

Permeability Estimation

Permeability of the porous media is maximum crucial to take the obligation of fluid transmissibility consistent with the variety and uncertainty of its prediction, many empirical techniques had been evolved to expect the fee of permeability from nicely logs, porosity statistics, and irreducible water saturation. Wyllie and Rose generate a technique to expect permeability by referring to a porous medium porosity and its irreducible water saturation, Swi, as shown in Eq. 3 [36]:

$$K= a \frac{\Phi^b}{Swi^c} \tag{3}$$

K: Permeability, md

Φ : Effective porosity.

Swi: Water saturation.

The value of the constant a, b, and c In the Timur method: a = 8581, b = 4.4, c=2

The value of the constant a, b, and c In Morris Bigs oil method: a = 62500, b = 6, c=2

The value of the constant a, b, and c In Schlumberger chart K3 method ⁽⁴¹⁾: a = 10000, b = 4.5, c=2

Results and Discussion

Fig. 5 show the average shale volume of the formation which its value less than 10% according to the gamma-ray log via plots. This is a good indication that the effective porosity values for the formation are high; because the higher the value of the shale volume, the lower the effective porosity values and the presence of the shale in high values closes the connected pores and thus prevents the movement and transfer of hydrocarbons within the rocks. Fig. 5shows that if the reading is high, it means that the volume of shale in the rocks is high, and the reading ranges from zero to one. Zero means that the volume percentage of shale in the rocks is zero, and one means that the volume percentage of shale is one hundred percent. Fig. 5 Shows Vshale-Gamma ray log in well AA-1.

Fig. 6 shows that the reading ranges from 1 to 0.5. The higher the value of the reading and approaching 0.5 indicates that the porosity of the rocks in the formation is high, and the lower the reading and approaching zero indicates that the porosity of the rocks is low. Fig. 6 shows that the effective porosity of the formation ranges between (0.06-0.17) depending on the use of density log, neutron log, and acoustic log. This is a good indication that the formation is a reservoir and the possibility of hydrocarbons gathering within it is strong. The effective porosity in which oil is present in carbonate rocks is 0.06 and above. It also gives an indication that hydrocarbons can move and move through this formation; because the movement of hydrocarbons within the formation depends on good values of effective porosity.

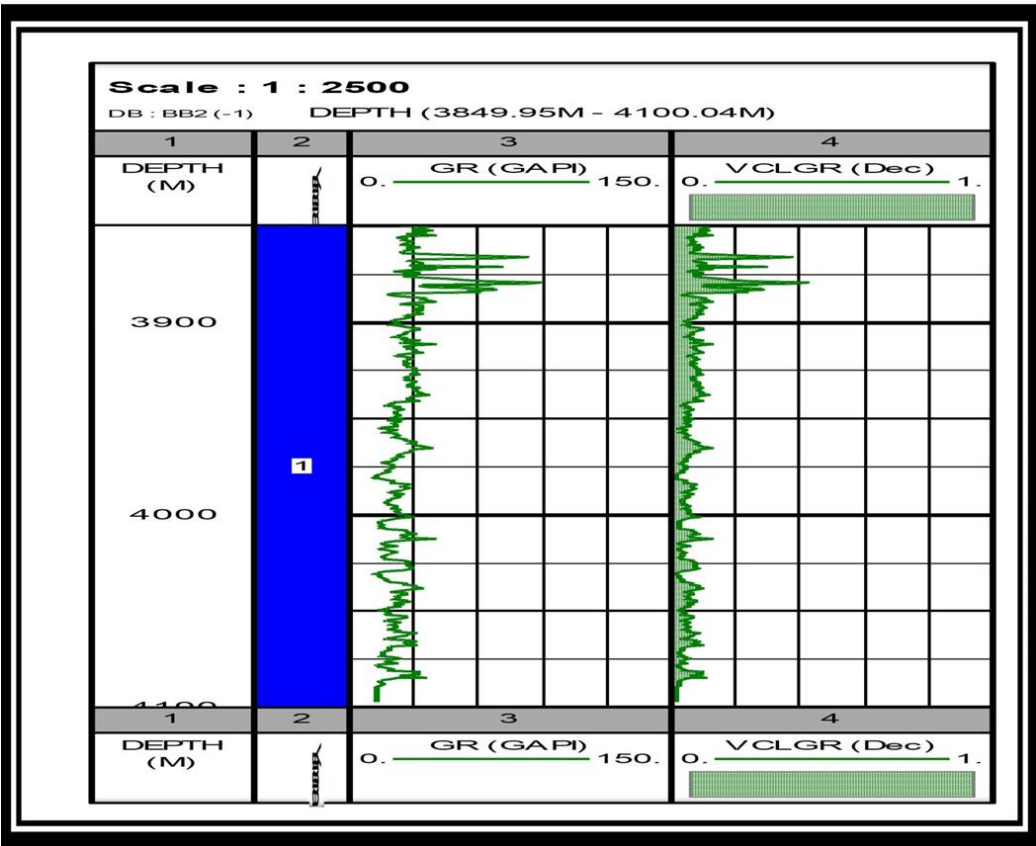


Fig. 5. Vshale-Gamma ray log in well AA-1

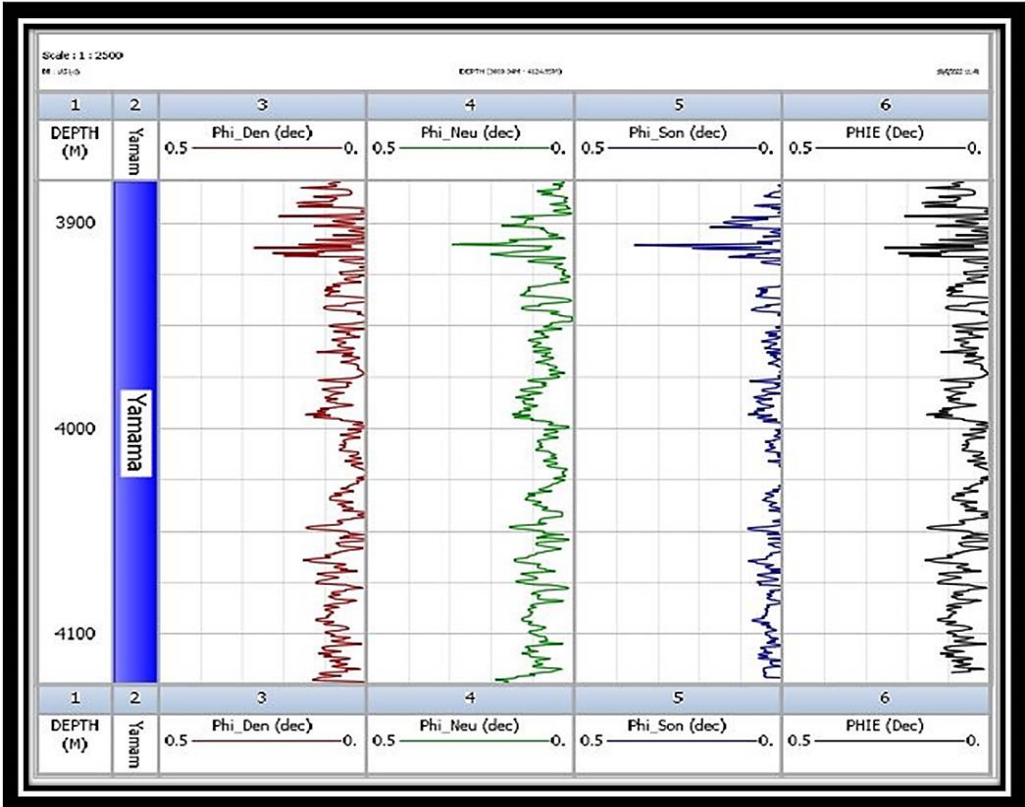


Fig. 6. phi-Den, phi-Neu, phi-Son, and PHIE in well AA-1

Fig. 7 shows that the permeability of the formation ranges between (0.1-10) md according to the use of Timur, Schlumberger, and Morris Biggs oils. These calculated good values of permeability give an indication and evidence that the formation studied is a reservoir formation, and that the possibility of gathering hydrocarbons within its rocks, and the possibility of their movement and movement within the formation is possible. The type of fluids present in the pores of the formation can be determined by calculating the water saturation, oil saturation and gas saturation in the rocks through resistance sensors and applying the Archie equation.

Fig. 7 Shows K-Morris Biggs oil, K-Schlumberger, and K-Timur in well AA-1. Meanings of these symbols are Permeability calculated by Morris method, Biggs method, Schlumberger method, and K-Timur method in well AA-1. The reading ranges from 1 to 1000 milliliters. The higher reading refers to the greater the permeability of the rock, and vice versa.

Fig. 8 shows the comparison between the effective porosity calculated from the cores and the effective porosity calculated from the density log, sonic log, and neutron log. It is clear from the figure that the resolution is high which is consistent to the effective porosity values calculated by the cores. The comparison between the effective porosity values calculated by any method with the effective porosity calculated from the cores analysis is very important, as no calculations are trusted without making this comparison. The accuracy between its results and the results of the cores analysis is as high as possible.

Through this form, the accuracy of the calculations can be known. If the straight line passes through all the points, it indicates that the accuracy is one hundred percent, and if the straight line passes through most of the points but does not pass through some points, it indicates that the accuracy is high, but less than one hundred percent. The further the points are from the straight line, the lower the accuracy.

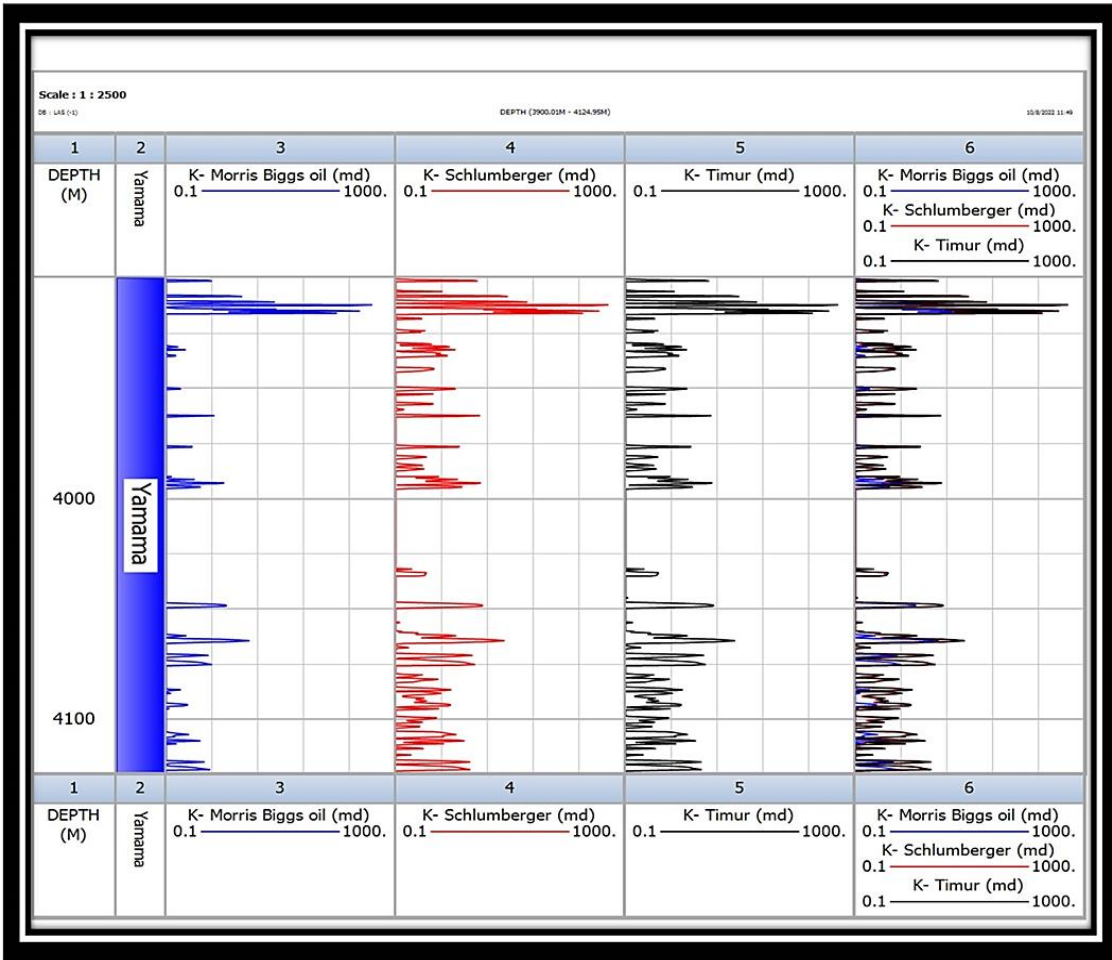


Fig. 7. Shows K-Morris Biggs oil, K-Schlumberger, and K-Timur in well AA-1

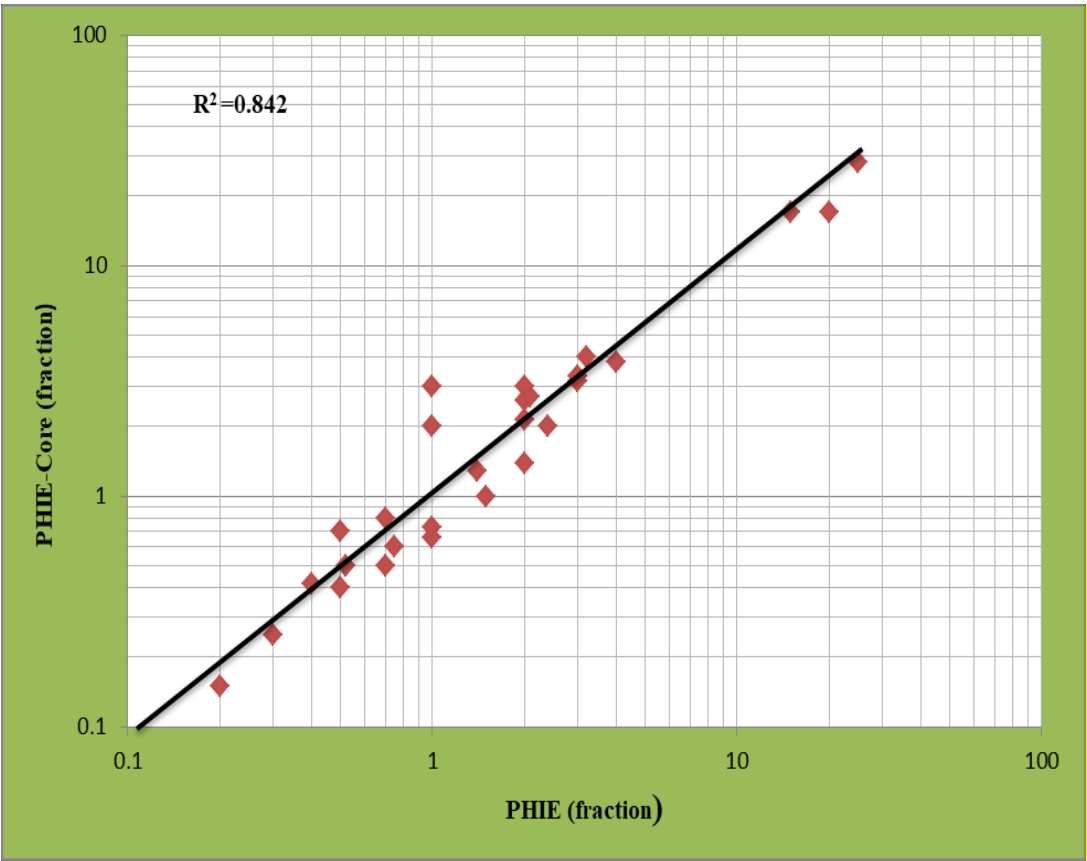


Fig. 8. Accuracy of porosity by well logging in well AA-1

Fig. 9 shows the comparison between the permeability calculated from the cores and the permeability calculated by Schlumberger method and Timor method. It appears from the figure that the accuracy ratio is high, which is consistent to the transmittance values calculated by the cores. Thus, these two methods can be chosen to calculate the transmittance in this configuration. It does not depend on the Morris Beggs oil method because the accuracy rate in the Morris Beggs oil method is low, and this means that the error rate in the calculations is large. Through this form, the accuracy of the calculations can be known. If the straight line passes through all the points, it indicates that the accuracy is one hundred percent, and if the straight line passes through most of the points but does not pass through some points, it indicates that the accuracy is high, but less than one hundred percent. The further the points are from the straight line, the lower the accuracy.

Fig. 10 shows the comparison between the permeability calculated from the cores and the permeability calculated by Morris Beggs oil method. It is clearly notice from the above figure that the accuracy ratio is low, whilst the error rate in the transmittance values calculated in this way is large; This is due to the calculated values of the transmittance can be further to the computed transmittance values from Cores analysis which means the error rate in these calculations is high. Whilst when the calculated transmittance values are consistent to the calculated transmittance values from the fundamental analysis, the calculation error rate will be low.

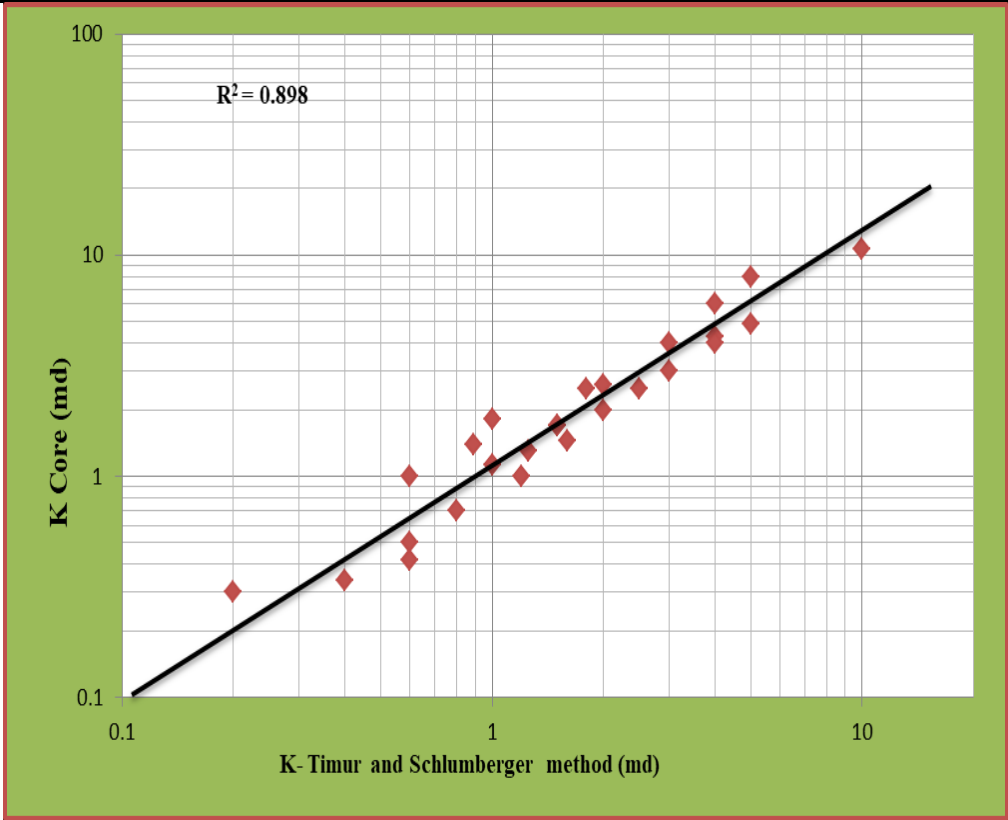


Fig. 9. Accuracy of permeability by Timur and Schlumberger method

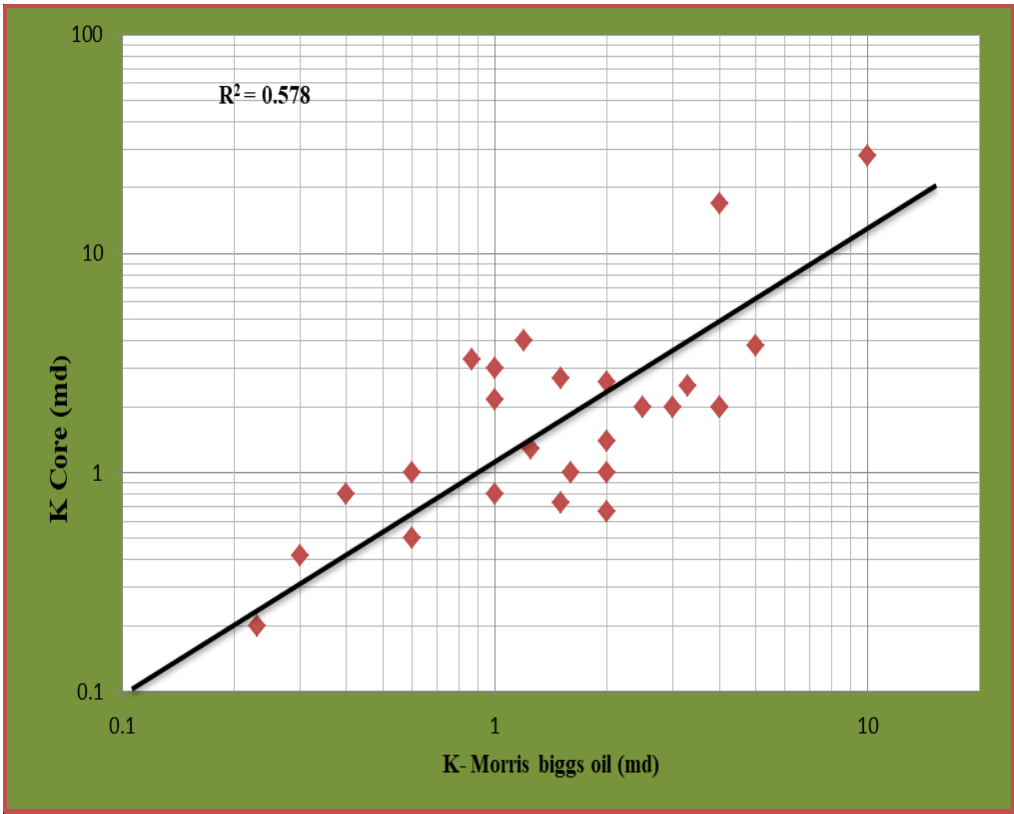


Fig. 10. Accuracy of permeability by Morris biggs oil method

The next investigation is to compare the results of this study with those of previous studies Al-Sudani which the effective porosity and permeability of the Yamama formation has been calculated in southern Iraq. The value of the effective porosity and permeability, respectively: (0.12 - 0.14 md), (2.921 - 5.639 md). These values are close to the results of this study, bearing



in mind that the three-dimensional method was used. The advantage of this study is that the effective porosity was calculated using the Neutron log, Density log, and Sonic log, and the results were compared with cores analyzes and they were very close, and the permeability was calculated using the Morris biggs oil method, Timur method, and Schlumberger method. When comparing the permeability calculated by these methods with the permeability calculated by cores analyzing; The Timur and Schlumberger method was the closest to the Cores results, which gives an indication of the accuracy of calculating the permeability by this method. Handhal et al. (2019) calculated the effective porosity of Yamama formation in southern Iraq, and the value of the calculated effective porosity was: (0.06-0.14)[37]. Al-Ani et al. (2021) calculated the effective porosity of Yamama formation in southern Iraq, and the value of the calculated effective porosity was: (0.08-0.16). The effective porosity value calculated in this study ranges between (0.06-0.17) [38]. This indicates that the effective porosity results calculated from this study are very close to the effective porosity values of the previous studies.

Conclusion

The results of this study indicate that the porosity of the Yamama formation ranges between (0.06-0.17) and these results were obtained by applying the density log, neutron log, and acoustic logarithm. These effective porosity values are acceptable because when compared to the core value, it was close to it, and the error rate was very small. Also, when comparing these values calculated in this study with the values calculated in previous studies; The results were very close. This study also showed that the value of the permeability of the Yamama formation ranges between (0.1-10) md, and these values were calculated by Schlumberger and Timor method after comparing them with the permeability of the cores, and they were close to it. Considering the values of both the porosity and the permeability calculated for the formation, it is clear that the formation rocks are reservoir rocks and they are capable of saturating with hydrocarbons due to connected pores (effective porosity) and they have a good ability for fluids to pass through them (permeability) .After this study, we can predict that the Yamama formation is a reservoir formation, and in order to know the saturation of the rocks of this formation with water, oil and gas, we need to calculate the water saturation of the rocks of this formation using resistance sensors and using the Archie equation. After knowing the water saturation, it is possible to determine the saturation of the rocks with oil and gas. It is known in reservoir engineering that, in order for the formations to be oil reservoirs, they must have high permeability in order to allow the movement of oil through the formation, and from the formation to the bottom of the well. However, in gas reservoirs, the permeability in them is not required to be as high as the permeability in oil wells. Because gas can move through a permeability where oil cannot move.

Acknowledgement

This research is supported by Department of Petroleum and Gas Refining Engineering, College of Petroleum Processes Engineering, Tikrit University, Iraq.

Nomenclatures

Symbol	Definition	Unit
Vshale	Shale volume.	(-)
Pma	The matrix density	gm/cc
ρb	bulk density log reading	gm/cc

ρ_f	filtrate density	gm/cc
Δt	transit time in the formation	$\mu\text{sec/ft}$
Δt_{ma}	the acoustic transit time of the rock matrix	$\mu\text{sec/ft}$
Δt_f	the acoustic transit time of interstitial fluids	$\mu\text{sec/ft}$
well AA-1	well in the fields of southern Iraq	(-)
Phi- Den	Calculated porosity by Density log	(-)
phi-Neu	Calculated porosity by Neutron log	(-)
phi-Son	Calculated porosity by Sonic log	(-)
PHIE	Effective porosity	(-)
K-Morris Biggs	Permeability calculated using Morris Biggs	md
oil	oil method	
K-Schlumberger	Permeability calculated using Schlumberger	md
	method	
K-Timur	Permeability calculated using Timur method	md
K	Permeability	md
Φ	porosity	(-)
Swi	water saturation, fraction	(-)

References

[1] Neamah AK, Al-Khafaji AJ, Al-Sadooni FN. Evaluation of Petrophysical Characteristics of Mishrif and Yamama Reservoirs, in Garraf Oil Field, Southern Iraq, Based on Well-Logging Interpretation. Iraqi Journal of Science. 2022;1115-28. doi:10.46717/igj.55.2E.8ms-2022-11-22.

[2] Al-Baldawi BA. Evaluation of petrophysical properties using well logs of Yamama Formation in Abu Amood oil field, southern Iraq. The Iraqi Geological Journal. 2021;67-77. doi:10.46717/igj.54.1E.6Ms-2021-05-27.

[3] Gharib AF, Özkan AM. Reservoir Evaluation of the Tertiary Succession in Selected Wells at Ajeel Oilfield, Northern Mesopotamian Basin, NE Iraq. Arabian Journal of Geosciences. 2022;15(12):1147. doi:10.1007/s12517-022-10419-5.

[4] Khamees LA, Alrazzaq AAAA, Humadi JI. Different methods for determination of shale volume for Yamama formation in an oil field in southern Iraq. Materials Today: Proceedings. 2022;57:586-94. doi:10.1016/j.matpr.2022.01.455.

[5] Ali HY, Farman GM, Hafiz MH. Study of Petrophysical Properties of the Yamama Formation in Siba Oilfield. The Iraqi Geological Journal. 2021;39-47. doi:10.46717/igj.54.2C.4Ms-2021-09-23.

[6] Khamees LA, Alrazzaq AAAA. WITHDRAWN: Different methods for lithology and mineralogy recognition. 2021. Elsevier. doi:10.1016/j.matpr.2021.04.531.

[7] Aziz QAA, Hussein HAA. Development a Statistical Relationship between Compressional Wave Velocity and Petrophysical Properties from Logs Data for JERIBE Formation ASMARI Reservoir in FAUQI Oil Field. Iraqi Journal of Chemical and Petroleum Engineering. 2021;22(3):1-9. doi:10.31699/IJCPE.2021.3.1.

[8] Kumar R, Ramana JV, Singh D, Kumar V. Radial basis collocation method for free vibration analysis of elastically supported porous bi-directional FGM plate under various types of porosity distribution. Advances in Materials and Processing Technologies. 2023;9(2):368-90. doi:10.1080/2374068X.2022.2093003.

[9] Sitaresmi R, Suherman S, Satrio LW, Rony P. Determining of Formation Water Saturation To Estimate Remining Hydrocarbon Saturation in the X Layer Y Field. PETRO: Jurnal Ilmiah Teknik Perminyakan. 2019;8(3):119-25. doi:10.25105/petro.v8i3.5514.

[10] Xiao K, Yang J, Chen D, Zhou H, Zhang Z, Hu Q. Anisotropy of the effective porosity and stress sensitivity of coal permeability considering natural fractures. Energy Reports. 2021;7:3898-910. doi:10.1016/j.egyr.2021.06.067.

[11] Zhang Z, Yao Y, Liu D, Liu J, Cai Y, Li J. Permeability and porosity prediction using logging data in a heterogeneous dolomite reservoir: An integrated approach. Journal of Natural Gas Science and Engineering. 2021;86:103743. doi:10.1016/j.jngse.2020.103743.



- [12] Sridi A, Bessaha H, Boutaleb S, Ayoub Z, Elkatatny S. Porosity and Permeability Prediction in Triassic Reservoirs of HassiR'mel Field (Algeria) from Well Logs Data Using Fuzzy Logic. In: Conference of the Arabian Journal of Geosciences. 2019. Springer. doi:10.1007/978-3-030-73026-0_63.
- [13] Gomaa S, Elkatatny S, Abdelrahman M, Mahmoud M, Dahab A, AlDhamri H. New correlation for calculating water saturation based on permeability, porosity, and resistivity index in carbonate reservoirs. ACS omega. 2022;7(4):3549-56. doi:10.1021/acsomega.1c06044.
- [14] Sharifi J, Saberi M. Quantitative evaluation of fracture porosity in a carbonate reservoir using analytical method. In: 83rd EAGE Annual Conference & Exhibition. 2022. European Association of Geoscientists & Engineers. doi:10.3997/2214-4609.202210135.
- [15] Promoppatum P, Toh CK, San Wong C, Poulat S. Quantification and prediction of lack-of-fusion porosity in the high porosity regime during laser powder bed fusion of Ti-6Al-4V. Journal of Materials Processing Technology. 2022; 300:117426. doi:10.1016/j.jmatprotec.2021.117426.
- [16] Worthington SR. Estimating effective porosity in bedrock aquifers. Groundwater. 2022;60(2):169-79. doi:10.1111/gwat.13171.
- [17] Ma B, Ma Y, Jiang Z, Qiu Z, Zhang Z, Wang L. Multiple approaches to quantifying the effective porosity of lacustrine shale oil reservoirs in Bohai Bay Basin, East China. Geofluids. 2020;2020:1-13. doi:10.1155/2020/8856620.
- [18] Li B, Xu C, Li H, Liu J, Xiao F. Permeability model and characteristics analysis of porous asphalt mixture under the circulation clogging and cleaning. Road Materials and Pavement Design. 2023;24(6):1440-60. doi:10.1080/14680629.2022.2075788.
- [19] Qalandari R, Fazeli H, Al-Awami AH, Paryani M, Norouzi A. Estimation of Rock Permeability Scores Using Machine Learning Methods. In: SPE Asia Pacific Oil and Gas Conference and Exhibition. 2022. SPE. doi:10.2118/210711-MS.
- [20] Idan RM, Jawed SN, Hassan MF. Depositional environments, facies distribution, and porosity analysis of Yamama Formation in Majnoon Oilfield. Sequence stratigraphic approach. The Iraqi Geological Journal. 2020:38-52. doi:10.46717/igj.53.1D.4Rw-2020-05-03.
- [21] Smith TM, Sayers CM, Sondergeld CH. Rock properties in low-porosity/low-permeability sandstones. The Leading Edge. 2009;28(1):48-59. doi:10.1190/1.3064146.
- [22] Zhang Y, Yu H, Wei W, Yuan G, Liu Z, He S. The effect of salt precipitation on the petrophysical properties and the adsorption capacity of shale matrix based on the porous structure reconstruction. Fuel. 2022;310:122287. doi:10.1016/j.fuel.2021.122287.
- [23] Al-Sudani H. Variation of Porosity and Permeability of Nahr Umr and Yamama Formations in South of Iraq. 2019. doi:10.13140/RG.2.2.20851.68646/1.
- [24] Saadu Y, Nwankwo C. Petrophysical evaluation and volumetric estimation within Central swamp depobelt, Niger Delta, using 3-D seismic and well logs. Egyptian journal of petroleum. 2018;27(4):531-9. doi:10.1016/j.ejpe.2017.08.004.
- [25] Chafeet HA, Dahham NA, Basher R. Study of petrophysical properties of Mishrif and Yamama formations at selected fields, south Iraq. Journal of Basrah Researches (Sciences). 2019;45(2). doi:http://brsj.cepsbasra.edu.iq.
- [26] Al-Jawad SN, Saleh AH. Flow units and rock type for reservoir characterization in carbonate reservoir: case study, south of Iraq. Journal of Petroleum Exploration and Production Technology. 2020;10:1-20. doi:10.1007/s13202-019-0736-4.
- [27] Al-Aani ZJY, Al-Najm FM, Khalaf ZA. Geological model Construction for Yamama Formation at Faihaa Oil Field-South of Iraq. Basrah Journal of Science. 2020;38(3):521-43. doi:10.29072/basjs.2020310.
- [28] Nasser ME, Al-Jawed SN, Hassan MF. Geological modeling for Yamama Formation in Abu Amood oil field. Iraqi Journal of Science. 2017;58(2C):1051-68. doi:10.24996/ij.s.2017.58.2C.9.

- [29] Khorshid SZ, Khaleel AI. Structural and Stratigraphic Study of the Nahr Umr Formation (Lower Cretaceous) Using 3D Seismic Survey in Abu Amood Oil Field, Southern Iraq. Iraqi Journal of Science. 2017; p. 1933-1945. doi: [10.24996/ij.s.2017.58.4A.15](https://doi.org/10.24996/ij.s.2017.58.4A.15).
- [30] Volokitin Y, Khabarov A. Interactive Petrophysical Model of Oilfields with Large Transition Zones Salym Fields Example. In: SPE Russian Oil and Gas Conference and Exhibition. 2010. OnePetro. doi: [10.2118/138093-MS](https://doi.org/10.2118/138093-MS).
- [31] Abdelmaksoud A, Radwan AA. Integrating 3D Seismic Interpretation, Well Log Analysis and Static Modelling for Characterizing the Late Miocene Reservoir, Ngatoro Area, New Zealand. Geomechanics and Geophysics for Geo-Energy and Geo-Resources. 2022;8(2): p. 1-31. doi: [10.1007/s40948-022-00364-](https://doi.org/10.1007/s40948-022-00364-).
- [32] Amraei H, Falahat R. Improved ST-FZI Method for Permeability Estimation to Include the Impact of Porosity Type and Lithology. Journal of Petroleum Exploration and Production. 2021;11(1): p. 109-115. doi: [10.1007/s13202-020-01061-6](https://doi.org/10.1007/s13202-020-01061-6).
- [33] Zhang F, Wu Y, Yang L, Zhang H, Zhang C, Wang X. A Quantitatively Determining Gas Saturation Method Using Pulsed-Neutron Element Logging in Tight Gas Reservoirs. In: SPWLA 63rd Annual Logging Symposium. 2022. OnePetro. doi: [10.30632/SPWLA-2022-0087](https://doi.org/10.30632/SPWLA-2022-0087).
- [34] AL-Baldawi BA. Hydrocarbon Reservoir Characterization Using Well Logs of Nahr Umr Formation in Kifl Oil Field, Central Iraq. Iraqi Journal of Science. 2022; p. 3544-3554. doi: [10.24996/ij.s.2022.63.8.27](https://doi.org/10.24996/ij.s.2022.63.8.27).
- [35] Khawaja AM, Thabit JM. Interpretation of 3D Seismic Reflection Data to Reveal Stratigraphic Setting of the Reservoir of Mishrif Formation in Dujaila Oil Field, Southeast of Iraq. Iraqi Journal of Science. 2021; p. 2250-2261. doi: [10.24996/ij.s.2021.62.7.14](https://doi.org/10.24996/ij.s.2021.62.7.14).
- [36] Mokhtar Ali H, Abu El Ela M, El-Banbi A. Alternating Conditional Expectation (ACE) Algorithm for Permeability Estimation in Bahariya Formation. SPE Reservoir Evaluation & Engineering. 2021;24(04): p. 765-779. doi: [10.2118/205502-PA](https://doi.org/10.2118/205502-PA).
- [37] Humadi JI, Jafar SA, Ali NS, Ahmed MA, Mzeed MJ, Al-Salhi RJ, Albayati TM. Recovery of Fuel from Real Waste Oily Sludge via a New Eco-Friendly Surfactant Material Used in a Digital Baffle Batch Extraction Unit. Scientific Reports. 2023;13(1): p. 9931. doi: [10.1038/s41598-023-37188-9](https://doi.org/10.1038/s41598-023-37188-9).
- [38] Al-Aani ZJY, Al-Najm FM, Khalaf ZA. Geological Model Construction for Yamama Formation at Faihaa Oil Field-South of Iraq. doi: [10.29072/basjs.2020310](https://doi.org/10.29072/basjs.2020310).

How to cite: Ahmed Khamees L, Nabeel Abdulrazzaq F, Ibrahim Humadi J. Predicting Reservoir or Non-Reservoir Formations by Calculating Permeability and Porosity in an Iraqi Oil Field. Journal of Chemical and Petroleum Engineering 2024; 58(1): 115-129.