



Structural Vibration Reduction Using Gain-Scheduled Fuzzy Control of Magnetorheological Dampers

C.M.D. Wilson^{1*} and M.M. Abdullah²

1. Assistant Professor, Civil and Environmental Engineering Department, New Mexico Institute of Mining and Technology, Socorro, New Mexico, USA

* Corresponding Author; email: cwilson@nmt.edu

2. Professor and Dean, College of Engineering Sciences, Technology and Agriculture at Florida Agricultural and Mechanical University, USA

ABSTRACT

Fuzzy control has recently been proposed to control the properties of magnetorheological (MR) dampers and therefore reduce vibrations of civil structures subjected to earthquake loads. These controllers have the advantage of not depending on system model, of being simple, and intrinsically robust. Their tuning, however, has shown to be a difficult task. This paper proposes a gain-scheduled fuzzy controller to regulate the damping properties of MR dampers and reduce structural responses of single degree-of-freedom seismically excited structures. Robustness of the algorithm to changes in seismic motions and structural characteristics were assessed by subjecting two different one-story buildings, one rigid and one flexible, to a wide range of earthquake records. Results show that the algorithm proposed effectively reduced responses of both structures to all twenty-four earthquake motions considered. In addition, results were compared to those of a fuzzy controller with constant scaling factors and to those of two passive systems: "passive on" and "passive off", where the current to the MR damper was set at maximum allowable value, and zero, respectively.

Keywords:

Fuzzy control;
Magnetorheological dampers;
Structural vibration

1. Introduction

Because of their capability of varying the amount of damping provided to a structure, magnetorheological (MR) dampers have been proposed to reduce structural vibrations caused by seismic motions. These devices consist of hydraulic cylinders filled with MR fluid, a suspension of micron-sized, magnetically polarizable iron particles capable of reversibly changing from a free-flowing, viscous fluid to a semi-solid. This is done through the application of a magnetic field to the MR fluid, causing the iron particles to form chains and therefore increase the fluid's viscosity. MR dampers are however highly nonlinear devices for which developing effective and practical control algorithms has proven to be a challenging task.

Several strategies proposed are model-based, that is, they require an accurate mathematical model of the system. The most commonly used controller in

this category is the clipped-optimal algorithm developed by Dyke et al [1-2]. It consists of a bang-bang (on-off) controller that attempts to generate a desirable control force which is determined by an "ideal" active controller using H_2/LQG strategies. The effectiveness of such controller has been extensively demonstrated [1-7]. Also in the model-based category are the optimal controllers [8-11], the control strategies based on Lyapunov stability theory [3, 5, 6, 12], as well as skyhook control and continuous sliding mode control [13].

Although model-based controllers have been successful in reducing structural vibrations, their performance is strongly affected by the accuracy of the model selected. Since models are based on assumptions and uncertainties, when designing model-based controllers, one must make sure that they will be robust enough to control the real life

structure [14]. Nonlinear and/or complex systems render the development of these controllers even more challenging. Models for such systems are often difficult to obtain and are usually very computationally intensive and therefore impractical for control applications. As an alternative, intelligent control strategies have been proposed for use with *MR* dampers. These controllers can be divided into the following three categories: neural network-based control [15-18], neuro-fuzzy based control [19-20], and fuzzy logic-based control [21-26].

Fuzzy controllers are an attractive alternative, not only because they are not based on a system model, but also because they are simple and intrinsically robust. These algorithms are based on intuitive understanding of the system and use “*IF-THEN*” rules instead of differential equations to relate the controller inputs to the desired outputs. There are three steps involved, namely:

- 1) Fuzzification, where membership functions convert crisp input values to fuzzy linguistic values.
- 2) Decision Making, which uses the “*IF-THEN*” rules created based on knowledge of the system to relate the linguistic input variables to linguistic output variables.
- 3) Defuzzification, where the fuzzy linguistic output variable is converted to a crisp control value [27].

Although fuzzy controllers are simple algorithms, their tuning is a complex and often difficult task due to the large number of parameters that define the membership functions and inference mechanisms [28-30]. Several methods have been developed for tuning these controllers [28, 31-38]. The most commonly used strategies involve the adjustment of the scaling factors [29-30] because these parameters are responsible for mapping the inputs and outputs to their universe of discourse and therefore have a large influence on the controller's performance. Among the methodologies proposed for tuning scaling factors are: heuristic approaches [30, 39-41], neuro-like approaches [32, 42], genetic algorithms [35, 43], and gain-scheduling [36, 37, 44]. The latter consists in varying one or more of the scaling factors online, according to the changes in the input variables to the fuzzy controller or the input excitation to the system. Although gain-scheduling has been proposed to tune scaling factors of some fuzzy-controlled

devices, it has not yet been employed with *MR* dampers, where all fuzzy control applications to date consist in selecting fixed values for all scaling factors and maintaining these values constant at all times.

Therefore, the objective of this paper is to develop a gain-scheduled fuzzy controller to regulate the damping properties of *MR* dampers and reduce structural responses of single degree-of-freedom (*SDOF*) seismically excited structures. Robustness of the algorithm to changes in seismic motions and structural characteristics will be assessed by subjecting two different one-story buildings, one rigid and one flexible, to a wide range of earthquakes.

2. System Description

The lumped mass model was selected to model the buildings, that is, the entire structural mass (m) was assumed to be located at the top of the building. Additional assumptions include constant stiffness (k) and damping (c). The equation of motion for the seismically excited *SDOF* structures equipped with a damper is as follows:

$$m\ddot{x} + c\dot{x} + kx = -f - m\ddot{x}_g \quad (1)$$

where x, \dot{x}, \ddot{x} are the floor displacement, velocity, and acceleration, respectively, f is the control force, and \ddot{x}_g is the ground acceleration.

2.1. Structural Parameters

The first building selected for designing and tuning of the controller has a mass of 345,600kg, a stiffness of $3.4 \times 10^7 N/m$ and a damping ratio of 0.02 [45]. Its natural frequency is 9.92rad/s and its period is 0.63s, therefore, according to Sadek and Mohaz [46], it is classified as a rigid structure. To test the robustness of the controller to changes in structural characteristics, a more flexible structure was also considered. Since damage to the building columns during seismic events causes a loss of structural stiffness, it would be important for the algorithm employed to still effectively control this less stiff structure. Thus, the second structure has the same mass and damping coefficient as the original building, but a reduced stiffness of $5.3 \times 10^6 N/m$. This value was chosen to obtain a flexible structure, that is, one with a period equal to or greater than 1.5s [46]. The resulting natural frequency is 3.92rad/s and the period is 1.6s.

2.2. MR Damper Model

Each building in this study was equipped with two large-scale 20-ton MR dampers. Since numerical simulations will be employed in this paper, a damper model will be necessary, but it is important to note that this model is only used to simulate structural responses, not to design or run the gain-scheduled fuzzy controller proposed.

The damper model selected was the phenomenological model proposed by Spencer Jr. et al [47], a modification of the commonly used Bouc-Wen model to improve the reproduction of the force-velocity behavior of the damper. It consists of the addition of a dashpot in series with the original Bouc-Wen model and a spring in parallel with the entire system. The force produced by the damper can be expressed as follows [47]:

$$f = \alpha z + c_o(\dot{x} - \dot{y}) + k_o(x - y) + k_1(x - x_o) = c_1\dot{y} + k_1(x - x_o) \tag{2}$$

$$\dot{z} = -\gamma|\dot{x} - \dot{y}|z|z|^{n-1} - \beta(\dot{x} - \dot{y})|z|^n + A(\dot{x} - \dot{y}) \tag{3}$$

$$\dot{y} = \frac{1}{c_o + c_1} \{ \alpha z + c_o\dot{x} + k_o(x - y) \} \tag{4}$$

where f is the control force of the MR damper, x , the damper displacement, y , an internal displacement of the damper, α , the Bouc-Wen parameter describing the MR fluid yield stress, c_o represents the viscous damping at large velocities, k_o the stiffness at large velocities, k_1 models the damper force due to the accumulator, and c_1 reproduces the roll-off occurring in the experimental data when velocities are close to zero. Values for the parameters of the 20-ton MR damper were obtained experimentally by Yang [48] and Yang et al [49]: $A = 2679.0m^{-1}$, γ and $\beta = 647.46m^{-1}$, $k_o = 137,810N/m$, $N = 10$, $x_o = 0.18m$, and $k_1 = 617.31N/m$. Variables α , c_o , c_1 are functions of the input current to the damper (i) [48-49]:

$$\alpha(i) = 16566i^3 - 87071i^2 + 168326i + 15114 \tag{5}$$

$$c_o(i) = 437097i^3 - 1545407i^2 + 1641376i + 457741 \tag{6}$$

$$c_1(i) = -9363108i^3 + 5334183i^2 + 48788640i - 2791630 \tag{7}$$

To accommodate the dynamics of the MR fluid reaching rheological equilibrium, the following first order filter is also provided by Yang [48] and Yang et al [49]:

$$H(s) = \frac{31.4}{s + 31.4} \tag{8}$$

2.3. Seismic Excitations

The north-south acceleration of four seismic motions with very different characteristics were used to tune the gain-scheduled fuzzy controller: El Centro, Hachinohe (Takochi-oki), Northridge, and Kobe (Hyogo-ken Nanbu), as shown in Table (1). To test the robustness of the controller to changes in seismic excitations, the structures were subjected to 20 additional seismic motions. These were selected by Sadek and Mohraz [46], to include a wide range of earthquake magnitudes, epicentral distances, peak ground accelerations and soil conditions, see Table (2).

3. Gain-Scheduled Fuzzy Controller

As can be seen in the system schematic presented in Figure (1), the input variables to the fuzzy controller were chosen as floor displacement (x) and floor velocity (\dot{x}), while the output as the current applied to the MR damper (i). Membership functions for both input variables are shown in Figure (2a) and consist of seven identical triangles with 50% overlap, defined on the universe of discourse $[-1, 1]$. Figure (2b) presents membership functions for the output, which were defined on the universe of discourse $[0, 1]$ and consist of four identical triangles,

Table 1. Earthquake records used for design of fuzzy controller.

Earthquake	Date	Magnitude	Component	Peak Acceleration (m/s ²)	RMS Acceleration (m/s ²)
El Centro, CA	May 18, 1940	7.1	N-S	3.4170	0.4764
Hachinohe, Japan	May 16, 1968	7.9	N-S	2.2500	0.3956
Northridge, CA	January 17, 1994	6.8	N-S	8.2676	0.7219
Kobe, Japan	January 17, 1995	6.9	N-S	8.1782	0.5909

Table 2. Earthquake records used for evaluation of controller's effectiveness.

Earthquake	Station Name	Magnitude	Component	Peak Acceleration (m/s ²)	RMS Acceleration (m/s ²)
San Fernando California 02/09/1971	Pacoima Dam	6.4	S16 E	11.4806	1.5954
	Pacoima Dam	6.4	S 74 W	10.5495	1.0744
	250 E. First Street Basement, Los Angeles	6.4	N 36 E	0.9781	0.1592
	250 E. First Street Basement, Los Angeles	6.4	N 54 W	1.2273	0.1584
Loma Prieta California 10/17/1989	Corralitos Eureka Canyon Road	7.1	0°	6.1770	0.7126
	Corralitos Eureka Canyon Road	7.1	90°	4.6938	0.6333
	Capitola Fire Station	7.1	0°	4.6292	0.8267
	Capitola Fire Station	7.1	90°	3.9079	0.6084
Northridge California 01/17/1994	Arleta Nordhoff Ave. Fire Station	6.7	90°	3.3732	0.3985
	Arleta Nordhoff Ave. Fire Station	6.7	360°	3.0205	0.3496
	Pacoima Dam Down Stream	6.7	175°	4.0711	0.4406
	Pacoima Dam Down Stream	6.7	265°	4.2555	0.3908
Northwest California 10/07/1951	Ferndale City Hall	5.8	S 44 W	1.0200	0.1001
	Ferndale City Hall	5.8	N 46 W	1.0950	0.1122
San Francisco California 03/22/1957	San Francisco Golden Gate Park	5.3	N10 E	0.8180	0.0663
	San Francisco Golden Gate Park	5.3	S 80 E	1.0280	0.0885
Helena Montana 10/31/1935	Helena Montana Carrol College	6.0	S 00 W	1.4350	0.0947
	Helena Montana Carrol College	6.0	S 90 W	1.4250	0.1190
Parkfield California 06/27/1966	Temblor, California # 2	5.6	N 65 W	2.6430	0.2504
	Temblor, California # 2	5.6	S 25 W	3.4080	0.3043

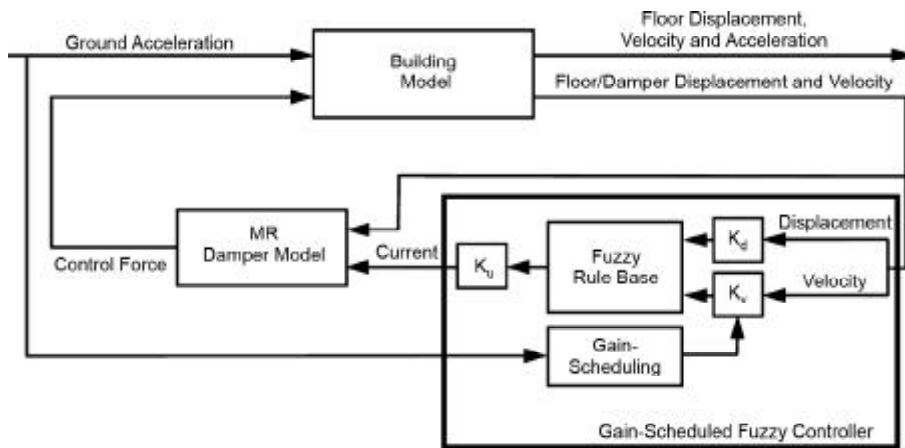


Figure 1. System diagram.

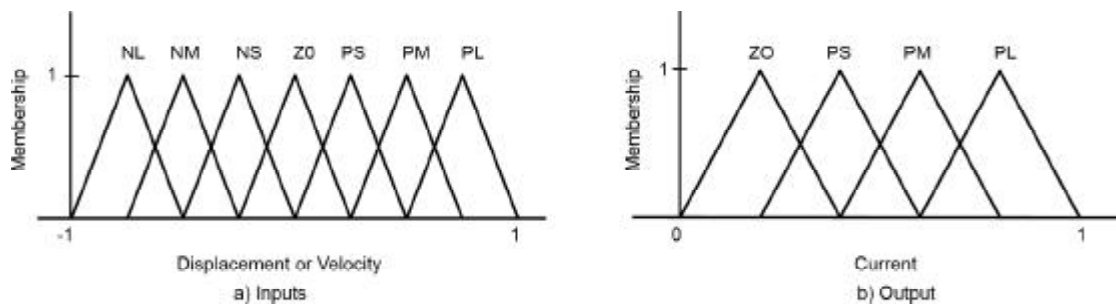


Figure 2. Membership functions.

also with 50% overlap. Labels *NL*, *NM*, *NS*, *ZO*, *PS*, *PM*, and *PL* refer to negative large, negative medium, negative small, zero, positive small, positive medium, and positive large, respectively.

Since the universes of discourse selected are normalized, scaling factors are required to map the variables. They are labeled K_d , K_v , and K_u , for displacement, velocity, and current, respectively. Selection of these parameters which is often referred to as tuning of the algorithm, is usually the most challenging portion of fuzzy controller design.

To select the scaling factor (or factors) that would be gain-scheduled, that is, that would be varied with respect to changes in either the input variables to the fuzzy controller or the input excitation to the system, a parametric analysis was conducted using the rigid structure. For this purpose, values for K_d , and K_v ranging from 0.01 to 50 were considered. These included values obtained with equations proposed by Yager and Filev [29]:

$$K_d = \frac{1}{d_{\max}} \tag{9}$$

$$K_v = \frac{1}{v_{\max}} \tag{10}$$

as well as those obtained with equations proposed by Liu et al [22]:

$$K_d = \frac{3}{d_{\max}} \tag{11}$$

$$K_v = \frac{3}{v_{\max}} \tag{12}$$

where d_{\max} and v_{\max} refer to the maximum structural displacement and velocity, respectively. Values for these variables were estimated based on the largest uncontrolled responses of the rigid structure to the following four earthquakes: El Centro, Hachinohe, Northridge, and Kobe, see Table (3). Values considered for K_u were 2, 4, and 6, which

Table 3. Uncontrolled responses of rigid structure to four different earthquakes.

Earthquake	Maximum Displacement (m)	Maximum Velocity (m/s)	Maximum Acceleration (m/s ²)
El Centro, CA	0.0870	0.8126	10.4105
Hachinohe, Japan	0.0514	0.4968	5.2095
Northridge, CA	0.1436	1.4306	19.8497
Kobe, Japan	0.2204	2.1732	24.5961

also include the value recommended by Liu et al [22]:

$$K_u = \frac{i_{\max} - i_{\min}}{3} \tag{13}$$

where the minimum input current (i_{\min}) is 0A, and the maximum input current (i_{\max}) is 6 A [48]. Results of this parametric analysis led to the belief that there might be a relationship between K_v and the ground motion intensity. To further explore this relationship, a second analysis was conducted where the rigid structure was subjected to the following scaled versions of the El Centro earthquake: 25%, 50%, and 100%. K_v values selected ranged from 0.01 to 10. Values of K_v greater than 10 were not considered in this second parametric analysis because they did not seem to be effective, and in some instances, led to inconsistent results. Values for K_d ranged from 2 to 50 and K_u was selected as 2, 4, and 6.

Results of this study showed that the controller was not sensitive to changes in the magnitude of K_d or K_u . Therefore, these scaling factors will remain constant and equal to the values that yielded the best results for the cases considered: $K_d = 7$, and $K_u = 4$. Results of these simulations also showed that the smaller the earthquake, the smaller the value of K_v that would produce greater structural reductions. A linear equation relating the ground acceleration (\ddot{x}_g) and scaling factor K_v was therefore obtained and is presented below:

$$K_v(t) = 23.37|\ddot{x}_g(t)| - 0.68 \tag{14}$$

Since there are no systematic methods for creating rule-bases for fuzzy logic controllers, standard rule-bases are often selected as a starting point [29] and if necessary, modified to better achieve the control objectives. In this paper, the rule-base developed by MacVicar-Whelan [50] and a modified version of such standard, developed by Liu et al [22], were selected as starting points because they seemed to well represent the desired control strategy for the different displacement and velocity combinations. For example: if displacement was “large” and velocity was also “large” and in the same direction, the rules dictated that current applied should be “large” to increase the amount of damping provided. Since variations to these standards did not appreciably modify the results obtained, the Liu et al [22] rule-base was ultimately selected and is presented in Table (4).

Table 4. Control rule base [22].

$x \backslash \dot{x}$	NL	NM	NS	ZO	PS	PM	PL
NL	PL	PL	PL	PM	ZO	ZO	ZO
NM	PL	PL	PL	PS	ZO	ZO	PS
NS	PL	PL	PL	ZO	ZO	PS	PM
ZO	PM	PL	PS	ZO	PS	PM	PL
PS	PS	PM	ZO	ZO	PL	PL	PL
PM	ZO	PS	ZO	PS	PL	PL	PL
PL	ZO	ZO	ZO	PM	PL	PL	PL

To determine both the effectiveness and the robustness of the gain-scheduled fuzzy algorithm developed to changes in seismic motions, the rigid structure was subjected to all 24 earthquakes mentioned previously. The robustness of the controller to changes in structural characteristics was evaluated by subjecting the flexible structure to all 24 earthquakes while controlled by the gain-scheduled algorithm developed and tuned using responses of the rigid building.

4. Results and Discussion

Matlab and Simulink were used for the numerical simulation of structural responses of the gain-scheduled fuzzy control strategy proposed. Four criteria were used to evaluate the effectiveness of the control system: the first two (J_1 and J_2) were based on root mean square (RMS) displacement and acceleration, respectively, while the last two (J_3 and J_4) were based on peak displacement and

acceleration, also respectively. All evaluation criteria were obtained by dividing the controlled responses by the respective uncontrolled responses, as shown in Eqs. (15) to (18):

$$J_1 = \frac{RMS(x(t))}{RMS(x_{unc}(t))} \tag{15}$$

$$J_2 = \frac{RMS(\ddot{x}(t))}{RMS(\ddot{x}_{unc}(t))} \tag{16}$$

$$J_3 = \frac{\max|x(t)|}{\max|x_{unc}(t)|} \tag{17}$$

$$J_4 = \frac{\max|\ddot{x}(t)|}{\max|\ddot{x}_{unc}(t)|} \tag{18}$$

where x and \ddot{x} are the controlled displacement and acceleration, respectively, whereas x_{unc} and \ddot{x}_{unc} are the uncontrolled displacement and acceleration, also respectively.

For succinctness, results to only 4 of the 24 earthquakes selected are presented in graphical form; nevertheless, discussions will be considering responses to all 24 earthquakes. Figures (3) to (6) show displacement and acceleration responses of the rigid structure to the following four earthquakes: El Centro, Hachinohe, Northridge, and Kobe. Average values for the evaluation parameters of all 24 earthquakes, along with their respective 95% confidence intervals were found to be: $\bar{J}_1 = 0.292 (\pm 0.063)$, $\bar{J}_2 = 0.768 (\pm 0.249)$, $\bar{J}_3 = 0.453 (\pm 0.106)$,

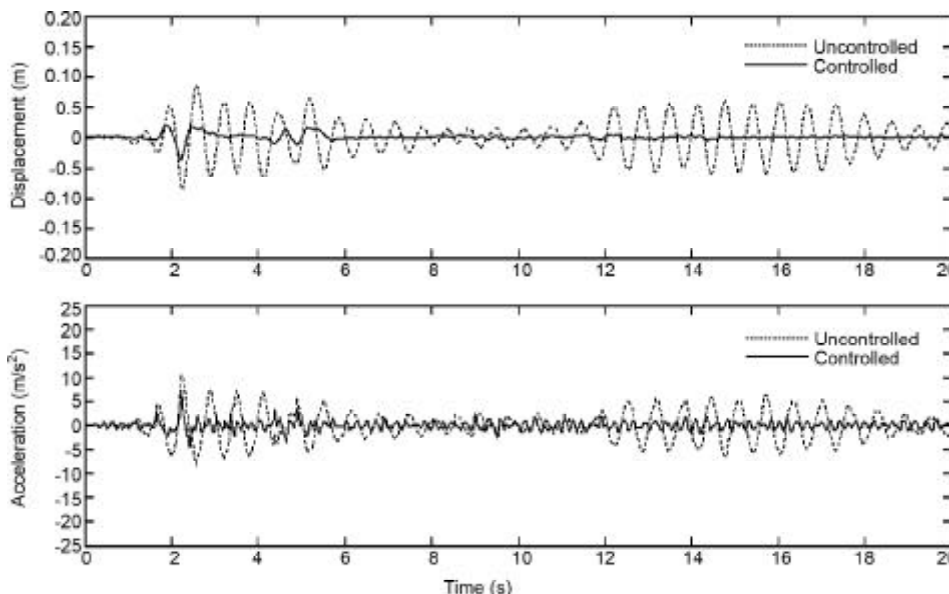


Figure 3. Rigid building responses to El Centro earthquake.

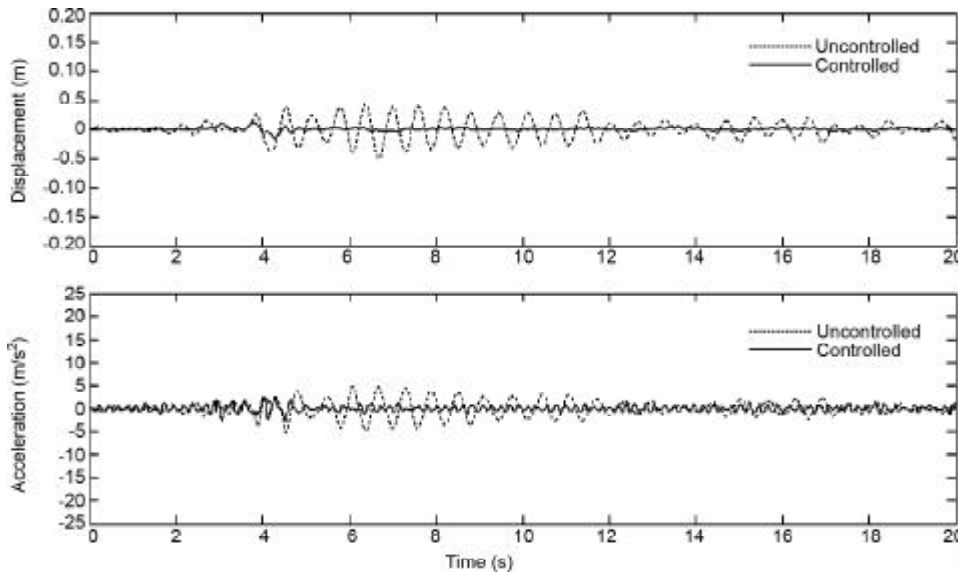


Figure 4. Rigid building responses to Hachinohe earthquake.

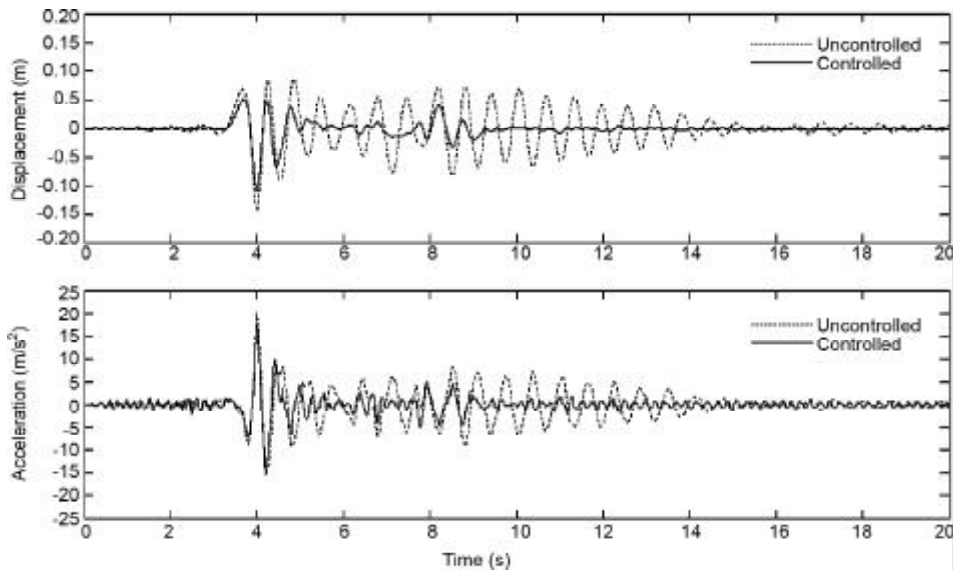


Figure 5. Rigid building responses to Northridge earthquake.

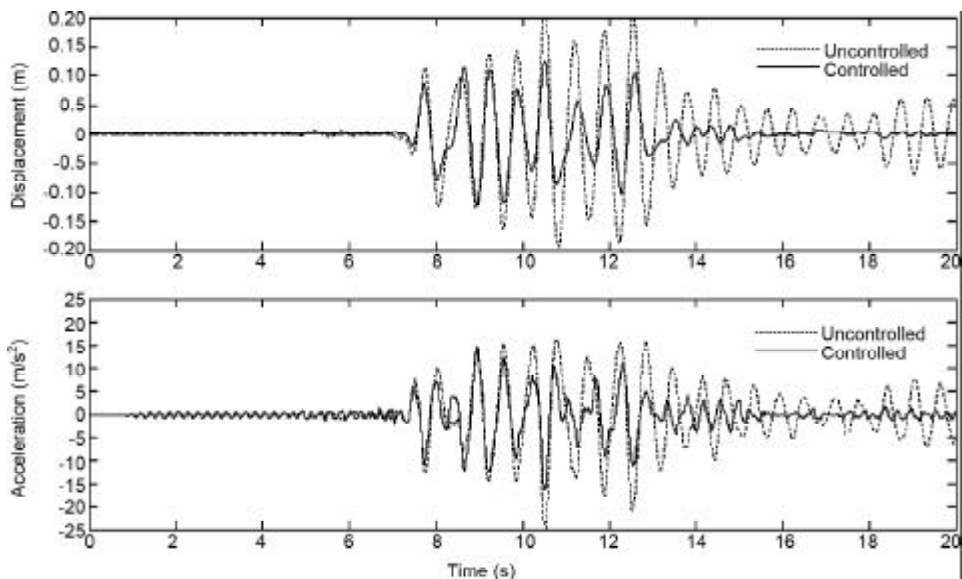


Figure 6. Rigid building responses to Kobe earthquake.

and $\bar{J}_4 = 0.824 (\pm 0.125)$, showing that peak and RMS displacements and accelerations were reduced with the gain-scheduled fuzzy controlled MR dampers for a very wide range of seismic motions. As expected, displacement reductions were larger than those obtained for acceleration because control rules were based on floor displacement.

RMS displacements were reduced for all excitations and J_1 values ranged from 0.068 for the N46W component of the Northwest earthquake to 0.556 for the S25W component of the Parkfield earthquake. Peak displacements were reduced for all but one seismic motion, with J_3 values reaching 0.093 for the N54W component of the San Fernando earthquake. RMS accelerations were reduced for almost all of the excitations considered, with the lowest value for J_2 , 0.216, obtained for the FS90 component of the Loma Prieta earthquake at the Capitola station. Peak accelerations were also reduced for most earthquakes, and J_4 reached 0.353 for the N54W component of the San Fernando earthquake.

These results were compared to those obtained with the fuzzy control strategy presented in [24, 26] which uses constant scaling factors: $K_d = 32$, $K_v = 3.3$, and $K_d = 4$. For simplicity, in this paper, this strategy will be referred to as “fuzzy control”, while the gain-scheduled fuzzy control system will simply be called “gain-scheduled”. Average results for these two control strategies (\bar{J}) are presented in Figure (7) and Table (5), along with those obtained with two passive systems: “passive on” and “passive off”, where the current to the MR damper was set at maximum allowable value, and zero, respectively. Paired difference two-tailed t-tests were conducted to compare the average value of the evaluation criteria of each of the control strategies against each other. Observed significance levels (P -values) for these tests are presented in Table (6). Results show that the gain-scheduled algorithm performed better than the fuzzy controller that maintained constant all scaling factors. For evaluation criteria \bar{J}_1 and \bar{J}_3 , the gain-scheduled controller was more effective

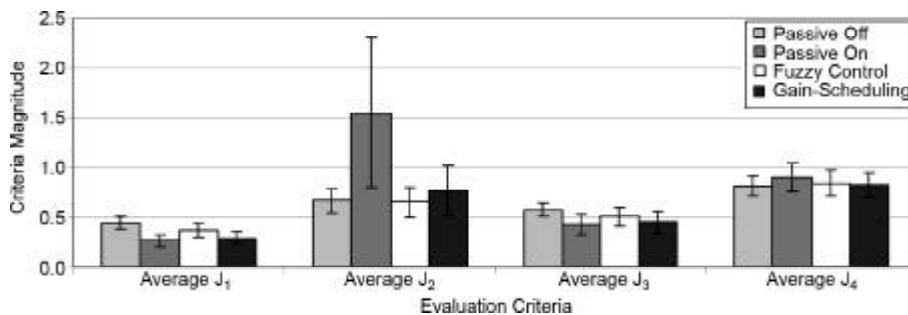


Figure 7. Comparison of average evaluation criteria values for the rigid structure's responses obtained with different control strategies (Error bars indicate 95% intervals).

Table 5. Average values of evaluation criteria for rigid structure's responses obtained with different control strategies (95% intervals presented in parenthesis).

	\bar{J}_1	\bar{J}_2	\bar{J}_3	\bar{J}_4
Passive Off	0.445 (± 0.064)	0.667 (± 0.124)	0.575 (± 0.068)	0.818 (± 0.098)
Passive On	0.268 (± 0.062)	1.548 (± 0.752)	0.423 (± 0.101)	0.902 (± 0.144)
Fuzzy Controller	0.374 (± 0.075)	0.652 (± 0.151)	0.507 (± 0.097)	0.843 (± 0.129)
Gain-Scheduled	0.292 (± 0.063)	0.768 (± 0.249)	0.453 (± 0.106)	0.824 (± 0.125)

Table 6. Average values of evaluation criteria for rigid structure's responses obtained with different control strategies (95% intervals presented in parenthesis).

	\bar{J}_1	\bar{J}_2	\bar{J}_3	\bar{J}_4
Passive Off vs. Passive On	< 0.01	0.01	< 0.01	0.05
Passive Off vs. Fuzzy Controller	< 0.01	0.41	0.01	0.27
Passive Off vs. Gain-Scheduled	< 0.01	0.18	< 0.01	0.82
Passive On vs. Fuzzy Controller	< 0.01	0.01	< 0.01	0.07
Passive On vs. Gain-Scheduled	< 0.01	< 0.01	< 0.01	0.01
Fuzzy Controller vs. Gain-Scheduled	< 0.01	0.08	0.01	0.32

than the fuzzy controller ($P < 0.01$ and $P = 0.01$, respectively), while for evaluation criteria \bar{J}_2 and \bar{J}_4 , paired difference t-test results ($P = 0.08$ and $P = 0.32$, respectively) indicate that there might be no difference in the values of the parameters obtained with the different fuzzy controllers.

As anticipated, the passive on scheme was found more effective in reducing *RMS* and peak displacements than the passive off strategy ($P < 0.01$ for \bar{J}_1 and \bar{J}_3), while the passive off was found more effective than its passive counterpart in reducing *RMS* and peak accelerations ($P = 0.01$ for \bar{J}_2 , $P = 0.05$ for \bar{J}_4). Both fuzzy control strategies (with constant and gain-scheduled scaling factors) were found to improve on the performance of the passive on system with respect to acceleration reduction. Paired difference t-tests showed that, like the passive on system, these two controllers reduced *RMS* and peak displacements more effectively than the passive off scheme, but instead of a worse performance with respect to acceleration, these tests indicated that there might be no difference in *RMS* and peak acceleration results obtained with the passive off and the other two fuzzy systems. Finally, comparisons were made between the passive on system and the two fuzzy systems. For these cases, it was found that, although the passive on system was more effective than the fuzzy systems in reducing displacements, these control schemes performed better with respect to *RMS* acceleration ($P = 0.01$ for fuzzy control, $P < 0.01$ for gain-scheduled

control). In addition, while there seemed to be no difference in peak acceleration reduction with the fuzzy and the passive on schemes ($P = 0.07$), the gain-scheduled controller outperformed the passive on system in this aspect ($P = 0.01$).

The flexible structure previously described was also subjected to the 24 seismic motions to test the robustness of the gain-scheduled control algorithm to changes in structural characteristics. From these results, some of which are presented in Figures (8) to (11), it can be seen that, although tuned for a different structure, this algorithm was still able to effectively reduce responses of this flexible structure to the earthquakes. *RMS* and peak displacements were all reduced: with \bar{J}_1 values ranging from 0.319 to 0.041 and \bar{J}_3 values ranging from 0.748 to 0.087. Peak and *RMS* accelerations were reduced for most excitations considered. Average results for this control strategy are presented in Figure (12) and Table (7), along with those obtained with the fuzzy controller with fixed scaling factors and the two passive systems. Paired difference two-tailed t-tests were also conducted to compare the average evaluation criteria of each of the control strategies against each other and the P-values obtained are presented in Table (8). As with the rigid structure, the gain-scheduled controller was more effective in reducing *RMS* displacements than the fuzzy controller ($P < 0.01$) and as effective as the fuzzy controller in reducing both peak displacements ($P = 0.09$) and peak accelerations ($P = 0.51$). However,

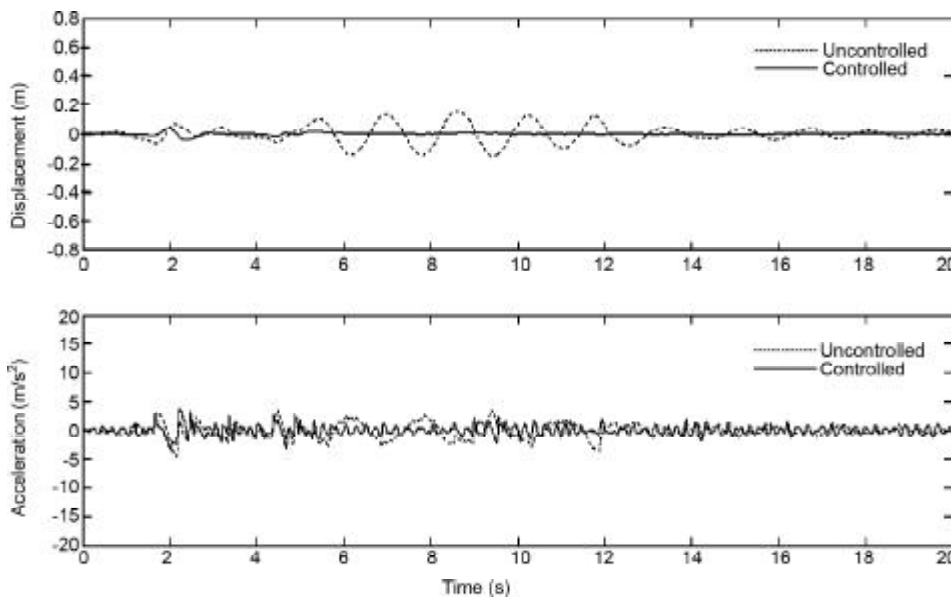


Figure 8. Flexible building responses to El Centro earthquake.

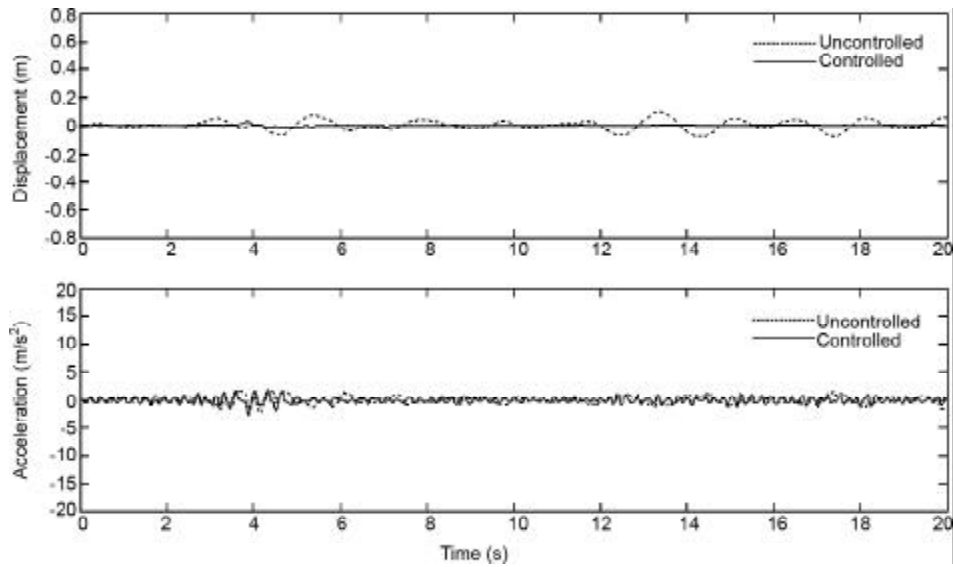


Figure 9. Flexible building responses to Hachinohe earthquake.

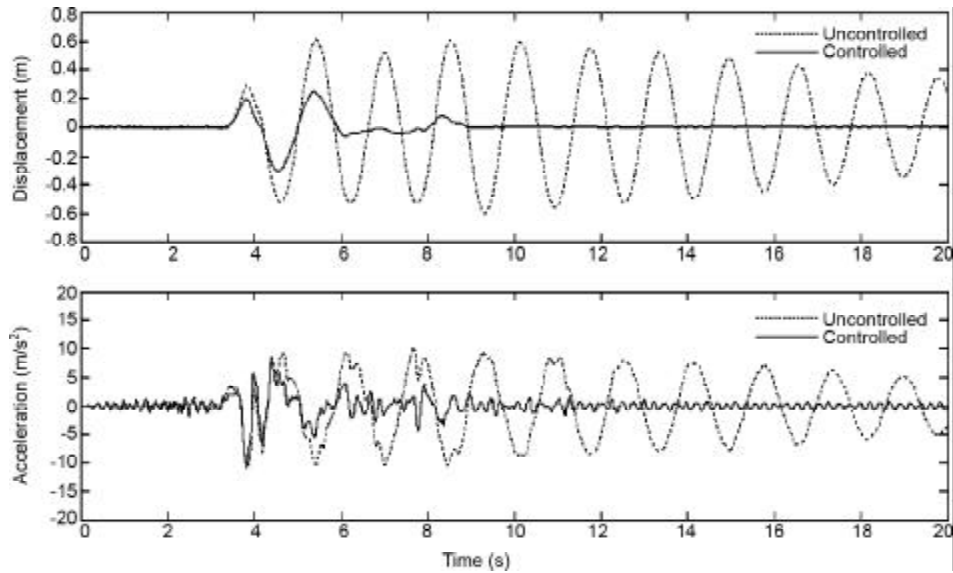


Figure 10. Flexible building responses to Northridge earthquake.

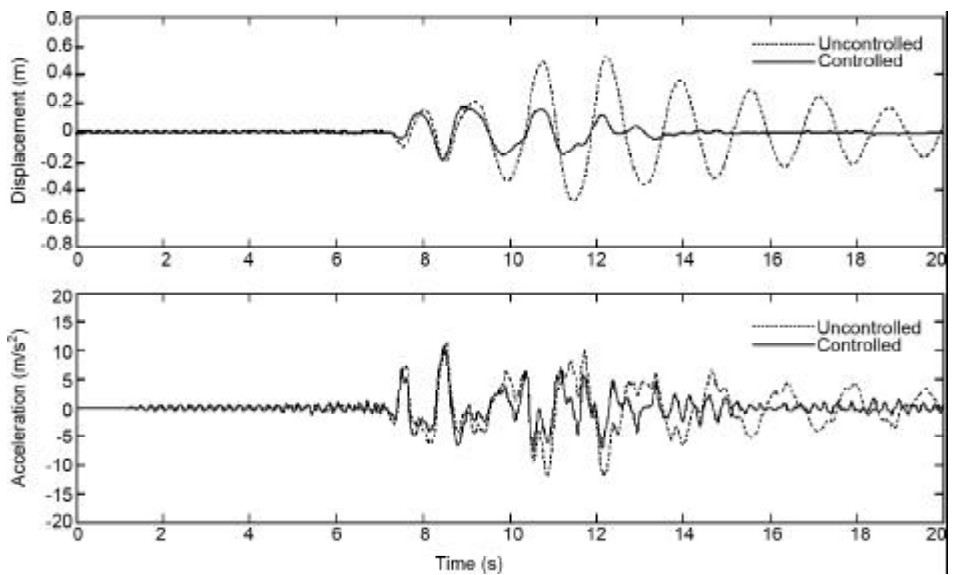


Figure 11. Flexible building responses to Kobe earthquake.

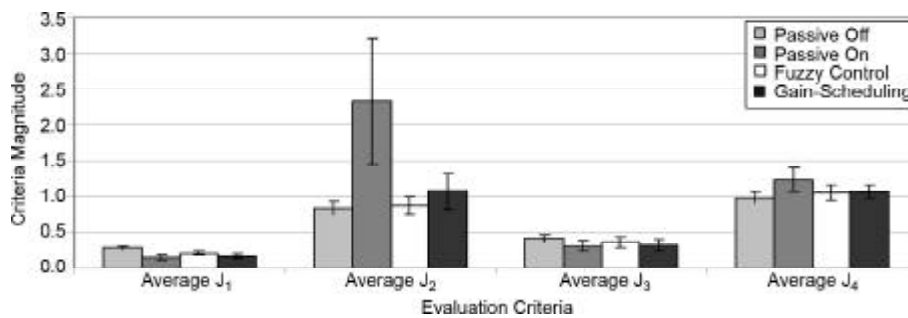


Figure 12. Comparison of average evaluation criteria values for the flexible structure's responses obtained with different control strategies (Error bars indicate 95% intervals).

Table 7. Average values of evaluation criteria for flexible structure's responses obtained with different control strategies (95% intervals presented in parenthesis).

	\bar{J}_1	\bar{J}_2	\bar{J}_3	\bar{J}_4
Passive Off	0.284 (± 0.027)	0.845 (± 0.088)	0.413 (± 0.049)	0.985 (± 0.072)
Passive On	0.160 (± 0.033)	2.328 (± 0.880)	0.308 (± 0.073)	1.234 (± 0.173)
Fuzzy Controller	0.214 (± 0.028)	0.876 (± 0.122)	0.361 (± 0.066)	1.053 (± 0.105)
Gain-Scheduled	0.168 (± 0.031)	1.073 (± 0.250)	0.326 (± 0.077)	1.070 (± 0.091)

Table 8. Observed significance level (P-values) for paired difference two-tailed t-tests obtained for the flexible structure.

	\bar{J}_1	\bar{J}_2	\bar{J}_3	\bar{J}_4
Passive Off vs. Passive On	< 0.01	< 0.01	< 0.01	< 0.01
Passive Off vs. Fuzzy Controller	< 0.01	0.18	0.02	0.03
Passive Off vs. Gain-Scheduled	< 0.01	0.02	< 0.01	< 0.01
Passive On vs. Fuzzy Controller	< 0.01	< 0.01	< 0.01	< 0.01
Passive On vs. Gain-Scheduled	0.13	< 0.01	0.02	< 0.01
Fuzzy Controller vs. Gain-Scheduled	< 0.01	0.01	0.09	0.51

with respect to *RMS* accelerations, the fuzzy controller outperformed the gain-scheduled scheme ($P = 0.01$). Yet, it is important to note that the gain-scheduled controller was not tuned to the responses of this flexible structure and that the aim of this exercise is only to test the robustness of the control system to changes in structural stiffness. Comparing results of the gain-scheduled controller and the passive systems, it can be seen that, as expected, gain-scheduled control outperforms the passive off system with respect to displacement reductions ($P < 0.01$ for \bar{J}_1 and \bar{J}_3) while the inverse is observed with acceleration reductions ($P = 0.02$ for \bar{J}_2 , $P < 0.01$ for \bar{J}_4). Finally, the gain-scheduled strategy was more effective than the passive on with respect to acceleration reductions ($P < 0.01$ for \bar{J}_2 and \bar{J}_4), as effective as the passive on scheme for *RMS* displacement reduction ($P=0.13$ for \bar{J}_1), but less effective for peak displacements ($P=0.02$ for \bar{J}_3).

5. Conclusions

In this paper, a gain-scheduled fuzzy controller was developed to regulate the damping properties of *MR* dampers, thereby reducing structural responses of *SDOF* seismically excited structures. Simulations were conducted in Matlab and Simulink to demonstrate the effectiveness and robustness of the control algorithm. Results showed that not only is this algorithm capable of reducing structural responses to a very wide range of earthquakes, being therefore robust to changes in external excitations, but it is also more effective in reducing structural displacements than the fuzzy controller proposed in [24, 26], which maintained all scaling factors constant. When compared to passive control strategies, see Figure (7), it was shown that the gain-scheduled controller performed similarly to the passive on system with respect to displacement reductions, but more effectively with respect to acceleration reductions. Statistical analysis also

showed that the overall performance of the gain-scheduled controller was better than that of the passive off system.

Finally, the robustness of the proposed gain-scheduled fuzzy control algorithm to changes in structural characteristics was demonstrated by subjecting a more flexible structure to the same seismic motions. Results of these analyzes showed that although tuned for a different structure, this algorithm was still able to effectively reduce responses of the flexible structure to the seismic excitations.

Because the extension of these algorithms to multi-degree-of-freedom structures would be especially important for their practical implementation, the first author of this paper is currently evaluating this possibility. Variations in the number, the size, and the placement of the dampers are being considered as are centralized and decentralized controllers. Preliminary results have shown to be very promising.

References

1. Dyke, S.J., Spencer Jr, B.F., Sain, M.K., and Carlson, J.D. (1996). "Experimental Verification of Semi-Active Structural Control Strategies Using Acceleration Feedback", *3rd Intern. Conf. on Motion and Vibration Control, Chiba, Japan*, 291-296.
2. Dyke, S.J., Spencer Jr, B.F., Sain, M.K., and Carlson, J.D. (1996). "Modeling and Control of Magnetorheological Dampers for Seismic Response Reduction", *Smart Materials and Structures*, **5**, 565-575.
3. Dyke, S.J. and Spencer Jr, B.F. (1997). "Comparison of Semi-Active Control Strategies for the MR Damper", *International Conference, Intelligent Information Systems*, Bahamas.
4. Dyke, S.J. (1998). "Seismic Protection of a Benchmark Building Using Magnetorheological Dampers", *2nd World Conference on Structural Control, Japan*.
5. Jansen, L.M. and Dyke, S.J. (2000). "Semi-Active Control Strategies for MR Dampers: A Comparative Study", *Journal of Engineering Mechanics*, **126**(8), 795-803.
6. Yi, F., Dyke, S.J., Caicedo, J.M., and Carlson, J.D. (2001). "Experimental Verification of Multi-Input Seismic Control Strategies for Smart Dampers", *J. of Engineering Mechanics*, **127**(11), 1152-1164.
7. Yoshida, O., Dyke, S.J., Giacosa, L.M., and Truman, K.Z. (2002). "Torsional Response Control of Asymmetric Buildings Using Smart Dampers", *15th ASCE Engineering Mechanics Conf.*, New York, NY.
8. Zhang, J. and Roschke, P.N. (1999). "Active Control of a Tall Structure Excited by Wind", *Journal of Wind Engineering and Industrial Aerodynamics*, **83**, 209-223.
9. Xu, Y.L., Qu, W.L., and Ko, J.M. (2000). "Seismic Response Control of Frame Structures Using Magnetorheological/Electrorheological Dampers", *Earthquake Engineering and Structural Dynamics*, **29**, 557-575.
10. Chang, C.-C. and Zhou, L. (2002). "Neural Network Emulation of Inverse Dynamics for a Magnetorheological Damper", *Journal of Structural Engineering*, **128**(2), 231-239.
11. Zhou, L., Chang, C.-C., and Spencer Jr, B.F. (2002). "Intelligent Technology-Based Control of Motion and Vibration Using MR Dampers", *Earthquake Engineering and Engineering Vibration*, **1**(1), 100-110.
12. McClamroch, N.H. and Gavin, H.P. (1995). "Closed Loop Structural Control Using Electro-rheological Dampers", *American Control Conf.*, Seattle, WA, 4173-4177.
13. Hiemenz, G.J., Choi, Y.-T., and Wereley, N.M. (2000). "Seismic Control of Civil Structures Utilizing Semi-Active MR Bracing Systems", *Proceedings of SPIE, Newport Beach, CA*, 217-228.
14. Sreenatha, A.G. and Pradhan, M. (2002). "Fuzzy Logic Controller for Position Control of Flexible Structures", *Acta Astronautica*, **50**(11), 665-671.
15. Dalei, G. and Jianqiang, Y. (2002). "Semi-Active Seismic Isolation Control Based on MR Damper and Neural Networks", *6th International Conf. on Motion and Vibration Control, Saitama, Japan*, 13-18.

16. Ni, Y.Q., Chen, Y., Ko, J.M., and Cao, D.Q. (2002). "Neuro-Control of Cable Vibration Using Semi-Active Magneo-Rheological Dampers", *Engineering Structures*, **24**, 295-307.
17. Shiraishi, T., Nakaya, N., and Morishita, S. (2002). "Structural Control by a Variable Damper Using MR Fluid", *6th International Conference on Motion and Vibration Control, Saitama, Japan*, 24-29.
18. Xu, Z.-D., Shen, Y.-P., and Guo, Y.-Q. (2003). "Semi-Active Control of Structures Incorporated with Magnetorheological Dampers Using Neural-Networks", *Smart Materials and Structures*, **12**, 80-87.
19. Schurter, K.C. and Roschke, P.N. (2001). "Neuro-Fuzzy Control of Structures Using Acceleration Feedback", *Smart Materials and Structures*, **10**(4), 770-779.
20. Schurter, K.C. and Roschke, P.N. (2001). "Neuro-Fuzzy Control of Structures Using Magnetorheological Dampers", *American Control Conference, Arlington, VA*, 1097-1102.
21. Zhou, L. and Chang, C.-C. (2000). "Adaptive Fuzzy Control for a Structure-MR Damper System", SPIE, Newport Beach, CA, 105-115.
22. Liu, Y., Gordaninejad, F., Evrensel, C.A., and Hitchcock, G. (2001). "An Experimental Study on Fuzzy Logic Vibration Control of a Bridge Using Fail-Safe Magneto-Rheological Fluid Dampers", *Smart Systems and Materials, Newport Beach, USA*, 281-288.
23. Choi, K.-M., Cho, S.-W., Jung, H.-J., and Lee, I.-W. (2004). "Semi-Active Fuzzy Control for Seismic Response Reduction Using Magnetorheological Dampers", *Earthquake Engineering and Structural Dynamics*, **33**, 723-736.
24. Wilson, C.M.D. (2005). "Fuzzy Control of Magnetorheological Dampers for Vibration Reduction in Civil Structure", Dissertation, Florida State University, Tallahassee, FL.
25. Wilson, C.M.D. and Abdullah, M.M. (2005). "Fuzzy Control of Magnetorheological Dampers in Civil Structures", *6th European Conference on Structural Dynamics (EURODYN), Paris, France*, **13**, 1563-1568.
26. Wilson, C.M.D. and Abdullah, M.M. (2005). "Structural Vibration Reduction Using Fuzzy Control of Magnetorheological Dampers", ASCE Structures Congress, New York.
27. Marazzi, F. and Magonette, G. (2001). "Active and Semi-Active Control of Structures: A Comparison", European Meeting on Intelligent Structures, Ishia, Italy.
28. Zheng, L.A. (1992). "A Practical Guide to Tune of Proportional and Integral (PI) Like Fuzzy Controllers", *First IEEE International Conf. on Fuzzy Systems*, San Diego, CA.
29. Yager, R.R. and Filev, D.P. (1994). "Essentials of Fuzzy Modeling and Control", John Wiley & Sons, Inc., New York.
30. Li, H.-X. and Gatland, H.B. (1996). "Conventional Fuzzy Control and Its Enhancement", *IEEE Transactions on Systems, Man, and Cybernetics*, **26**(5), 791-797.
31. Braae, M. and Rutherford, D.A. (1979). "Selection of Parameters for a Fuzzy Logic Controller", *Fuzzy Sets and Systems*, **2**, 185-199.
32. Nishimori, K., Hirakawa, S., Hiraga, H., and Ishihara, N. (1994). "Selection of Fuzzy Control Rules Using Automatic Tuning of Membership Functions", NAFIPS-IFIS-NASA, San Antonio, TX, 82-83.
33. Smith, M.H. (1994). "Tuning Membership Functions, Tuning AND and OR Operations, Tuning Defuzzification: Which Is Best?", NAFIPS-IFIS-NASA, San Antonio, TX, 347-351.
34. Woo, Z.-W., Chung, H.-Y., and Lin, J.-J. (2000). "A PID Type Fuzzy Controller with Self-Tuning Scaling Factors", *Fuzzy Sets and Systems*, **115**, 321-326.
35. Arslan, A. and Kaya, M. (2001). "Determination of Fuzzy Logic Membership Functions Using Genetic Algorithms", *Fuzzy Sets and Systems*, **118**, 297-306.
36. Zhao, Y. (2001). "Autotuning of an Industrial Weigh Belt Feeder", Dissertation, Florida State University, Tallahassee, FL.

37. Zhao, Y. and Collins Jr., E.G. (2003). "Fuzzy PI Control Design for an Industrial Weigh Belt Feeder", *IEEE Transactions on Fuzzy Systems*, **11**(3), 311-319.
38. Zhao, Y. and Collins Jr., E.G. (2003). "Parallel Parking of Autonomous Ground Vehicles in Tight Spaces Using Fuzzy Logic", *IEEE International Conference on Robotics and Automation*.
39. Daugherty, W.C., Rathakrishnan, B., and Yen, J. (1992). "Performance Evaluation of a Self-Tuning Fuzzy Controller", *IEEE International Conference on Fuzzy Systems*, San Diego, CA.
40. Driankov, D., Hellendoorn, H., and Reinfrank, M. (1993). "An Introduction to Fuzzy Control", Heidelberg, Springer-Verlag, Berlin.
41. Faravelli, L. and Yao, T. (1996). "Use of Adaptive Networks in Fuzzy Control of Civil Structures", *Microcomputers in Civil Engineering*, **11**, 67-76.
42. Chao, C.-T. and Teng, C.-C. (1997). "A PD-Like Self-Tuning Fuzzy Controller Without Steady-State Error", *Fuzzy Sets and Systems*, **87**, 141-154.
43. Zhao, Y., Collins Jr., E.G., and Dunlap, D. (2003). "Genetic Fuzzy Parallel Parking Control for Autonomous Ground Vehicles", *American Control Conference*, Denver, CO.
44. Jang, J.-S.R. and Gulley, N. (1994). "Gain Scheduling Based on Fuzzy Controlled Design", NAFIPS-IFIS-NASA, San Antonio, TX, 101-107.
45. Yeh, K., Chiang, W.-L., and Juang, D.-S. (1994). "Application of Fuzzy Control Theory in Active Control of Structures", NAFIPS-IFIS-NASA, San Antonio, TX, 243-247.
46. Sadek, F. and Mohraz, B. (1998). "Semiactive Control Algorithms for Structures with Variable Dampers", *J. of Engineering Mechanics*, **124**(9), 981-990.
47. Spencer Jr, B.F., Dyke, S.J., Sain, M.K., and Carlson, J.D. (1997). "Phenomenological Model of a Magnetorheological Damper", *Journal of Engineering Mechanics*, **123**(3), 230-238
48. Yang, G. (2001). "Large-Scale Magnetorheological Fluid Damper for Vibration Mitigation: Modeling, Testing and Control", Dissertation, University of Notre Dame, Notre Dame, Indiana.
49. Yang, G., Spencer Jr., B.F., Carlson, J.D., and Sain, M.K. (2002). "Large-Scale MR Fluid Dampers: Modeling, and Dynamic Performance Considerations", *Engineering Structures*, **24**(3), 309-323.
50. MacVicar-Whelan, P.J. (1976). "Fuzzy Sets for Man-Machine Interactions", *International J. of Man-Machine Studies*, **8**, 687-697.