

Original Article**Ischemia detection by electrocardiogram in wavelet domain using entropy measure**

Hossein Rabbani¹, Mohammad Parsa Mahjoob², Eiman Farahabadi³,
Amin Farahabadi³, Alireza Mehri Dehnavi⁴

Abstract

BACKGROUND: Ischemic heart disease is one of the common fatal diseases in advanced countries. Because signal perturbation in healthy people is less than signal perturbation in patients, entropy measure can be used as an appropriate feature for ischemia detection.

METHODS: Four entropy-based methods comprising of using electrocardiogram (ECG) signal directly, wavelet sub-bands of ECG signals, extracted ST segments and reconstructed signal from time-frequency feature of ST segments in wavelet domain were investigated to distinguish between ECG signal of healthy individuals and patients. We used exercise treadmill test as a gold standard, with a sample of 40 patients who had ischemic signs based on initial diagnosis of medical practitioner.

RESULTS: The suggested technique in wavelet domain resulted in the highest discrepancy between healthy individuals and patients in comparison to other methods. Specificity and sensitivity of this method were 95% and 94% respectively.

CONCLUSIONS: The method based on wavelet sub-bands outperformed the others.

KEYWORDS: Ischemia, Electrocardiogram, Exercise Test.

J Res Med Sci 2011; 16(11): 1473-1482

Ischemia means lack of oxygen due to insufficient blood circulation. Ischemic heart disease is a condition with different causes which have one thing in common, the imbalance between the supply and demand of oxygen. This disease is one of the common fatal diseases in advanced countries.¹ Arteriosclerosis, which is a general phrase for thickening and hardening of artery wall, is one of the main reasons of mortality in most countries.¹ For epicardial coronary artery, it is the common cause of myocardial ischemia.² More precisely, in more than 90% of cases, ischemia is due to atherosclerosis.³ Atherosclerosis is one

type of arteriosclerosis that is developed in larger arteries and causes most cases of coronary artery disease, aortic aneurysm and arterial diseases of inferior limbs and it has an important role in cerebrovascular disease.⁴⁻⁵ In addition, ischemia leads to certain changes of electrocardiography (ECG) signal such as electrical instability that may lead to ventricular tachycardia/fibrillation, and repolarization abnormalities identified by reversing T wave and displacing ST segment.⁶⁻⁸

Analysis of ECG signal has some problems such as lack of accurate and detailed information about cardiac electrical activity in all its

1- Assistant Professor, Biomedical Engineering Department, Medical Image and Signal Processing Research Center, Isfahan University of Medical Sciences, Isfahan, Iran.

2- Associate Professor, School of Medicine, Shahid Beheshti University of Medical Sciences, Tehran, Iran.

3- Biomedical Engineering Department, Medical Image and Signal Processing Research Center, Isfahan University of Medical Sciences, Isfahan, Iran.

4- Associate Professor, Biomedical Engineering Department, Medical Image and Signal Processing Research Center, Isfahan University of Medical Sciences, Isfahan, Iran.

Corresponding author: Hossein Rabbani
E-mail: h_rabbani@med.mui.ac.ir

levels and also lack of timely representation of information in critical and fatal diseases such as ischemia. However, it is widely used due to some advantages such as low cost and availability in all medical centers.⁹ There are different methods for automatic finding of ischemic states using ECG signal including wavelet-based methods and time-frequency analysis,¹⁰⁻¹⁶ techniques that are based on neural networks¹⁷⁻¹⁹ and fuzzy systems,²⁰ methods using principal component analysis²¹ and HMM-based techniques (hidden Markov model).²² Although these methods have some advantages, they also have disadvantages such as the long time required and complexity in neural network learning or high sensitivity to noise and not timely diagnosis in some time-frequency analysis methods.

In this study, the existence of ischemia is investigated using entropy measure.²³ For this reason, 4 techniques in spatial and wavelet domains were considered to determine the optimal method having highest discrepancy between healthy subjects and patients. These methods were entropy analysis of ECG signal, entropy analysis of ECG signal in wavelet domain, entropy analysis of ST segments extracted from ECG signal, and entropy analysis of reconstructed signal using time-frequency features of ST segment in wavelet domain. The main contribution of this paper is finding a measure based on spatio-temporal analysis of ECG to determine the irregularity of ST segments. In the previous works, only some criteria such as entropy in signal domain were measured while in this study, after automatically extraction of ST segments, we tried to benefit from the advantage of spatio-temporal analysis of ECG signal to be able to calculate the irregularity of ST segments more precisely.

Methods

In this study a sample of 40 patients with mean-age of 55 ± 3 years (24 men) who had ischemic signs based on initial diagnosis of a medical practitioner (such as chest pain²⁴) were selected. Finally, a the cardiologist evaluated and confirmed the results. We recorded ECG

signals of patients at rest using 12-lead Cardiax²⁵ with sampling frequency of 500 (Figure 1) and ST deviation of 0.5 mm or variations of T-wave proposed as ischemic signs. For each signal, 10 beats were analyzed using entropy measures in order to predict who would be stress-test positive without having to undergo an exercise treadmill test (as the gold standard). To be able to evaluate these methods, exercise treadmill test was performed for all subjects that resulted in 22 cases (out of 40) with positive stress-test.

Since the entropy measure is a criterion to measure the irregularity, it can be used as a feature for distinguishing between ischemic patients (people with positive stress test) and healthy (people with negative stress test) without having to undergo a stress test. Figure 2 shows a sample ECG signal (one lead) of a patient and a healthy person. Entropy is one of the main measures used in information theory.²⁶ It is used for measuring uncertainty in random variables. The highest uncertainty indicates the highest amount of information. The entropy of a discrete variable X with probability density function $P_x(x)$ is defined as follows:

$$H(x) = -\sum_{x \in X} P_x(x) \log P_x(x) \quad (1)$$

$H(x)$ is maximized when all occurrence of an experiment have the same probability (uniform distribution) and is zero when probability of one occurrence is explicitly one (delta distribution).

Since ischemic signals have more perturbations and are more chaotic in comparison to non-ischemic signals, entropy can be used as a measure for classifying ischemic and non-ischemic patients. The entropy has been usefully applied, for example, in analyzing variation in R-R interval sequences.²⁷⁻³⁴ However, we do not know whether it can also be applied to morphologic variation across a set of ST segments extracted from sequential beats. To justify the connection between the concept of entropy as a measure of uncertainty used in information theory and its use as a measure for classifying ischemic and non-ischemic patients we used goodness of fit test.³⁵ While the good-

Patient protection:	floating common (IEC-601, BF type)
Defibrillator protection:	5 kV (max. 1 kV/msec)
Resolution:	2.44 μ V/bit (12 bit A/D)
Input impedance:	10 MOhm
CMRR:	120 dB
Filters:	150 Hz low pass (hardware, constant) 50, 100 Hz (software, switchable) 60, 120 Hz (software, switchable) 35 Hz (software tremorfilter, switchable)
Time constant:	1.6 sec
Linearity error:	<0,5%, < 1/2 LSB
Polarization voltage:	400 mV
Leads:	12 Standard + 3 Frank
Power consumption:	+ 5 V : 210 mA, +12 V : 70 mA

Figure 1. Specifications of Recorded ECG

ness of fit value for patients was 541.57 ± 36.28 , it was 882 ± 41.54 for healthy subjects illustrates the difference between uniform distribution and histogram of ECG signals of patients and healthy persons using chi-square test.³⁶ It shows that there was a significantly different degree of random variability in ischemic populations as opposed to non-ischemic ones, and that the probability distribution was more uniform in one group than the other.

In this study four states were proposed for calculation of the entropy in order to obtain the state with highest discrepancy in entropy of healthy and patient subjects. These four states included:

1) *Entropy analysis of ECG signal*

In the first part, merely analyzing ECG signal of subjects in time domain is proposed. For this reason, entropy measure of all data is calculated. General structure of this part is as follows:

- 1- Entropy measures for each lead of ECG signal are measured individually. For each signal 10 beats are analyzed using the first (1) equation.
- 2- The average of obtained values in previous step for 12 leads is considered as total entropy of each person.

3- The obtained value in previous step is compared to a threshold. If it is more/less than the threshold we consider this case as patient/healthy person.

2) *Entropy analysis of ECG signal in wavelet domain*

The principle of discrete wavelet transformation (DWT) is related to sub-band coding originally introduced in 1976.³⁷ To apply DWT, at first the signal is passed through a half band low pass digital filter with pulse response $h[n]$. Therefore, the frequency components higher than half of the highest frequency of signal are removed due to this filtering. Since the highest frequency in filter output is $\pi/2$, thus the length of signal would be halved by removing samples alternatively without losing any information. A similar procedure is performed with a half band high pass digital filter $g[n]$. Hence, in first step output of DWT are two "low pass" and "high pass" signals with decreased length (half) of original signal as follows:

$$Y_{high}[k] = \sum_n x[n]g[2k - n] \quad (2)$$

$$Y_{low}[k] = \sum_n x[n]h[2k - n] \quad (3)$$

Consequently, in this stage a time resolution is halved while frequency resolution is doubled. This procedure can be applied again on low pass sub-band and in each step,

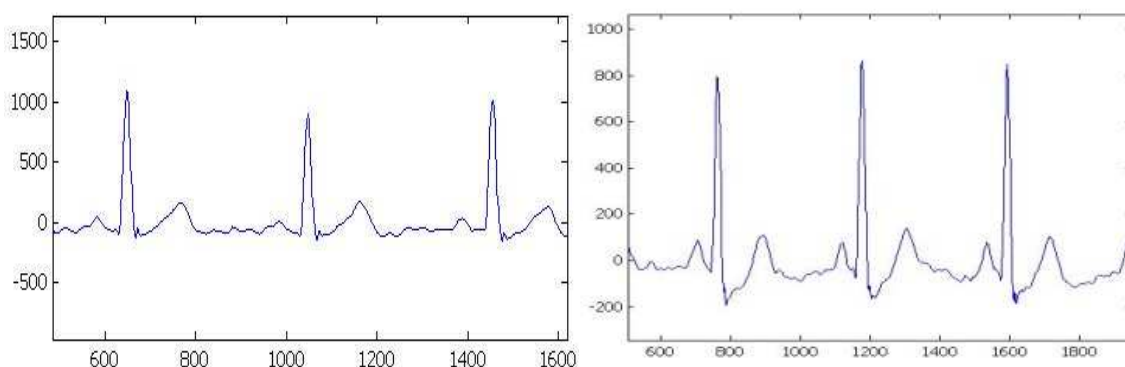


Figure 2. A Sample ECG signal of a patient (Left) and a sample ECG signal of a healthy person (Right)

frequency resolution is doubled by halving time resolution. Generally, increasing level of entropy is due to the increasing perturbation in respective area, and this increases the probability of ischemia existence in respective area.

In this part, to obtain the entropy measure, the ECG signals are transformed to DWT domain and other operations are performed on produced signals from appropriate sub-bands in this domain. The main reason of using DWT is its power for separation of various time-frequency components in its sub-bands. Accordingly, DWT is an appropriate tool for distinguishing between unnecessary components (such as noise) from signal. After applying DWT on signal (performed in 4 levels and using Daubechies wavelet 4³⁷), it is required to use one of the produced signals from appropriate sub-bands as a reference in order to perform other processing operations on this signal.¹³ In this paper, according to figure 3, the reconstructed signal merely using sub-bands of last stage is named "Approximate 1". "Approximate 2" is obtained by incorporating details of sub-band of previous stage for reconstruction, and consequently "Approximate 3" and "Approximate 4" are acquired using details of sub-bands of previous stages. The entropy is evaluated for these produced signals. The signal with higher entropy in patient subjects (indicating more perturbation) and the signal with lower entropy in healthy subjects (indicating less perturbation) are selected based on this fact that signal perturbation in

healthy people is less than signal perturbation in patients.

The main steps of proposed method in this section can be described as follows:

- 1- To apply DWT to ECG signal for each lead
- 2- To calculate the entropy of "Approximate 2" for each lead.
- 3- To average out the obtained entropy measures from leads.

The signal with average entropy higher than a threshold is defined as ischemic case based on this fact that signal perturbation in healthy people is less than signal perturbation in patients.

3) Entropy analysis of ST segments extracted from ECG signal

In this section, entropy measurement is performed with respect to ST segments extracted from ECG signals of patients and healthy subjects in order to achieve more accurate analysis of entropy. For this reason, ST segments are extracted for each lead (for each signal 10 beats are proposed) and their entropy measures are averaged (over all segments) to obtain the mean entropy for each case.

The first step in ST segment extraction is extraction of R wave. In this study adaptive threshold limit algorithm³⁸ was used for R peak detection. It is designed using a pair of threshold limits called "up limited threshold (ULT)" (Eq. 4) and "down limited threshold (DLT)" (Eq. 5). If the numbers of peaks detected by ULT and DLT in each threshold step are not equal, error component is calculated

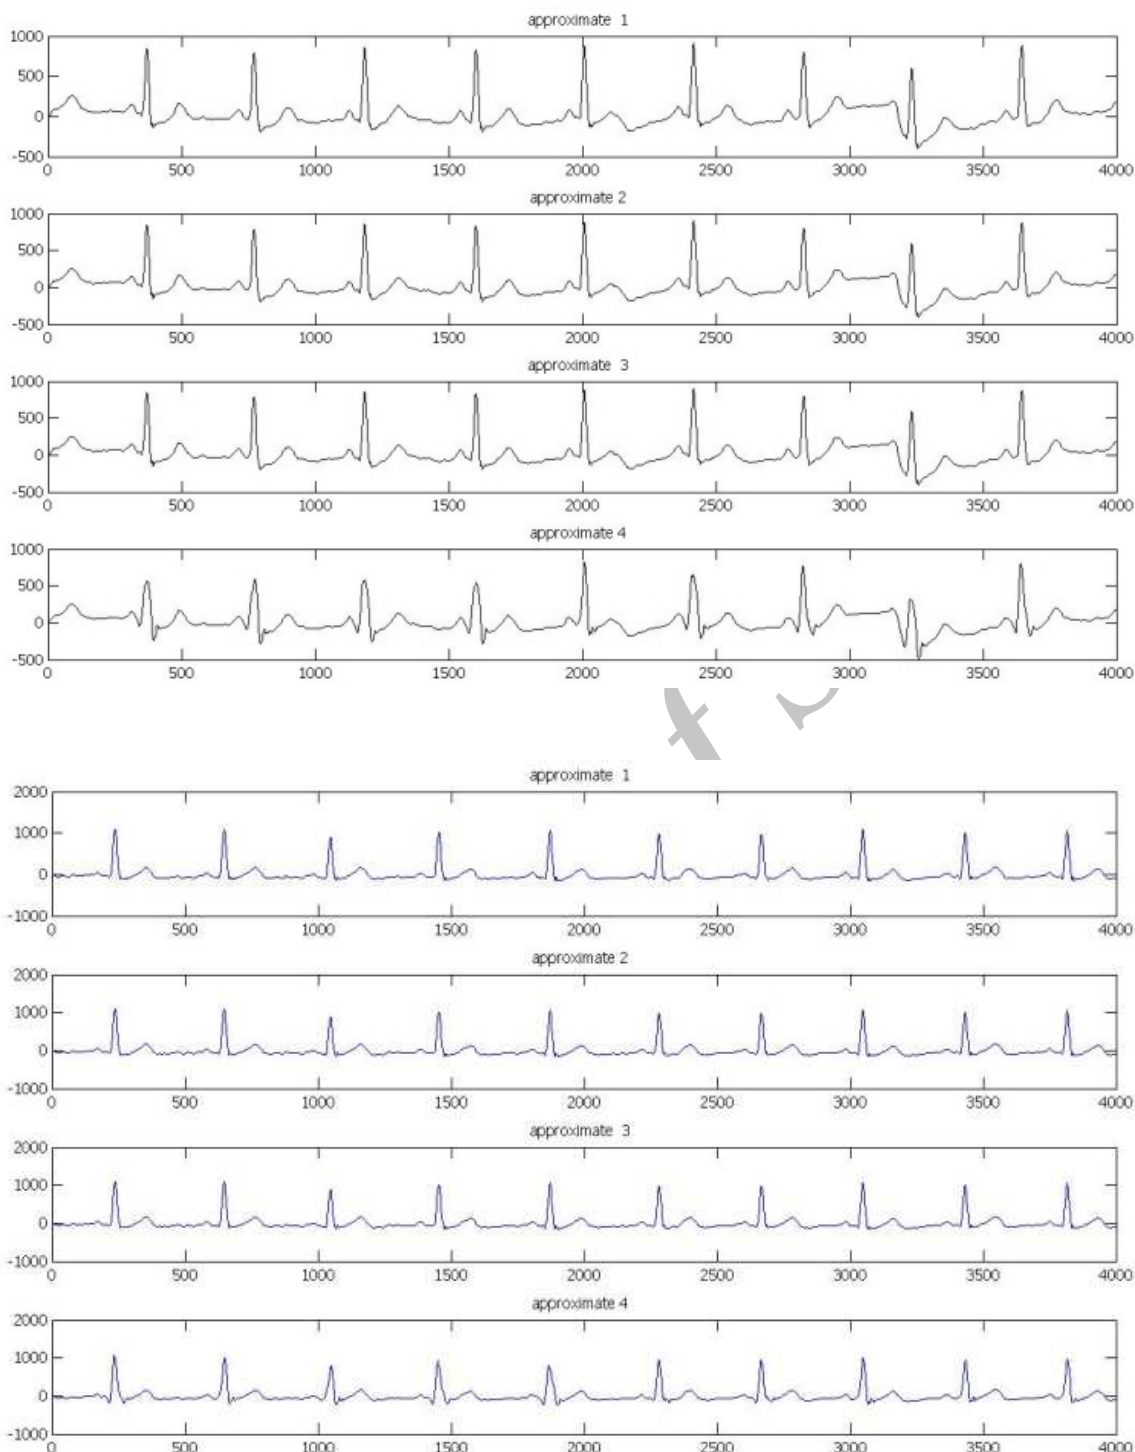


Figure 3. First four rows shows the approximate sub-bands of a patient and the next four rows illustrates the approximate sub-bands of a healthy person

and subtracted from limits and new thresholds are obtained. This repetition continues until these two limits equal and at last final threshold limit is specified.

$$TH_{m+1} = TH_m - W_m \Delta \quad (4)$$

$$TH_{f+1} = TH_f - W_f \Delta \quad (5)$$

In above equations TH_{m+1} and TH_{f+1} are modified threshold limit values, TH_m and TH_f are initial threshold limit values, and $\Delta = |TH_f - TH_m|$ is the difference between two determined limits. W_f and W_m are error weight factor which in each step have specific value

with respect to number of false detected peaks. J point detection is done after specifying R point in desired signals. Thus, after detection of these two points (points related to R wave and J point) extraction of ST segment can be performed.⁹ In this respect, after extraction of J point, 80 and 120 milliseconds after that is considered (respectively for healthy people and tachycardia patients) as the end of component (or start of T wave).³⁹ Figure 4 shows a comparison between the ST segments of a patient and healthy people.

According to our explanation in this section, the proposed method is a refinement of the first method and analyzes just the ST segment of the time-domain waveform rather than the entire beat. The main steps of proposed method can be described as follows:

- 1- Extract the ST segment of 10 beats of ECG signal of each lead.
- 2- Measure the entropy of extracted signal in previous step using (1).
- 3- Calculate the average of obtained values in previous step for all 12 leads in order to obtain the total entropy of each person.
- 4- The obtained value in previous step is compared to a threshold. If it is more/less than the threshold we consider this case as

patient/healthy person.

- 4) *Entropy analysis of reconstructed signal from time frequency features of ST segment in DWT domain*

In this section, in order to more accurate analysis of ECG signal, after transforming signal to wavelet domain, since ST segment frequency is about 30-40 Hz, second sub-band including 30-60 Hz frequencies is selected as reference sub-band.¹³ Then ECG signal is reconstructed using only filtered version of this sub-band. After signal reconstruction, entropy measure related to this signal is measured and a comparison is done between data of healthy and patient subjects. The proposed method in this section is a refinement of the second method and uses a wavelet-filtered version of the original waveforms to accentuate the ST feature. The main steps of proposed method can be described as follows:

- 1- To apply DWT to ECG signal for each lead
- 2- To reconstruct the signal using (only) filtered version of the second sub-band
- 3- To calculate the entropy of reconstructed signal in previous step for each lead
- 4- To average out the obtained entropy measures from leads

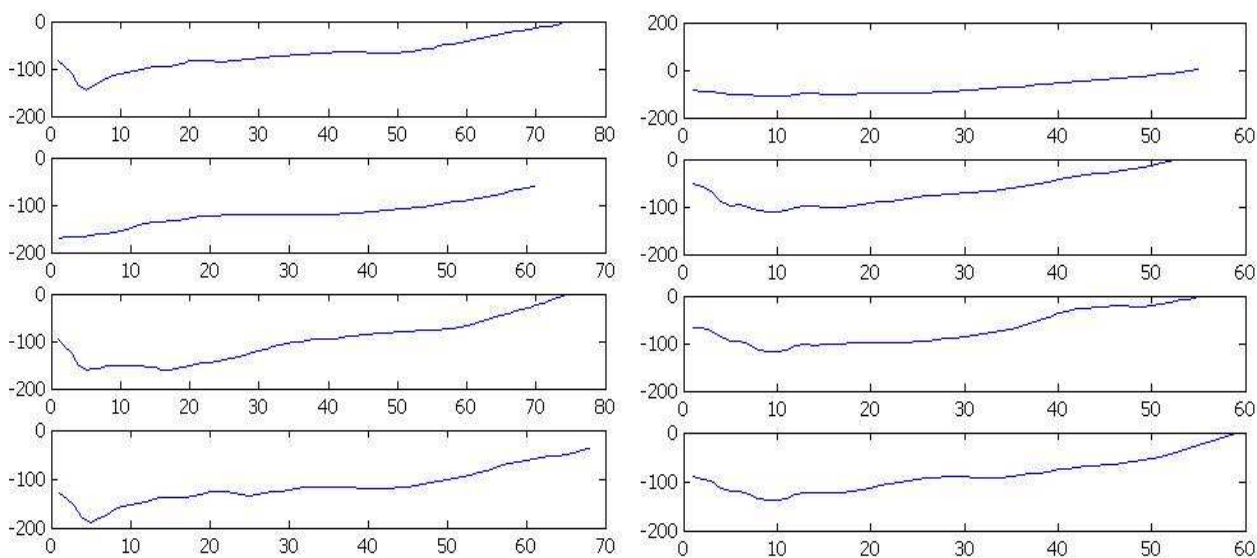


Figure 4. Extracted ST segments of 4 beats of ECG signal in a patient (Left column) and a healthy person (Right column)

The signal with average entropy higher than a threshold is selected as ischemic case based on this fact that signal perturbation in healthy people is less than signal perturbation in patients. Figure 5 illustrates a sample of reconstructed signal for a patient and a healthy person. Note that we can produce more appropriate signals according to time-frequency properties of ST segment using wavelet packet.

Results

We used a gold standard of the exercise treadmill test, with a sample of 22 patients who were stress-test positive and 18 who were normal. The goal was to predict who would be positive without having to undergo a stress test. Table 1 shows entropy measures obtained using proposed methods in this paper for both patients and healthy people. As it can be observed from the obtained results in table 1, discrepancy between obtained components from ECG signals was less than results obtained from extracted sub-bands. In addition, in ST segments extracted from signals and reconstructed signal from time-frequency properties of ST segments in wavelet domain, the average entropy obtained from healthy subjects was less than patients. Considering different states among all patients of the study, it was observed that discrepancy between components obtained with respect to first (ECG signal analysis), third (ST segments analysis) and fourth (analysis of reconstructed signal from time frequency features of ST segment in DWT domain) methods was less than results obtained from sub-bands of wavelet (second method). For methods 1 to 4, the correlation with stress test was 75, 95, 67.5 and 50, respectively. These correlation coefficients confirm this outcome by comparing the correlations between results of stress test and proposed methods in this paper for ischemia detection.

According to these findings, it can be

observed that entropy measurement for above groups suggests that since perturbation in patient's signals with positive stress test was more than subjects with negative stress test (due to existence of irregular ST segments and/or QRS complexes), obtained entropy measures had higher levels. As it can be seen in table 1, the highest discrepancy occurred in second method (entropy analysis of ECG signal in wavelet domain) and thus this method is the optimal one for ischemia diagnosis. Table 2 shows the sensitivity and specificity of all methods used in this paper. Comparing the results of this table with table 3 which shows the results of other methods introduced in other studies,^{23, 40-43} we can conclude that our methods outperformed previous techniques.

Discussion

In this paper the entropy measure is proposed as a feature for ischemia detection in order to estimate significant ST-segment deviation in exercise test. For this reason, entropy was measured using four manners, i.e. using ECG signal directly, using wavelet sub-bands of ECG signals, using extracted ST segments, and using reconstructed signal from time-frequency feature of ST segments in wavelet domain. Our simulations showed that proposed method based on wavelet sub-bands outperformed the others.

In this study we only used Daubechies wavelets. Using other transforms such as undecimated wavelet and complex wavelet⁴⁴ (that have shift invariant property) or wavelet packet (that is able to better specify time-frequency properties of ST segments) could improve the results. In addition, a similar entropy-based manner can be used for detection of other heart diseases such as myocardial infarction (MI). Moreover, we used stress-test as a gold standard. It is clear that stress-test may result in incorrect results and better evaluation could be achieved using angiography as a gold standard.

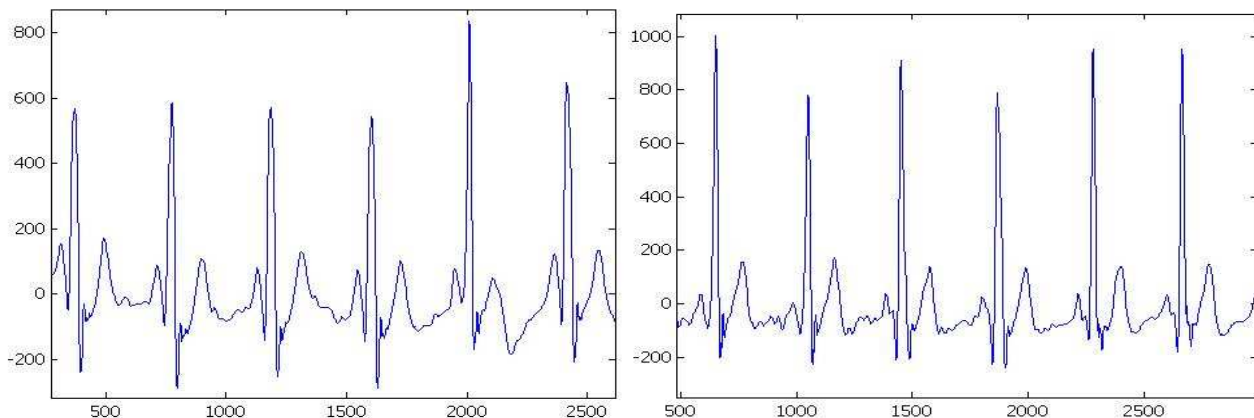


Figure 5. Reconstructed signal from time frequency features of ST segment in DWT domain of a patient and healthy person in a patient (Left), and a healthy person (Right)

Table 1. Comparison between Entropy of Proposed Methods for all participants in This Study

Method	Patient	Healthy
Entropy Analysis of ECG Signal	8.186 ± 0.010	7.710 ± 0.011
Approximate 1	8.583 ± 0.015	7.674 ± 0.018
Approximate 2	8.601 ± 0.019	7.596 ± 0.021
Approximate 3	8.435 ± 0.014	7.579 ± 0.017
Approximate 4	8.399 ± 0.021	7.911 ± 0.030
Entropy Analysis of ST Segments Extracted from ECG Signal	4.591 ± 0.016	4.253 ± 0.020
Entropy Analysis of Reconstructed Signal from Time Frequency Features of ST Segment in DWT Domain	8.963 ± 0.013	8.799 ± 0.016

Table 2. Comparison between Sensitivity and Specificity of proposed methods

Method	Sensitivity	Specificity
Method 1	81	66
Method 2	95	94
Method 3	68	66
Method 4	54	44

Table 3. Sensitivity and Specificity of the Methods used by other studies

Method	Sensitivity	Specificity
Taddei ³²	84	81
Vila ³³	83	75
Jagger ³⁴	87	88
Maglaveras ³⁵	89	78
Andreao ¹⁵	83	85

Conflict of Interests

Authors have no conflict of interests.

Authors' Contributions

EF and AF participated in most of the experiments and carried out all the experiments. HR carried out the design and coordinated the study and prepared the manuscript. AMD provide assistance in the design of the study and participated in manuscript preparation. MPM provided assistance for all experiments. All authors read and approved the content of the manuscript.

References

1. Goldschlager N, Goldman MJ. Principles of clinical electrocardiography, 1989. 13th ed. New York: Appleton & Lange; 1989. p. 225-38
2. Hurst JW, Fuster V, Walsh RA, Harrington RA. Hurst's the Heart. 13th ed. New York: McGraw-Hill Professional Publishing; 2011.
3. LaPierre D. Atherosclerosis and ischemic heart disease [Online]. 2010 [cited 2010 Jan]; Available from: URL: http://www.sharinginhealth.ca/conditions_and_diseases/atherosclerosis.html/
4. Fuster V. Atherosclerosis, thrombosis, and vascular biology. In: Goldman L, Ausiello DA, Editors. Cecil medicine. 23rd ed. Philadelphia: Saunders Elsevier; 2008.
5. Atherosclerosis. National Heart, Lung, and Blood Institute [Online]. 2010 [cited 2010 Apr 30]; Available from: URL: <http://www.nhlbi.nih.gov/>
6. Cosio FG, Palacios J, Pastor A, Nunez A. The electrocardiogram. In: Camm AJ, Lüscher TF, Serruys PW, editors. The ESC textbook of cardiovascular medicine. New Jersey: Wiley-Blackwell; 2011.
7. Faganeli J, Jager F. Automatic distinguishing between ischemic and heart-rate related transient st segment episodes in ambulatory ECG records. Computers in Cardiology 2008; 35: 381-4.
8. Bulusu SC, Faezipour M, Ng V, Banerjee S, Nourani M, Tamil LS. Early Detection of Myocardial Ischemia Using Transient ST-Segment Episode Analysis of ECG. International Journal of Medical Implants and Devices 2011; 5(2): 113-6.
9. Lei H, Chongxun Z, Ying H, Qun C. Detecting myocardial ischemia with 2-D spectrum analysis of VCG signals. IEEE Eng Med Biol Mag 1997; 16(4): 33-40.
10. Afonoso VX, Tompkins WJ. Detecting ventricular fibrillation: Selecting the appropriate time-frequency analysis tool for the application . IEEE Eng Med Biol Mag 1995; 14: 152-9.
11. Sivannarayana N, Reddy DC. Biorthogonal wavelet transforms for ECG parameters estimation. Med Eng Phys 1999; 21(3): 167-74.
12. Sakar TK, Su C, Adve A, Salazar-Palma M, Garcia-Castillo L, Boix RR. A tutorial on wavelets from an electrical engineering perspective. I. Discrete wavelet techniques. Antennas and Propagation Magazine 1998; 40(5): 49-68.
13. Lemire D, Pharand C, Rajaonah JC, Dube B, LeBlanc AR. Wavelet time entropy, T wave morphology and myocardial ischemia. IEEE Trans Biomed Eng 2000; 47(7): 967-70.
14. Vila JA, Presedo J, Femiñdez Delgado M, Barro S. Spectral analysis of HRV by means of time-frequency distributions: application to ischemia analysis. Proceedings of the 18th Annual International Conference of the IEEE Issue Date; 1996 31 Oct-3 Nov; Amsterdam, Netherlands; 1996. p. 1628-30.
15. Erfanian A, Dehghani A, Frootan A. Time-frequency analysis of the heart-rate variability during physical tests using high Resolution power spectral estimation. Proceedings of the 8th Iranian Conference on Electrical Engineering; 2001 Nov 9-10; Tehran, Iran; 2001.
16. Rezvani R, Erfanian A, Frootan A. Cohen class Time-frequency analysis of the heart-rate variability in patients suspected to myocardial Ischemia. Proceedings of the 13th Iranian Conference on Electrical Engineering; 2005 May 20-22; Zanjan, Iran; 2005.
17. Melo SL, Caloba LP, Nadal J. Arrhythmia analysis using artificial neural network and decimated electrocardiographic data. Comput Cardiol 2000; 27: 73-6.
18. Papadimitriou S, Mavroudi S, Vladutu L, Bezerianos A. Ischemia detection with a self-organizing map supplemented by supervised learning. IEEE Trans Neural Netw 2001; 12(3): 503-15.
19. Vladutu L, Papadimitiou S, Mavroudi B, Bezerianos A. Ischemia detection using supervised learning for hierarchical neural networks based on kohonen-maps. Proceedings of the 23rd Annual International Conference of the IEEE Engineering in Medicine and Biology Society; 2001 Oct 25-28; Istanbul, Turkey; 2001. p. 1688-91.

20. Gharaviri A, Teshnehlab M, Moghaddam HA. Ischemia detection via ECG using ANFIS. *Conf Proc IEEE Eng Med Biol Soc* 2008; 2008: 1163-6.
21. Stamkopoulos T, Diamantaras K, Maglaveras Z, Strintzis M. ECG analysis using nonlinear PCA neural networks for ischemia detection. *IEEE Trans Sig Proc* 1998; 46(11): 3058-67.
22. Andreato RV, Dorizzi B, Boudy J, Mota JC. ST-segment analysis using hidden Markov Model beat segmentation: application to ischemia detection. *IEEE Compu Cardiol* 2004; 381-4.
23. Cover TM, Thomas JA. *Elements of information theory*. New Jersey: John Wiley and Sons; 1991.
24. WHO. World Health Organization Department of Health Statistics and Informatics in the Information, Evidence and Research Cluster. Geneva: WHO; 2004.
25. Alicia Diagnostic [Online]. Available from: URL: <http://www.aliciadiagnostics.com/>
26. Blahut RE. *Principles and practice of information theory*. Boston: Addison-Wesley; 1987.
27. Gersch W, Lilly P, Dong E Jr. PVC detection by the heart-beat interval data - Markov chain approach. *Comput Biomed Res* 1975; 8(4): 370-8.
28. Makikallio TH, Seppanen T, Niemela M, Airaksinen KE, Tulppo M, Huikuri HV. Abnormalities in beat to beat complexity of heart rate dynamics in patients with a previous myocardial infarction. *J Am Coll Cardiol* 1996; 28(4): 1005-11.
29. Zebrowski JJ, Poplawska W, Baranowski R, Buchner T. Local time properties of 24-hour Holter recordings of R-R intervals: a nonlinear quantitative method through pattern entropy of 3-D return maps. *Computers in Cardiology* 1995; 377-80.
30. Palus M, Zebrowski JJ. Entropies, Partitionings and Heart Rate Variability [Online]. 1995; Available from: URL: <http://www.uivt.cas.cz/~mp/epr/z5-a.html>
31. Porta A, Guzzetti S, Montano N, Furlan R, Pagani M, Malliani A, et al. Entropy, entropy rate, and pattern classification as tools to typify complexity in short heart period variability series. *IEEE Trans Biomed Eng* 2001; 48(11): 1282-91.
32. Cysarz D, Bettermann H, van LP. Entropies of short binary sequences in heart period dynamics. *Am J Physiol Heart Circ Physiol* 2000; 278(6): H2163-H2172.
33. Zebrowski JJ, Poplawska W, Baranowski R. Pattern Entropy a Tool for Nonlinear Dynamical Analysis of a Biological Nonstationary System: The Human Hear. *Acta Physica Polonica B* 1995; 26(6): 1047-55.
34. Javorka M, Trunkvalterova Z, Tonhajzerova I, Javorkova J, Javorka K, Baumert M. Short-term heart rate complexity is reduced in patients with type 1 diabetes mellitus. *Clin Neurophysiol* 2008; 119(5): 1071-81.
35. Chernoff H, Lehmann EL. The use of maximum likelihood estimates in χ^2 tests for goodness-of-fit. *The Annals of Mathematical Statistics* 1954; 25(3): 579-86.
36. Snedecor GW, Cochran WG. *Statistical methods*. New Jersey: Wiley-Blackwell; 1989.
37. Chui CK. *An introduction to wavelets*. London: Academic Press; 1992.
38. Xu X, Liu Y. Adaptive Threshold for QRS Complex Detection Based on Wavelet Transform. *Conf Proc IEEE Eng Med Biol Soc* 2005; 7: 7281-4.
39. Li XY, Wang T, Zhou P, Feng HQ. ST-T Complex Automatic Analysis of The Electrocardiogram Signals Based on Wavelet Transform. *IEEE Eng Med and Biol* 2003; 16(2): 144-5.
40. Taddei A, Costantino G, Silipo R, Emdin M, Marchesi C. A System for the Detection of Ischemic Episodes in Ambulatory ECG. *Computers in Cardiology* 1995 1995; 705-8.
41. Vila J, Presedo J, Delgado M, Barro S, Ruiz R, Palacios F. SUTIL: intelligent ischemia monitoring system. *Int J Med Inform* 1997; 47(3): 193-214.
42. Jager F, Moody GB, Mark RG. Detection of transient ST segment episodes during ambulatory ECG monitoring. *Comput Biomed Res* 1998; 31(5): 305-22.
43. Maglaveras N, Stamkopoulos T, Pappas C, Strintzis MG. An adaptive backpropagation neural network for real-time ischemia episodes detection: development and performance analysis using the European ST-T database. *IEEE Trans Biomed Eng* 1998; 45(7): 805-13.
44. Selesnick IW, Baraniuk RG, Kingsbury NG. The Dual-Tree Complex Wavelet Transform. *IEEE Signal Processing Magazine* 2005; 22(6): 123-51.