

\*

( // // )

( )

ASCE52

230Kv

( )

( )

[ ]

Archive of SID

( ) [ ]

Beta

Visual Basic

Excel

[ ]

( )

[ ]

230Kv

3.5

( )

6.5

[ ] [ ] [ ] [ ]

( )


( )

( )

[ ]

( )

(.)

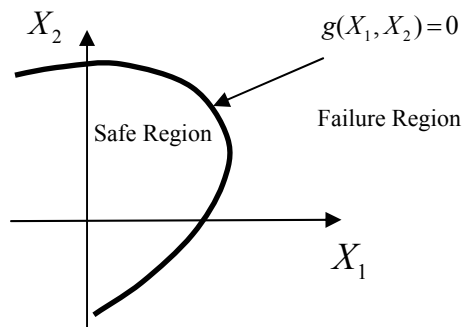



$N ( )$

" )

(

"



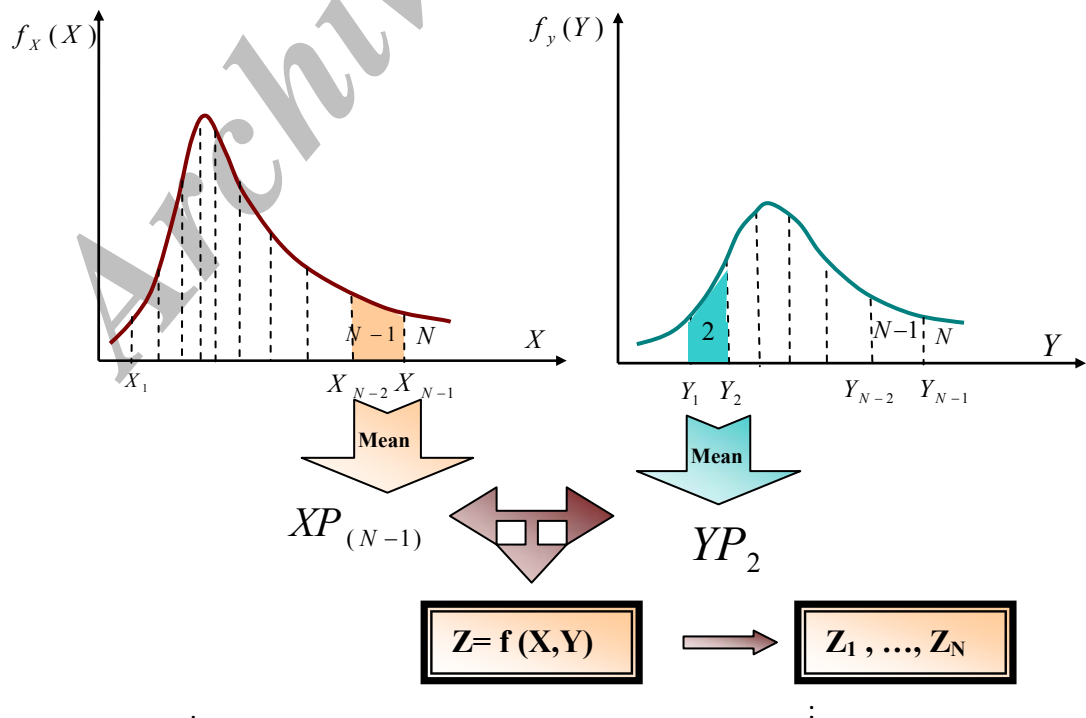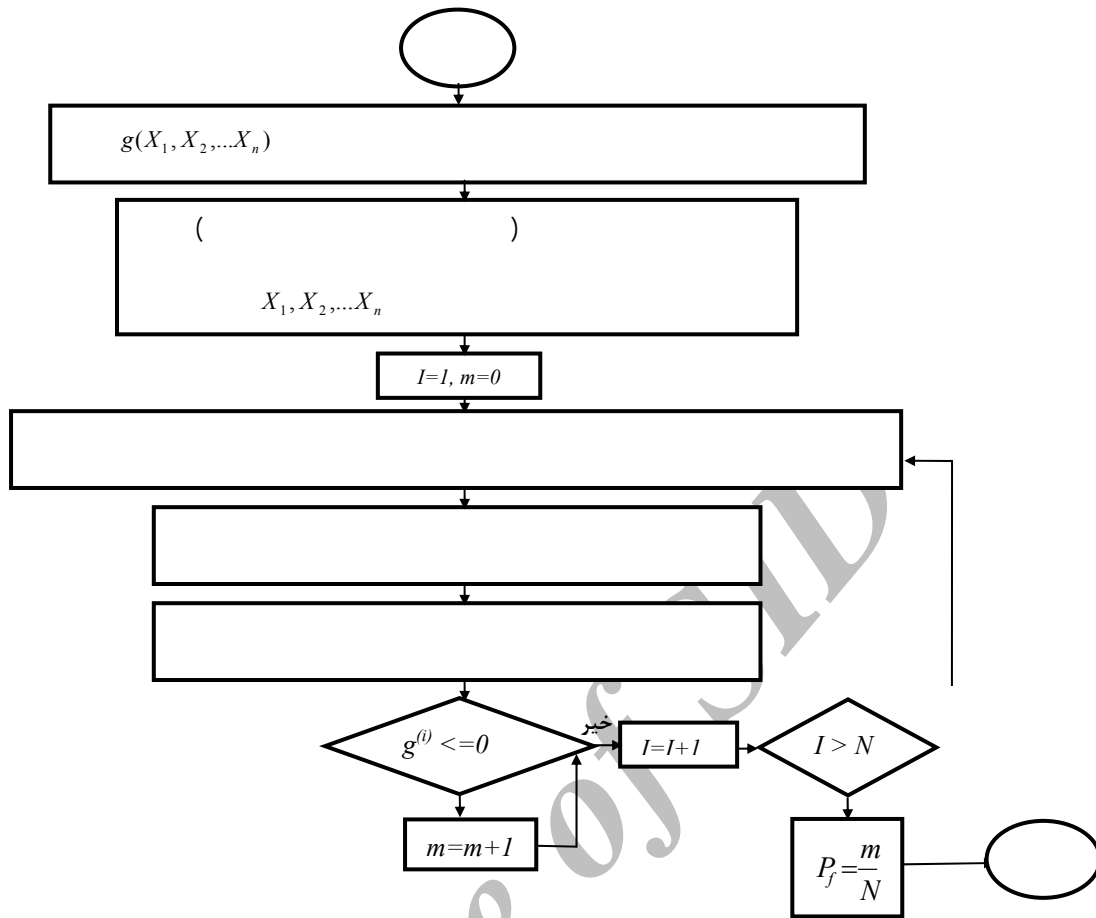

[.]

)

(

N


(.)

1/N

( - )

$$g(X) = 0$$

[ ] ( )

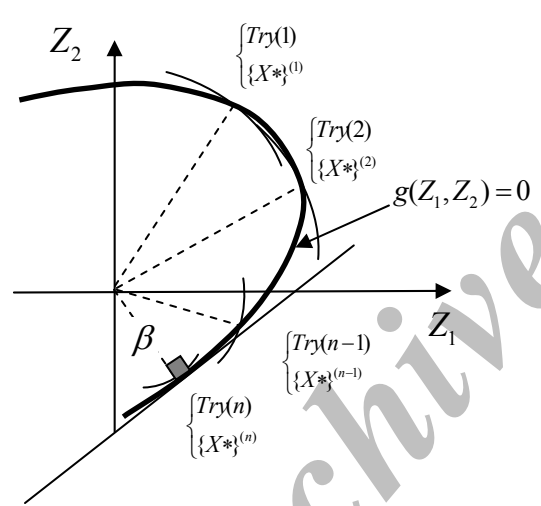

$$Z = f(X_1, X_2, \dots, X_K)$$

( )

$$\text{Estimated mean value of } Z = \bar{Z} = \frac{1}{N} \sum_{i=1}^N z_i$$

( )

$$\text{Estimated } m^{\text{th}} \text{ moment of } Z = \frac{1}{N} \sum_{i=1}^N (z_i)^m$$

( )

$$P_{\text{failure}} = \frac{\text{number of times } z_i \leq \bar{Z}}{N}$$

( )

[ ] [ ]

( )

$$Z_i^* = \frac{X_i^* - \mu_{X_i}^e}{\sigma_{X_i}^e} \quad (1)$$

$$Z_i^* = \frac{X_i^* - \mu_{X_i}^e}{\sigma_{X_i}^e} \quad (2)$$

$$F_{Yn} - \sigma_{(Total\ Tension)} \leq 0 \quad (3)$$

$$F_{Crn} - \sigma_{(Total\ Compression)} \leq 0 \quad (4)$$

$$F_{Yn}, F_{Crn} \quad (5)$$


$$\sigma_{(Total\ Compression)}, \sigma_{(Total\ Tension)} \quad (6)$$

$$\mu_{X_i}^e = X_i^* - \sigma_{X_i}^e [\Phi^{-1}(F_X(X^*))] \quad (7)$$

$$\sigma_{X_i}^e = \frac{1}{f_X(X^*)} \phi\left(\frac{X_i^* - \mu_{X_i}^e}{\sigma_{X_i}^e}\right) = \frac{1}{f_X(X^*)} \phi[\Phi^{-1}(F_X(X^*))] \quad (8)$$

(L.H.S)

100 (L.H.S)

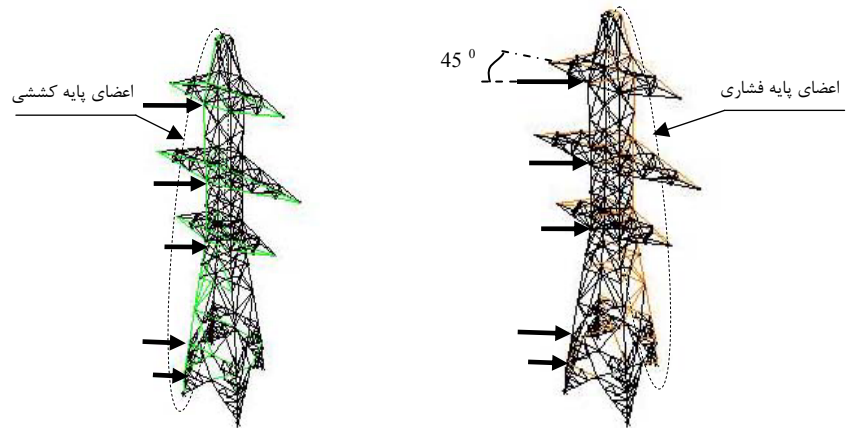

( ) ( )  
 ( ) ( )  
 ( ) :

$(\beta)$				( )
		( )		
				( )
2.13	6.43	1.87	4.09	( )
2.25	6.04	2.03	3.84	( )
1.60	6.96	1.92	4.52	( )
1.69	6.55	1.69	4.56	( )
6.5		4.25		

(( ) )

230Kv

( )

230Kv

( ) (Baker )  
[ ]

(( ) )

[ ]

j

$S^{(j)}$

( )

( )

S

[ ]

$$S^{(j)} = \sum_{i=1}^N (\log_{10} P_{fT} - \log_{10} P_{fj})^2 \cdot w_i$$

( )

$$\gamma_i = \frac{x_i^*}{\bar{X}_i}$$

( )

:  $S^{(j)}$

$\beta_T$

:  $P_{fT}$

$\beta_T$

( )

[ ] [ ]

:  $P_{fj}$

j

( $\beta_i$ ) i

i

:  $w_i$



Normalized Factor		Load Factor	Resistance Factor	S <sub>min</sub>		
Load Factor	Resistance Factor					
1.40	0.86	1.37	0.84	27.08		
1.40	0.94	1.32	0.89	47.22		
1.40	0.80	1.40	0.80	31.85		
1.40	0.98	1.29	0.93	34.98		
1.40	0.75	1.38	0.74	24.11		
1.40	0.91	1.26	0.82	37.73		
1.40	0.81	1.33	0.77	26.13		
1.40	0.94	1.28	0.86	52.62		

230Kv

( )  
(

Archive of SID

( ) ( ) ( )

( )

( ) [ ]

S<sup>(0)</sup>


( - ) ( - )

: -

S.F <sub>W</sub>					S.F <sub>T</sub>					S.F <sub>V</sub>		
W.L.	I.L.	D.L.	I.L.	D.L.	W.L.	I.L.	D.L.	I.L.	D.L.	S.F <sub>W</sub>	S.F <sub>T</sub>	S.F <sub>V</sub>
2.48	1.73	1.1	1.58	1.1	2.48	1.73	1.1	1.58	1.1	2.50	1.65	1.50
1.06	1.28	1.1	1.28	1.1	1.09	1.28	1.1	1.28	1.1	1.10	1.10	1.10
1.17	1.16	1.1	1.16	1.1	1.11	1.16	1.1	1.16	1.1	1.10	1.10	1.10

: -

S.F <sub>W</sub>					S.F <sub>T</sub>					S.F <sub>V</sub>		
W.L.	I.L.	D.L.	I.L.	D.L.	W.L.	I.L.	D.L.	I.L.	D.L.	S.F <sub>W</sub>	S.F <sub>T</sub>	S.F <sub>V</sub>
2.42	1.73	1.1	1.30	1.1	2.66	1.66	1.1	1.51	1.1	2.50	1.65	1.50
1.06	1.28	1.1	1.03	1.1	1.17	1.20	1.1	1.20	1.1	1.10	1.10	1.10
1.14	1.16	1.1	1.02	1.1	1.26	1.11	1.1	1.11	1.1	1.10	1.10	1.10

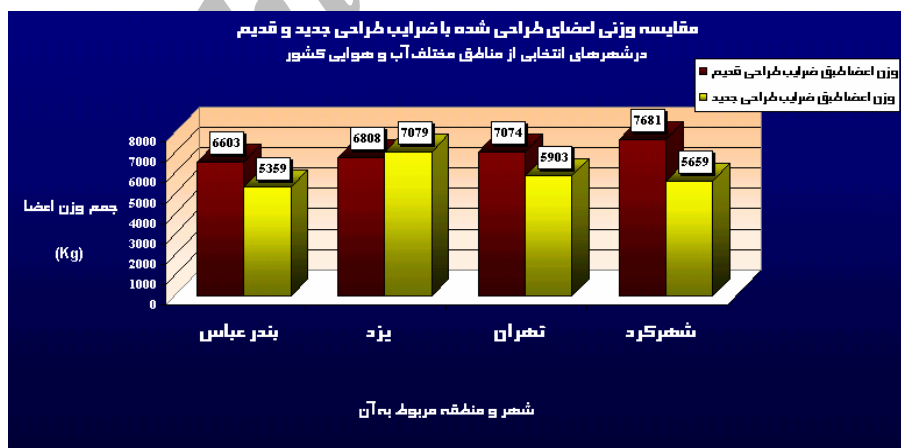

:

(D.L.)

(W.L.)

(I.L.)


SF<sub>T</sub>

SF<sub>V</sub>

( )

230Kv SF<sub>w</sub> .  
 [ ]  
 (%)  
 %

230Kv  
 )  
 ( )  
 Beta )  
 ( )

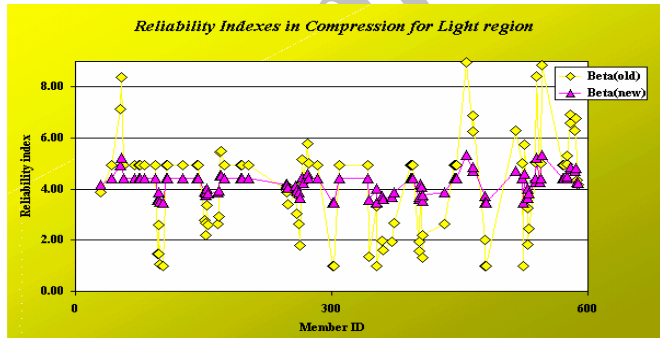

( )  
 ( ) :

(β)				
		( )		
0.33	6.49	0.44	4.21	( )
0.35	6.43	0.48	4.15	( )
0.25	6.57	0.45	4.31	( )
0.26	6.51	0.40	4.32	( )



- 
- 9 - Pay rot, A. H. and Dagher, H. J. (1984). *Reliability – Based Design of Transmission Lines*, This paper is part of the journal of structural Engineering, Vol .110, No .11.
- 10 - IEC – 826 Standard, (1998). "Loading and strength of overhead transmission – lines." *International Electro technical Commission*.
- 11 - Cho, H. N. and Lee, S. J. (1991). *Reliability – Based Design of Transmission Towers Under Wind and Ice Loading*.
- 12 - Bathon, L., Mueller, W. H. and Kempner, L. (1992). "Ultimate Load Capacity of Single Steel Angles." *this paper is part of the Journal of Structural Engineering*, Vol. 199, No.1, January 1993.
- 13 - Ranganathan, R. (1990). *Reliability Analysis and Design of Structures*, Tata Mc Graw-Hill Co. Civil Engineering Dept., I.I.T., Bombay.
- 14 - Dagher, H. J. (1999). *Reliability of Poles in NESC Grade C Construction*, University of Maine, Orono, ME 04469-5793.
- 15 - Rackwitz, R. and Fiessler, B. (1978). "Structural reliability under combined random load sequences." *Computers & Structures*, PP.489-494.
- 16 - Hart, G. C. (1982) *Uncertainty Analysis; Load, and Safety in Structural Engineering*, Prentice- Hall, Inc, Englewood Cliffs, N.Y.
- 17 - Sorensen, J. D. (2001). *Calibration of Partial Safety Factors in Danish Structural Codes*, University of Aalborg (Denmark). JCSS Workshop on Reliability Based Code Calibration.
- 18 - Sorensen, J. D. and Faber, M. H. (2002). *Reliability Based Code Calibration*, Joint Committee on Structural Safety.
- 19 - Gulvanessian, H. and Holicky, M. (2001). *Reliability Based Calibration of Eurocodes Considering a Steel Member*, JCSS Workshop on Reliability Based Code -Calibration.
- 20 - SAKO, (1999). Sako: *Probabilistic Calibration of Partial Safety Factors in the Euro-Codes*.

1 - Target Reliability Index  
3 - Design Factors  
5 - RACKWIT-FIESSLERZ  
7 - Limit State Function  
9 - Importance Sampling Method  
11 - HASOFER-LIND METHOD  
13 - Load and Resistance Factors  
15 - Weight factor

2 - Load and Resistance Factors  
4 - MONTE - CARLO METHOD  
6 - Failure  
8 - Nowak  
10 - Latin Hypercube Sampling  
12 - Reliability Index  
14 - Design Point