

*

(// // //)

Archive of SID

[]

[]

Westergaard

Chopra [] .

[]

Zangar and Haefei

Zienkiewicz and Nath

Saini et al. [] . []

Hall and [] Chopra and Chakrabarti []

Kotsubo [] .

[] Fennes and Chopra [] Chopra

Lotfi et al. Bustamante et al. [] .

Bouaanani et al. []

$$M\ddot{u} + C\dot{u} + Ku = F(t)$$

()

$$\begin{matrix} K & C & M \\ u & \dot{u} & \ddot{u} \end{matrix}$$

Feneves and Chopra []

$F(t)$

\ddot{u}_g

$$F(t) = -M \{r\} \ddot{u}_g$$

n n × 1 r

Lotfi and Tassoulas []

Medina et al. []

n × 2 r

[]

Kucukarslan

K C M

$$P = -K_B e$$

()

K_B

e

P

()

Wilson & Khalvati []

$$K_w = \int_V B^T D_w B dv$$

()

D_w



B

[]

$$D_w = \begin{bmatrix} K_B & 0 \\ 0 & 100 * K_B \end{bmatrix}$$

()

100 * K_B



$$H = \int_{\Gamma} \nabla^T N \nabla N \, d\Gamma; \quad Q^T = \int_{s_4} N^T n \bar{N} \, ds$$

()

$$E = \begin{matrix} P \\ E_2 & E_1 \end{matrix} \quad \delta$$

s_4, s_2, s_1

A

()

()

A_2
 \bar{N}

A_1

H
 N

$$K_L = K_w + S_f$$

$$C_L = C_{L_1} + C_{L_2}$$

(

[]

Visual

) C++

(C++.NET 2003

[]

() ()

$$\begin{bmatrix} M & 0 \\ \rho \cdot Q^T & E \end{bmatrix} \begin{Bmatrix} \ddot{\delta} \\ \ddot{P} \end{Bmatrix} + \begin{bmatrix} C & 0 \\ 0 & A \end{bmatrix} \begin{Bmatrix} \dot{\delta} \\ \dot{P} \end{Bmatrix} + \begin{bmatrix} K & Q \\ 0 & H \end{bmatrix} \begin{Bmatrix} \delta \\ P \end{Bmatrix} + \begin{Bmatrix} M \cdot \ddot{u}_g \\ \rho \cdot Q^T \cdot \ddot{u}_g \end{Bmatrix} = 0$$

[]

()

$$E = E_1 + E_2; \quad E_1 = \frac{1}{C_w} \int_{\Gamma} N^T N \, d\Gamma$$

$$E_2 = \frac{1}{g} \int_{s_3} N^T N \, ds; \quad A = A_1 + A_2$$

$$A_1 = \frac{1}{C_w} \int_{s_1} N^T N \, ds; \quad A_2 = \frac{1}{\beta C_w} \int_{s_2} N^T N \, ds$$

$$\Delta t = 0.01s \quad \alpha = 0.2$$

()

H

H

[]

Westergard

[]

$$\rho = 1000 \text{ kg/m}^3$$

$$K_B = 2.07 \times 10^9 \text{ N/m}^2$$

$$\rho = 2400 \text{ kg/m}^2$$

$$E = 2.275 \times 10^{10} \text{ N/m}^2$$

$$\xi = 5\%$$

$$\nu = 0.2$$

()

() H

$$a_g = \alpha g \cos\left(\frac{2\pi t}{T_S}\right)$$

t ω g

Westergard [1]

$$P = \frac{8\alpha\rho g H}{\pi^2} \cos\left(\frac{2\pi}{T_S}\right) \sum_{n=1,3,5}^{\infty} \frac{1}{n^2 C_n}$$

$$e^{-q_n x} \sin \frac{n\pi y}{2H}$$

L < 3H

3H

()

$$T_S C_n = \sqrt{1 - \frac{16H^2}{n^2 C_w^2 T_S^2}}, q_n = \frac{n\pi C_n}{2H}$$

() y x

/ / /

Δt

(

/ /

.3H

/

()

()

()

$L=3H$ $\omega =$

()

S69E $\beta = \infty$ β ()

- Taft1952 $L=3H$

Pine Flat

($\beta = \infty$)

g g


Pine ()

Taft 1952 Flat

s Pine Flat


Pine Flat

()

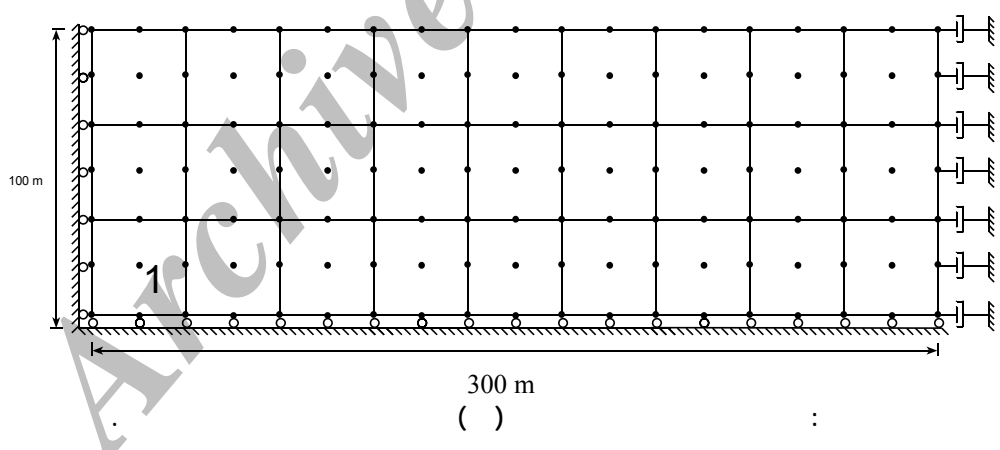


[]

L	ω rad / sec	Relative error			
		H=50,m		H=100,m	
		Lagrangian method	Eulerian method	Lagrangian method	Eulerian method
H	10	-36.7	14.7	-33.7	11
2H	10	-8.1	3	-8.5	1.9
3H	10	1.4	2.14	-2	-0.036
H	20	-33.6	9.7	-40.1	-13.5
2H	20	-8.8	1.1	-11.9	-3.6
3H	20	0.05	0.25	-3.8	0.5

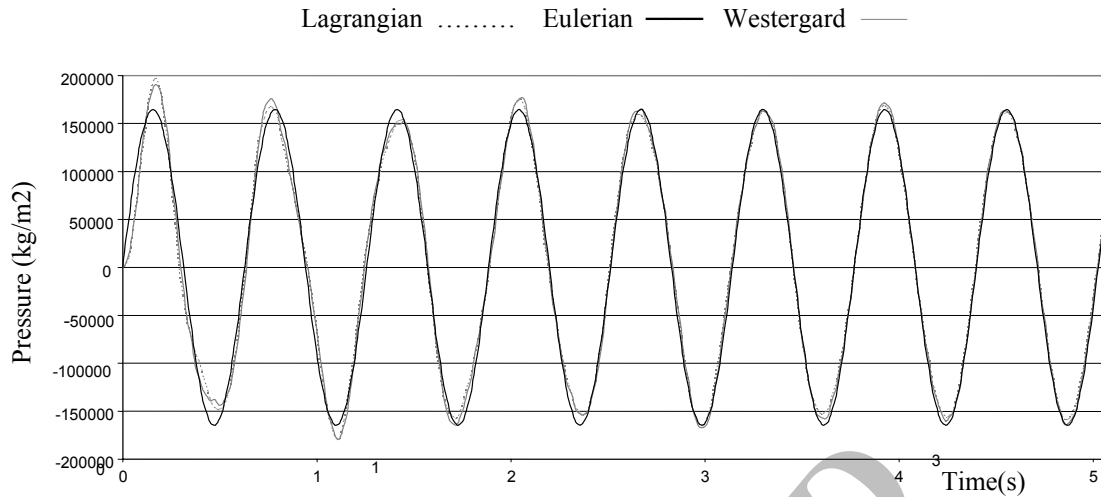

() :
 $\omega = 10 \text{ rad/s}$

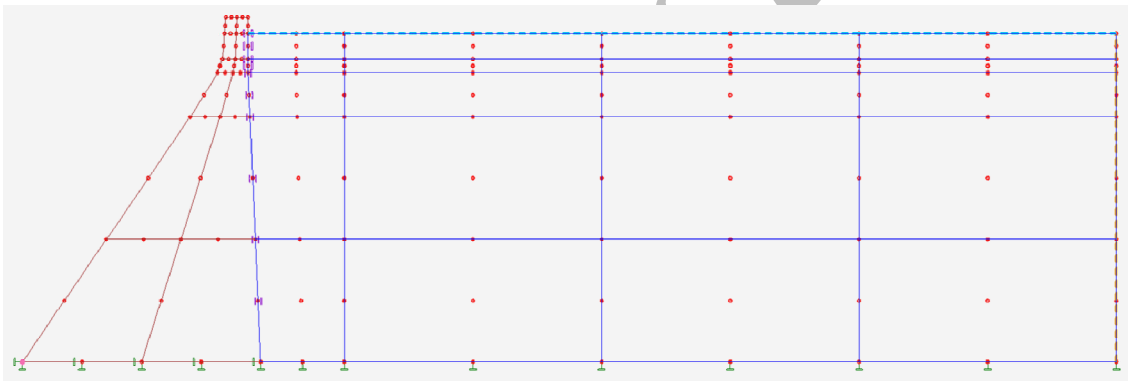

Pine Flat :

L_V L_H
 E_V E_H - / / / - /
 E_{VP} E_{HP} L_{VP} L_{HP} [] Taft 1952
- / /

Taft1952

() β
() $\beta = 9$

%

)

(

(

Pine Flat

Pine Flat

)

(

Taft 1952

(

()

$\beta = 9$


(

()

Pine Flat

(a)

Lagrangian Eulerian —

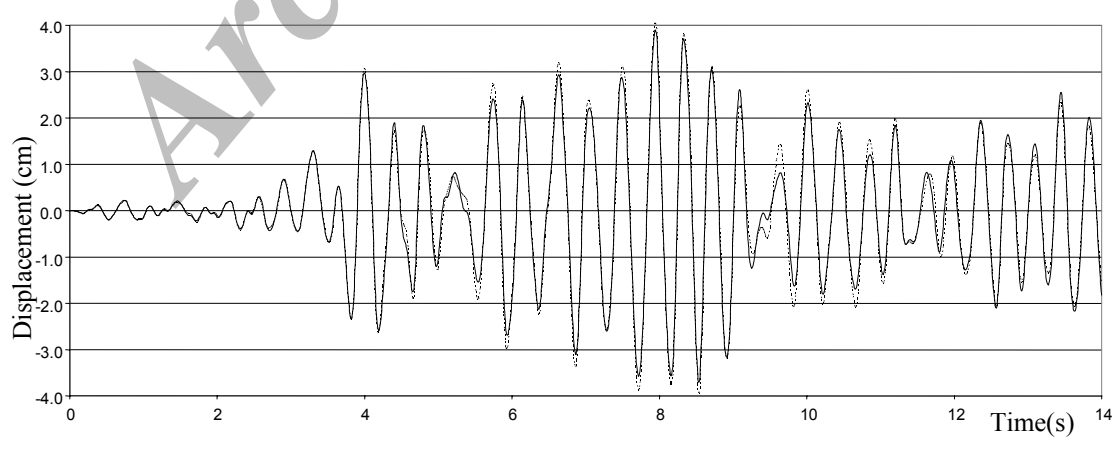

()


() S69E

()

Pine Flat

:

(b)

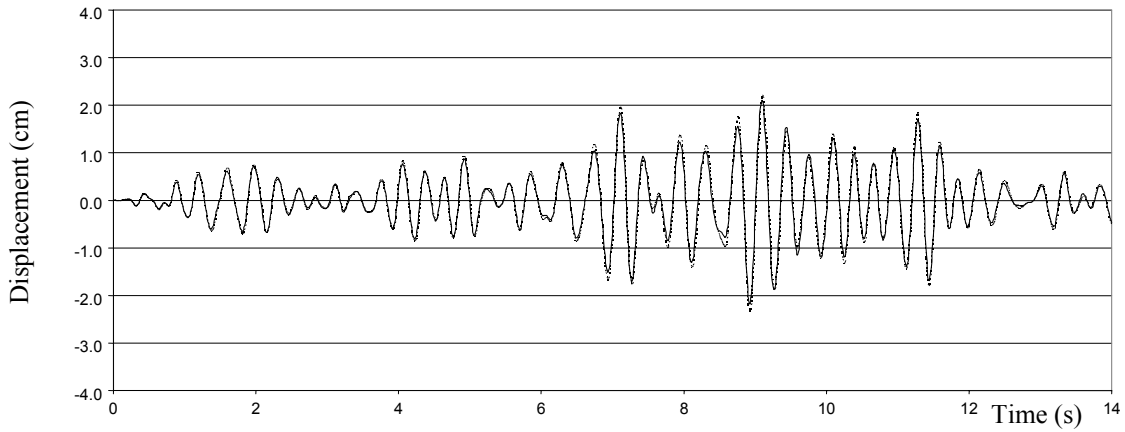


() () S69E () Pine Flat :

Pine Flat :


β	$L_H (mm)$	$L_{HP} (%)$	$E_H (mm)$	$E_{HP} (%)$	$L_V (mm)$	$L_{VP} (%)$	$E_V (mm)$	$E_{VP} (%)$
∞	40.5	0	39.0	0	22.1	0	21.0	0
20	40.0	-1.2	37.9	-2.7	18.0	-18.5	17.1	-18.5
9	39.2	-3.2	36.9	-5.5	15.9	-28.4	14.3	-32.1
3	35.7	-11.8	33.3	-14.6	10.3	-53.5	9.3	-55.8

(a)

Lagrangian Eulerian —

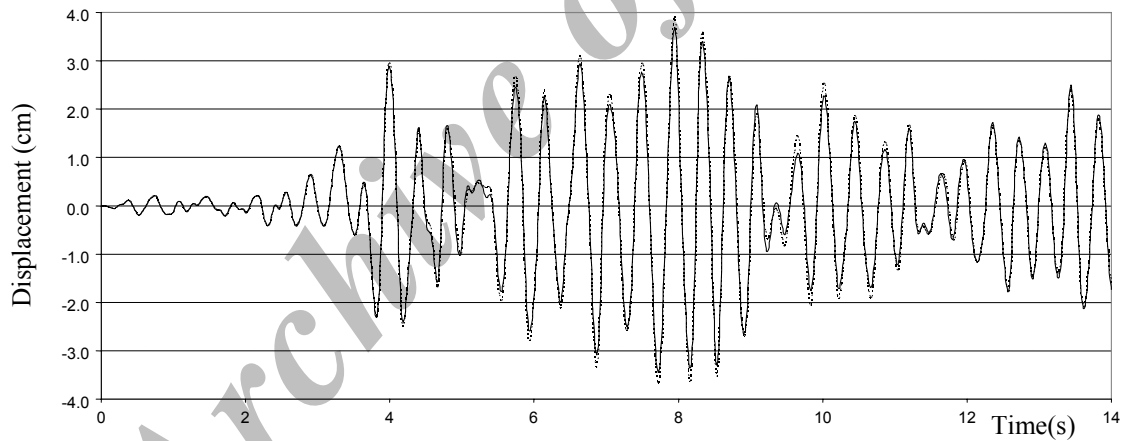

(b)

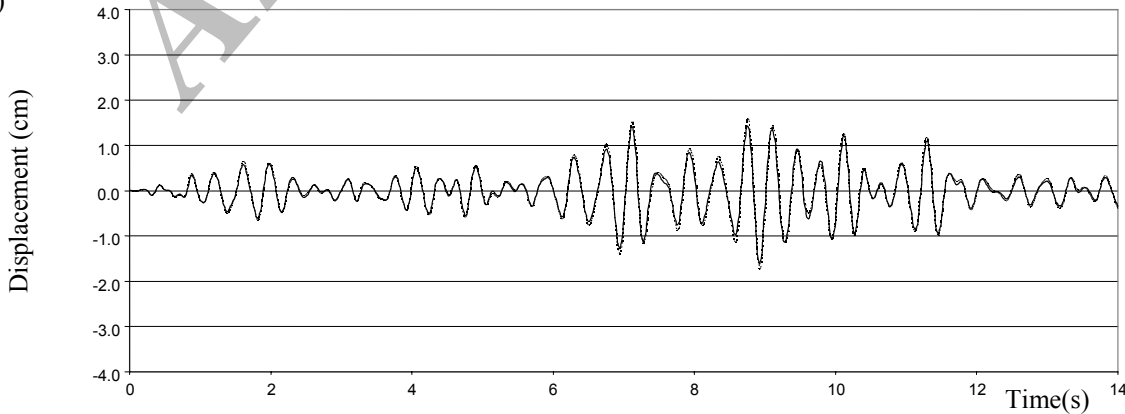

() () S69E () Pine Flat :

$\beta = 9$

Pain Flat

Slope of reservoir bed (%)	$L_H (mm)$	$L_{HP} (%)$	$E_H (mm)$	$E_{HP} (%)$	$L_V (mm)$	$L_{VP} (%)$	$E_V (mm)$	$E_{VP} (%)$
0	39.2	0	36.9	0	15.9	0	14.3	0
4	36.1	-7.8	34.0	-7.9	15.5	-2.2	14.4	1.1
8	35.7	-8.9	33.4	-9.3	16.3	-2.8	14.7	3.3

Pain Flat

Slope of upstream face of dam (%)	$L_H (mm)$	$L_{HP} (%)$	$E_H (mm)$	$E_{HP} (%)$	$L_V (mm)$	$L_{VP} (%)$	$E_V (mm)$	$E_{VP} (%)$
Vertical	65.9	0	61.0	0	16.8	0	16.6	0
5	33.5	-49.2	31.6	-48.2	13.6	-18.9	13.3	-19.5
10	28.6	-56.6	27.2	-55.3	15.8	-5.8	15.7	-5.5
15	28.3	-57.0	27.9	-54.3	15.0	-10.5	14.6	-12.2


Pain Flat

Slope of upstream face of dam (%)	$L_H (mm)$	$L_{HP} (%)$	$E_H (mm)$	$E_{HP} (%)$	$L_V (mm)$	$L_{VP} (%)$	$E_V (mm)$	$E_{VP} (%)$
Vertical	65.7	0	60.7	0	16.9	0	16.7	0
5	53.1	-19.2	48.6	-19.9	16.1	-4.9	16.4	-1.8
10	42.8	-34.7	40.0	-34.2	15.9	-5.7	15.8	-5.6
15	35.8	-45.4	33.8	-44.3	14.8	-12.6	14.7	-11.8


Pain Flat

Reservoir depth	Earthquake component acceleration	Maximum displacement of dam crest in Lagrangian method	Different w.r.t. the full reservoir in Lagrangian method (percent)	Maximum displacement of dam crest in Lagrangian method	Different w.r.t. the full reservoir in Eulerian method (percent)
Full	Horizontal	39.2	0	36.9	0
2/3		35.7	-8.9	35.1	-4.7
1/3		30.9	-21.0	30.9	-16.2
0		30.6	-21.9	30.6	-17.1
Full	Vertical	14.5	0	14.3	0
2/3		3.7	-74.6	3.6	-74.7
1/3		4.1	-71.6	4.1	-71.0
0		5.1	-65.1	5.1	-64.5


(a) Lagrangian Eulerian —

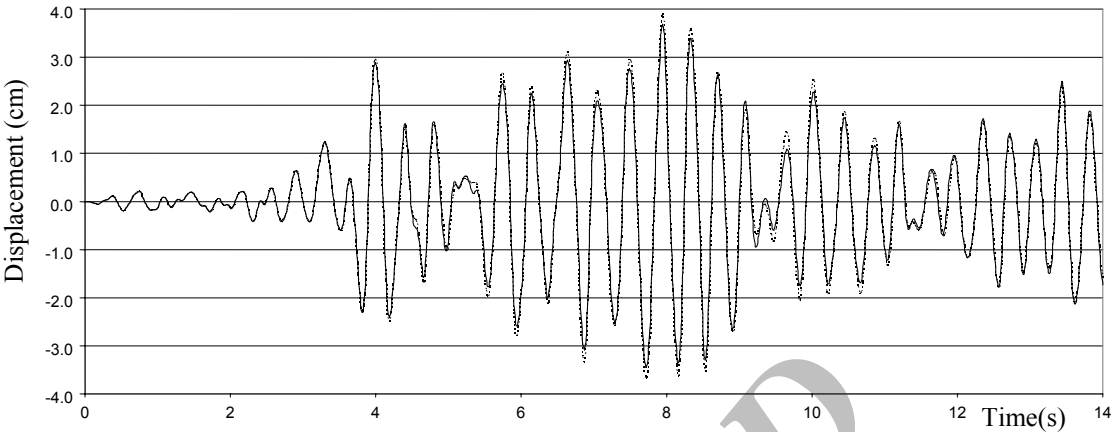

(b)

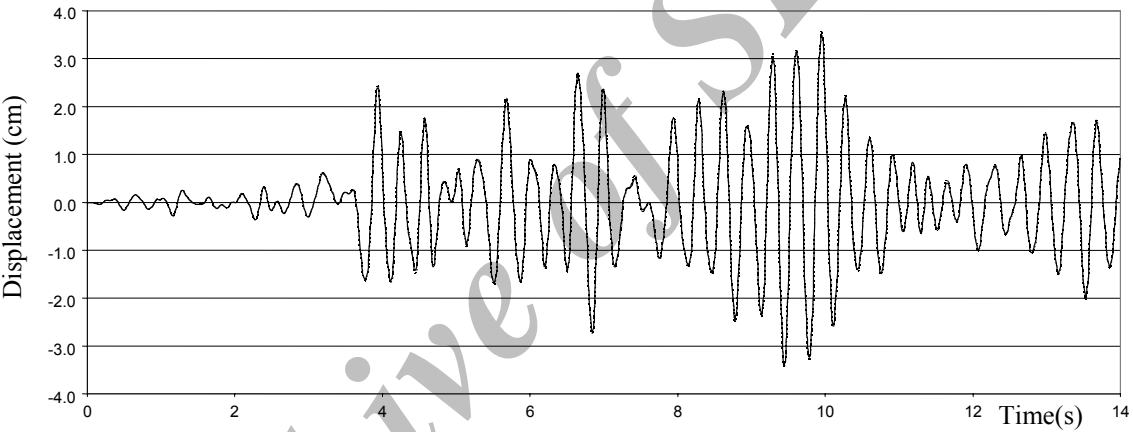


(c)

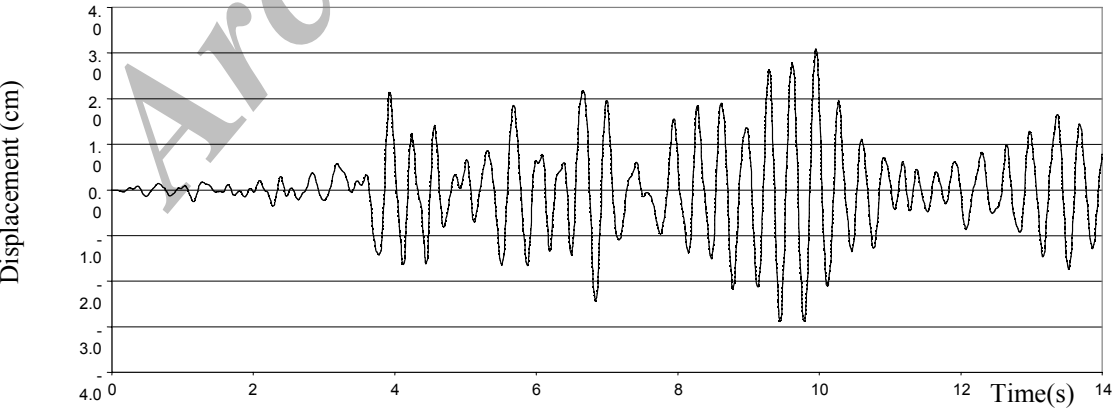


S69E () Pine Flat :
() () () () $\beta = 9$

(d)

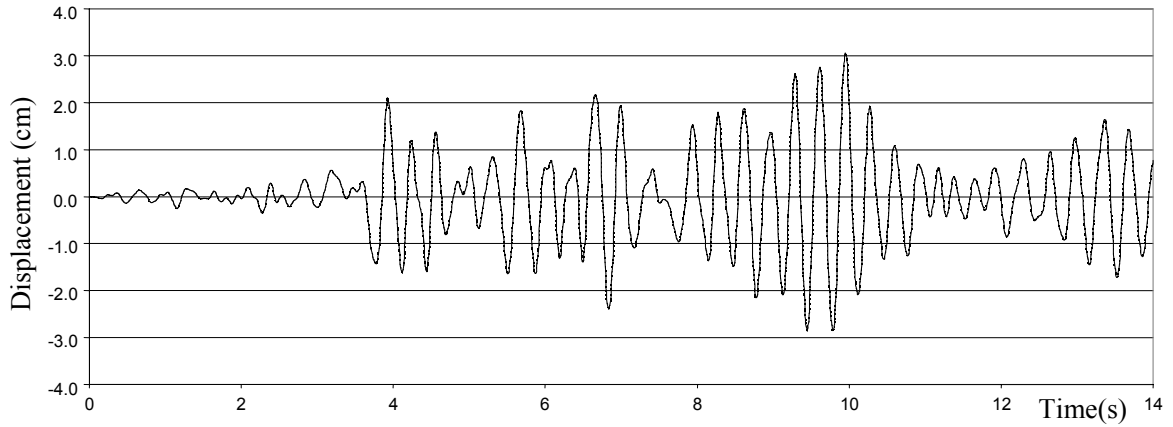


S69E () Pine Flat :
() () () () $\beta = 9$

(a)

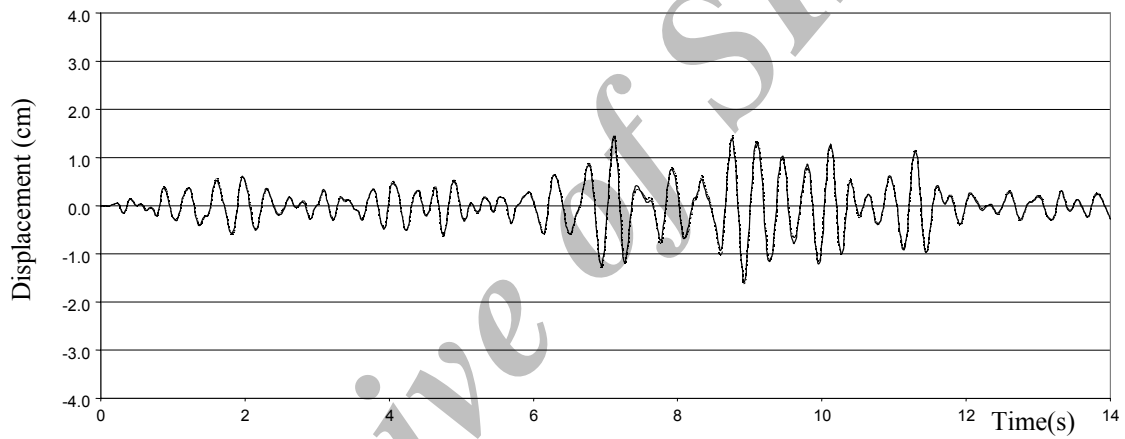


(b)

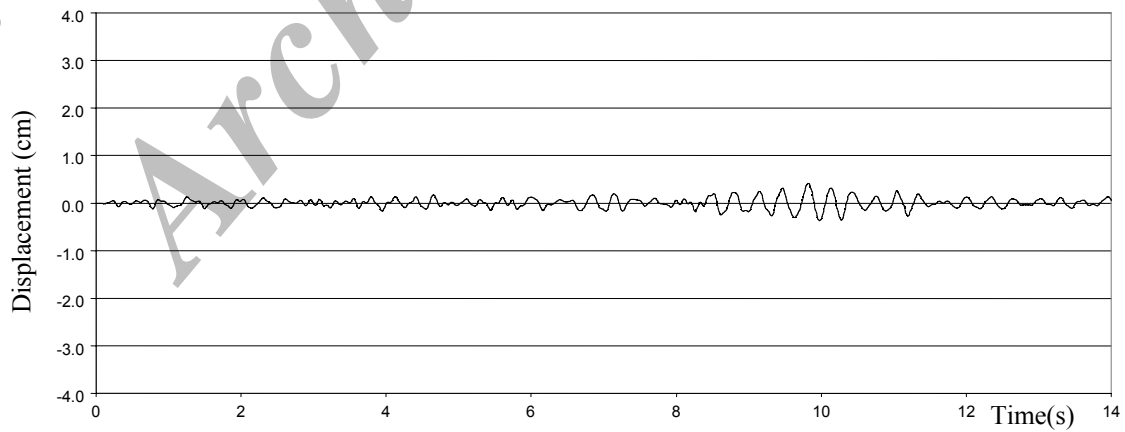


$\beta = 9$ () Pine Flat :
() () () ()

(c)

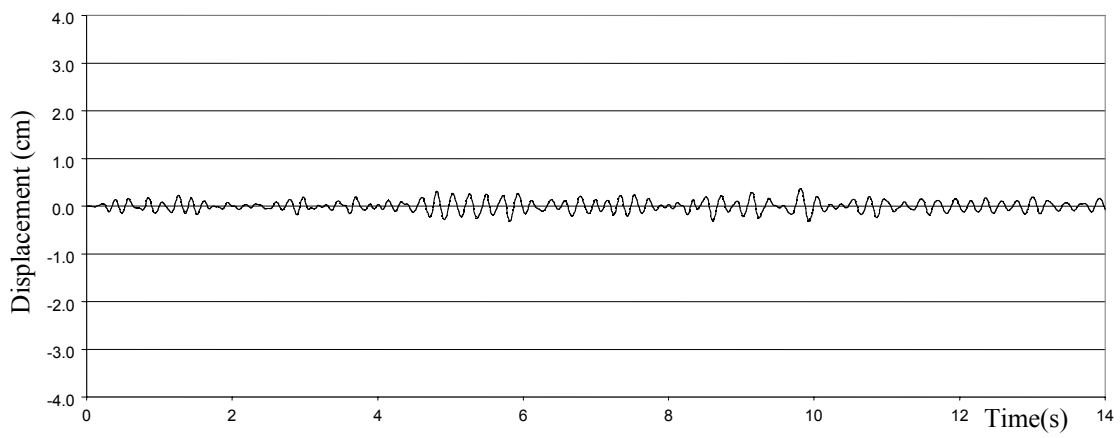

(d)

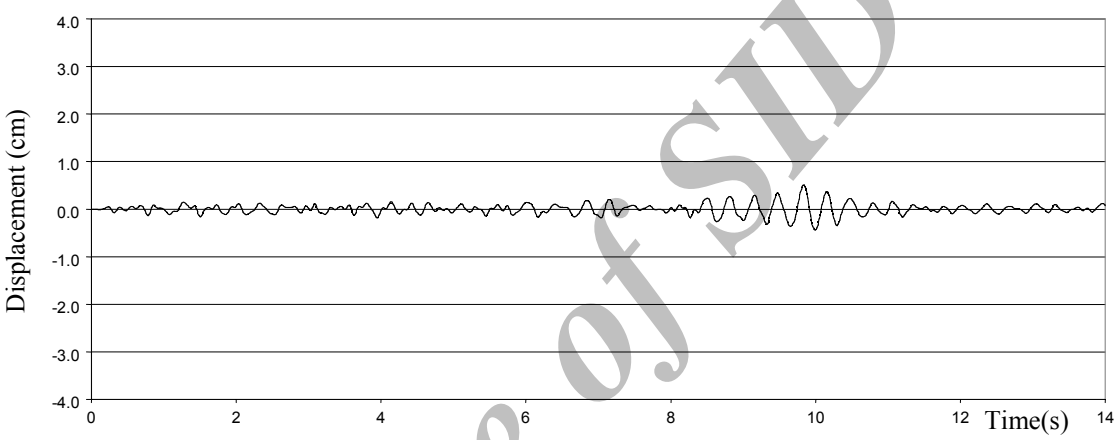

Archive of SID

Elcentro 1940 () Pine Flat () :
() () () () $\beta = 9$

Elcentro 1940

H
H

Pine Flat

PineFlat

- 1 - Westergaard, H. M. (1933). "Water pressure on dams during earthquakes." *ASCE*.
- 2 - Zangar, C. N. and Haefei, R. J. (1952). *Electric analog indicates effects of horizontal earthquake shock on dams* .Civil Eng., PP.54-55.
- 3 - Zienkiewicz, O. C. and Nath, B. (1963). "Earthquake hydrodynamic pressure on arch dams an electric analog solution." *Proc. Inst. Civil. Eng.*, Vol. 25,PP.165-176.
- 4 - Kotsubo, S. (1961). "External forces on arch dams during earthquakes." *Memories Faculty of Engineering*, Kyushu University, Fukuoka, Japan, Vol. 20, No. 4.
- 5 - Bustamante, J. I., Rosenblueth, E., Herrera, I., and Flores, A. (1963). "Presion hidrodinamica en presas y depositos" *Boletin Sociedad Mexicana de Ingenieria Sismica*, Vol. 1, No. 2.
- 6 - Chopra, A. K. (1967). "Hydrodynamic pressure on dams during earthquakes." *Proc., ASCE* , EM6.
- 7 - Chopra, A. K. (1968). "Earthquake behavior of dam-reservoir system." *J. Eng. Mech., ASCE 94*, PP.1475-1499.
- 8 - Saint John, C. M. (1972). "Finite element analysis of two and three-dimension jointed structures-computer programs." *Rock Mechanics Research Report No.13*, Imperial College, London, United Kingdom.

-
- 9 - Chopra, A. K., Chakrabarti, P. (1981). "Earthquake analysis of concrete gravity dams including dam-fluid-foundation rock interaction." *Earthquake Engineering and Structural Dynamics*, Vol. 9, PP.363-383.
- 10- Hall, J. F. and Chopra, A. K. (1982). "Two dimensional dynamic analysis of concrete gravity and embankment dams including hydrodynamic effects." *Earthquake Engineering and Structural Dynamics*, Vol. 10, PP.305-332.
- 11 - Feneves, G., Chopra, A. K. (1985). "Effects of reservoir bottom absorption and dam-water-foundation rock interaction on frequency response functions for concrete gravity dams." *Earthquake Engineering and Structural Dynamics*, Vol. 13, PP.13-31.
- 12 - Lotfi, et al. (1987). "A technique for the analysis of the response of dams to earthquakes." *Earthquake Engineering and Structural Dynamics*, Vol. 15, PP.463-490.
- 13 - Bouaanani, et al. (2003). "A closed-form formulation for earthquake-induced hydrodynamic pressure on gravity dams." *J. Sound and Vibration*, Vol. 261, PP.573-582.
- 14 - Feneves, G. and Chopra, A. K. (1984). "Earthquake analysis of concrete gravity dams including bottom absorption dam-water-foundation rock interaction." *Earthquake Engineering and Structural Dynamics*, Vol. 12, PP.663-683.
- 15 - Lotfi, V. and Tassoulas, J. L. (1986). *Analysis of the response of dams to earthquakes*. Report GR86-2, The University of Texas, Austin.
- 16- Medina, et al., (1990). "On the response of dams to earthquakes including the effects of sediments." *J. Struct. Eng.*, Vol. 116, PP.3108-3121.
- 17- Kucukarslan, S. (2003). "Dam-Reservoir interaction including the reservoir bottom effects in time domain." *Proc., 16th ASCE Eng. Mech. Conference*, University of Washington, Seattle.
- 18- Wilson, E. L. and Khalvati, M. (1983). "Finite elements for dynamic analysis of fluid-solid systems." *Int. J. Num. Meth. Eng.*, Vol. 19.
- 19 - Navayineya, B. and Ahmadei, M. T. "Hydrodynamic analysis of dam and reservoir using Lagrangian method." *I. J. of Eng. Science and Industrial University*, Vol. 6, No.1
- 20 - Alijamshidi, D. (2004). *Assessment of Lagrangian and Eulerian methods for determination of hydrodynamics pressures on concrete gravity dams under seismic effect*. M.Sc. thesis, Civil Engineering Dept., Mazandaran University (in Persian).
- 21- Beer, G. (1985). "An isoparametric joint/interface element for finite elements analysis." *Int. J. Num. Eng.*, Vol. 21.
- 22 - Vaseghi, Amiri, J. (1997). *Nonlinear dynamic analysis of tensile-shear failure in gravity dams including hydrodynamic interaction due to seismic loads*. PhD thesis, Tarbiyate Modares University (in Persian).
- 23 - Bathe, K. J. (1996). *Finite Element Procedures in Eng. Analysis*. Prentice Hall.
- 24 - Chopra, A. K., Chakrabarti, P. and Gupta, S. (1980). *Earthquake Response of Concrete Gravity Dams including Hydrodynamic and Foundation rock interaction Effects*. Report No. UCB/EERC-80/01 January 1980.
-