```
SWAT
\mathbb{R}^2 = ./
        SWAT
                                                                                          ,(
                              .SWAT
                                                                                 / / :
```

E-mail: saadati55@yahoo.com

.() $R^2 = I$.() SWAT 1 .() .() / SWAT (Good Win Creek) .() .() SWAT .() SWAT $R^2 = I$ SWAT Land-use

Soil and Water Assesment Tools

www.SID.ir

	()		
1		_	
1			
1			
1			

SWAT) : Arc-GIS ILWIS :SW (mm) :SWt :t (mm) :R SWAT .() ,SWATSWAT PBIAS² ,NS) TSSR³ SCS Nash Sutclife Parameter Bias

Total Square Sumation Residual

,()) TSAR	(
PBIAS=	$R^{2}=I$ $R^{2}=I$	SWAT NS= / . PBIAS= /	()	.() SWAT
		SWAT .	SWAT File.CIO ⁴	.()
		mgt :()	SWAT . Kas.n	ngt ⁵ File.cio mgt SWAT .()
			. cio	
		SWAT		
. :				
			Control Index	

Management

kg/ha

mgt :($Husc^1$)

mgt :(Husc¹)

SWAT : $Husc = \frac{T_{\text{max}} + T_{\text{min}}}{2} - T_{cree}$

mgt $(T_{
m max})$

IGRO=

mgt

mgt .

mgt

. file.cio

mgt

Heat unit Schedule

<u>....</u>


.

(mm)	(mm)	TSSR	NS	% R ²	(mm)	(mm)	
			I		C.I.)	case0
			1		03	I	case1
	1		1		1	1	case2
	1				1	1	case3
	1	10			1	1	case4
		C	1		1	1	case5
		•	1		1	1	case6

()

Sumer Wheat Barley	Pottato Winter Pea	Rice	Stripper Cotton Picker Cotton	Barley oats	Winter Sumer Wheat Wheat	Grain Sorghum Sorghum hay	Corn Sunflower	Soybeans	
					_				(kg/ha)
1	1	1	5	1	1	1	1	1	(kg/ha
1	1	1	1	2	1	1	1	1	(kg/ha
1	1	1			1			1	^{mm} ET
1	1	1	1	1		1	1	1	^{mm} Qsur
1	1	1	1	1		1	1	1	mm Qlat
1	1	1	1	1			1		GRWshallow mm
1	1	1	1	1	1		1	1	Water Yield
1	1	1	1	1	1		1	1	\mathbb{R}^2
								Mean.Observ	
1	1	1	I	1	1	1	1	1	Mean.Predict ed

							(mm)
case6	Case5	Case4	Case3	Case2	Case1	Case0	
			1			•	
1	1	1	1	1	1	1	
			1				
1	1	1	1	1	1	1	
			1			57	
1	1	1	1	1	V	1	
			1	_			
1	1	1	1	1		1	

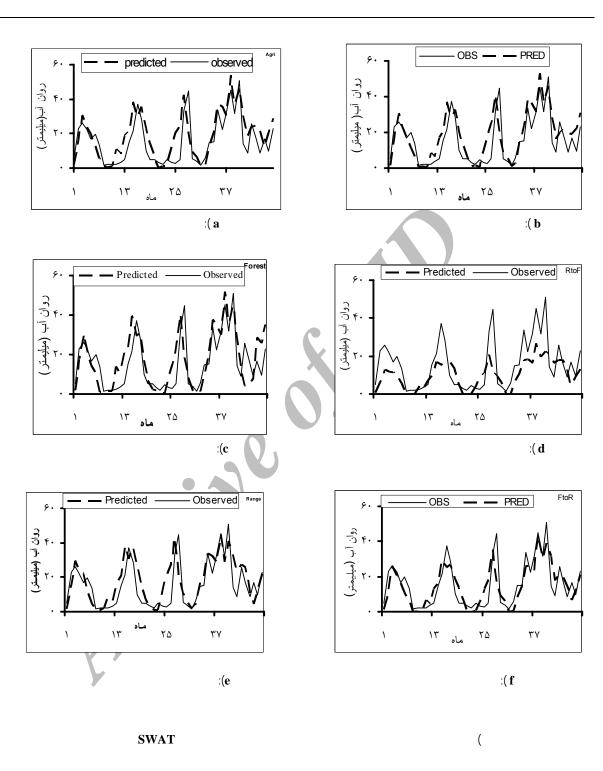

SWAT

SWAT Case0

SWAT
()

SWAT

SWAT .

www.SID.ir

		SWAT
·	()	IIT
	$R^2 = \%$. (Gholami., 1998)
	C	. (
	,	
	SWAT	
		 CW/A T
		SWAT
	SWAT	Γ

··

- 5- Arnold. J, G. 1996, Estimating Hydrologic Budgets for Three Illinois Watersheds. Journal of Hydrology 176:57-77.
- 6- Arnold, J. G., Williams, J, R., Srinivasan, K.W (1996), "SWAT Simulation Model- Soil and Water Assessment Tool", USDA, Agriculture Research Service, 213 pp.
- 7- Bathurst, J.C., 19 . Sensitivity analysis of the Systeme Hydrologice Europeen for an upland catchment. J.Hydrol., 87: 103-123.
- 8- Bingner, R,L., 1996, "Runoff Simulation from Goodwin Creek Watershed Using SWAT, ASAE 59(1): 85-90
- 9- Gholami, S. A., 1998, "Distributed Watershed Modelling of Mountainous Catchment." Synopsis of ph. D Thesis. Dept of Civil Engineering, Indian Institute Technology New Delhe, 469 pp.
- 10- Helvey, J.D., 1971. A summary of rainfall interception by certain conifers of North America. In Biological effects of the hydrological cycle, E.J. Monke, Ed. West Lafayette: Purdue University, 584 pp.
- 11- Leonard, P.B.A. 1979 A stable and accurate convective modelling procedure based on quadratic upstream interpolation. Computer Methods in Applied Mechanics and Engineering , 59-98.
- 12- Nash, J,E and T,E sutclif, 1970, "River Flow Forecasting Through Conceptual Model", Part I,A Discassion of Principles,J, Hydrol . 10(3): 282-290
- 13- Royappan, M., 1984, "Survey of effect of change of land use to runoff by SWAT model in South Africa "Kentucky university, 482 pp.
- 14- Shanholtz, V.O.,1994. A soil water balance model for no-tillage and conventional till systems. Agricultural Water Management, 26:155-168.
- 15- Solan, P.G, et al., 1983. Modeling Surface and Subsruface Stormflow on Steeply. Sloping Forested Watersheds. Water Resources Inst. Report 142, University of Kentucky, Lexington, Kentucky, 345 pp.
- 16- Williams, J.R., 1984. Simulation for water resoruces in rural basins, Journal of Hydrolic Engineering, 111(6):970-986.

An Investigation of The Effects of Land Use Change on Simulating Surface Runoff Using SWAT Mathematical Model (Case Study: Kasilian Catchment Area)

H. Saadati ¹ Sh.A. Gholami ² F. Sharifi ³ S.A. Ayoubzadeh ⁴

Abstract

There are several methods of estimating runoff from a catchmant area. One of these methods is the hydrological model. Hyrological models by simulating hyrological processes, make it possible to evaluate runoff from rainfall in the shortest possible time and with the lowest possible costs. However there does not exist the possibility of measurement of all cases in all cachments, so, there is the necesity of choosing those models which can evaluate hydrological processes with a minimum number of parameters. One of these models is SWAT. This model has been developed by Arnold in 1972 and improved towards perfection by Arnold & Wiliams in 1996. The model receives the daily raifall, daily discharge and daily evapotranspiration, after being optimized parameters. This study was carried out in Kasilian catchment area in Iran. Results indicated the value of determination coefficient to be satisfactory for the cachment. In addition, the results of model revealed that ABF, CN₂ and REVAPC parameters are the most sensitive among other parameters. Finally the effect of hyrological parameters on the streamflow is evaluated. SWAT model simulated the hydrological processes for agricultural and rangeland uses better than for forest land use.

Keywords: SWAT model, Kasilian, Simulation, Hydrological parameters, Runoff, Iran.



²⁻Assistant Prof. Soil Conservation and Watershed Management Research Center

³⁻Associat Prof. Soil Conservation and Watershed Management Research Center

⁴⁻Assistant Prof. Tarbiat Modarres University