

+*

(HPLC-RI)

SPME-GC-FID

KEY WORDS: *Agricultural wastes, Sacarification, Hydrolysis, Bio-ethanol, Cellelose.*

()	()	()	
			(.)

[]

()

()

() []

[]

°C

/

[]
:

[]

()
()

[]

/

[] °C

HPLC

pH

()E

()MTBE

.MTBE

Agilent) (HPLC)

(1100 Series

[]

(mm × / mm.i.d) ZORBAX-NH2 (RI)

Agilent Chem-station


Agilent

(m × / mm.i.d) FID

Split/ Splitless injector Econo-Cap EC-

Atago

/

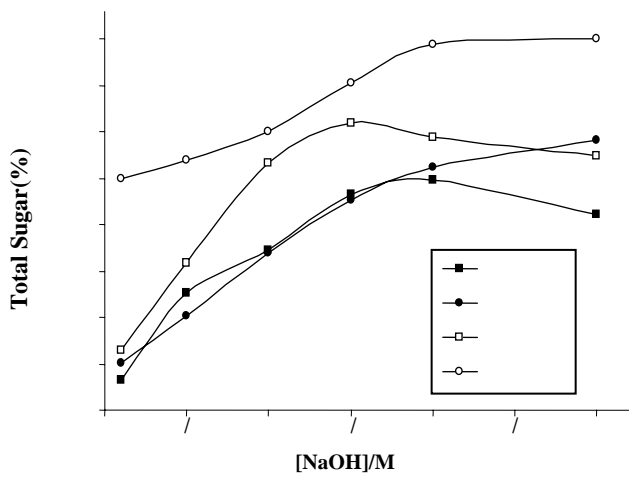

Archive of SID

DAD

B A



/ :A

()

B

pH

()

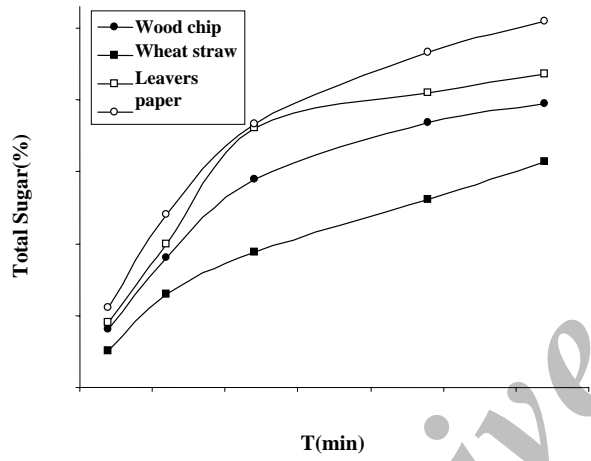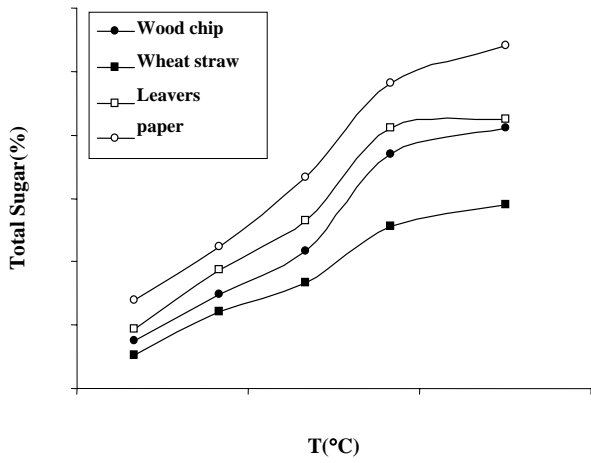

Archive of SID

(H₂SO₄ HCl

[]

	()		
	±	±	±

Archive of SID

pH

pH

pH

- [1] Lynd, L. R., Wyman, C. E., Gerngross, T. U., Continuous Fermentation of Pretreated Hardwood and Avicel by *Clostridium Thermocellum*, *Biocommodity engineering, Biotechnol. Prog.*, **15**, p. 777 (1999)
- [2] Marchessault, R. H., Sundararajan, P. R., in Aspinnall, G. O. (Ed.) The polysaccharides: Cellulose, *Cellulose*, Academic press Inc. New York N. Y., **2**, p.p. 11-95 (1993).
- [3] Lynd, L. R., Weimer, P. J., Zyl, W. H., Pretorius, I. S., Microbial Cellulose Utilization: Fundamentals and Biotechnology, *Microbiology and Molecular Biology Reviews*, **66**, p. 506 (2002)
- [4] Atalla, R. H., Hackney, J. M., Uhlin, I., Thompson, N. S., Hemicelluloses as Structure Regulators in the Aggregation of Native Cellulose, *Int. J. Biol. Macromol.* **15**, p.109 (1993).
- [5] Brown, R. M., Saxena, I. M., Cellulose Biosynthesis: A Model for Understanding the Assembly of Biopolymers, *Plant Physiol. Biochem.* **38**, p. 57 (2000)
- [6] Blouin, F. A., Martin, L. F., Rowland, S. P., Gel Permeation Properties of Cellulose. III. Measurement of Pore Structure of Unmodified and of Mercerized Cottons in Fibrous form, *Textile Res. J.* **40**, p. 809 (1970).
- [7] Cowling, E. B., Physical and Chemical Constraints in the Hydrolysis of Cellulose and Lignocellulosic Materials, *Biotech. Bioeng. Symp.*, **5**, 163, (1975).
- [8] Fan, L. T., Lee, Y. H., Beardmore, D.H., Mechanism of the Enzymatic Hydrolysis of Cellulose: Effects of Major Structural Features of Cellulose on Enzymatic Hydrolysis, *Biotechnol. Bioeng.*, **22**, p.177 (1980).

- [9] Marchessault, R. H., Howsmon, Experimental Evaluation of the Lateral Order Distribution in Cellulose, J. A., *Text. Res. J.*, **27**, p. 30 (1957).
- [10] Stone, J. E., Scallan, A. M., A Structural Model for the Cell Wall of Water-Swollen Wood Pulp Fibres Based on Their Accessibility to Macromolecules, *Cellulose chem. Technol.*, **3**, p. 343 (1968).
- [11] Stone, J. E., Scallan, A. M., Doneffer, E., Ahlgren, E., Digestibility as a Simple Function of a Molecule of Similar Size to Cellulase Enzyme, *Adv. Chem. Ser.*, **95**, p. 219 (1969).
- [12] Demirbas, A., Bioenergy: global warming and environmental impacts, *Energy Sources*, **26**, p. 225 (2004).
- [13] Kapdi. S.S., Vijay V.K., Rajesh S.K., Prasad R., Biogas scrubbing, compression and storage: perspective and prospectus in Indian context, *Renew Energy*, **30**, p. 1195 (2005).
- [14] Demirbas A., Current advances in alternative motor fuels, *Energy Explor Exploit*, **21**, p. 475 (2003).
- [15] Balat M., Current alternative engine fuels, *Energy Sources*, **27**, p. 569 (2005).
- [16] K. Karimi, G. Emtiazi, M. J. Taherzadeh, Ethanol Production from Dilute-Acid Pretreated Rice Straw by Simultaneous Saccharification and Fermentation with *Mucor Indicus*, *Rhizopus Oryzae*, and *Saccharomyces Cerevisiae*, *Enzyme and Microbial Technology*, **40**, p. 138 (2006).
- [17] Y. Shen , Y. Zhang, T. Ma, X. Bao, F. Du, G. Zhuang, Y. Qu, Simultaneous Saccharification and Fermentaiton of Acid-Pretreated Corncoobs with a recombinant *Saccharomyces Cerevisiae* Expresssing β -Glucosidase, *Bioresource Technology*, **99**, p. 5099 (2008).
- [18] J. Iranmahboob, F. Nadim, S. Monemi, Optimizing Acid-Hydrolysis: A Critical Step for Production of Ethanol from Mixed Wood Chips, *Biomass and Bioenergy*, **22**, p. 401 (2002).
- [19] Z. Yu, H. Zhang, Pretreatments of Cellulose Pyrolysate for Ethanol Production by *Saccharomyces Cerevisiae*, *Pichia sp. YZ-1* and *Zymomonas Mobilis*, *Biomass and Bioenergy*, **24**, p. 257 (2003).
- [20] J. Soderstrom, L. Pilcher, M. Galbe, G. Zacchai, Two-Step Steam Pretreatment of Softwood by Dilute H_2SO_4 Impregnation for Ethanol Production, *Biomass and Bioenergy*, **24**, p. 475 (2003).
- [21] Lambert R. O., Millicent JR., Moore-bulls R., Barrier, J. W., an Evaluation of Two Acid Hydrolysis Processes for the Conversion of Cellulosic Feedstocks to Ethanol and Other Chemicals, *Applied Biochernistry and Biotechnology*, **24-25**, p. 773 (1990).
- [22] Sun, Y., Cheng, J., Hydrolysis of Lignocellulosic Materials for Ethanol Production: A Review, *Bioresource Technol.*, **83**, p. 1 (2002).
- [23] McMillan, J.D., Pretreatment of lignocellulosic biomass. In: Himmel, M.E., Baker, J.O., Overend, R.P. (Eds.), "Enzymatic Conversion of Biomass for Fuels Production", American Chemical Society, Washington, DC, pp. 292-324 (1994).

- [24] Kadar, Zs., Szengyel, Zs., Reczey, K., Simultaneous saccharification and Fermentation (SSF) of Industrial Wastes for the Production of Ethanol, *Industrial Crops and Products*; **20**, p. 103 (2004).
- [25] Duff, S.J.B., Murray, W.D., Bioconversion of Forest Products Industry Waste Cellulosics to Fuel Ethanol: A Review, *Bioresour. Technol.* **55**, p. 1 (1996).

Archive of SID