



مرکز دریایی و مخابرات دریایی

سازمان بنادر و دریانوردی به عنوان تنها مرجع حاکمیتی کشور در امور بندری، دریایی و کشتیرانی بازرگانی به منظور ایفای نقش مرجعیت دانشی خود و در راستای تحقق راهبردهای کلان نقشه جامع علمی کشور مبنی بر "حمایت از توسعه شبکه‌های تحقیقاتی و تسهیل انتقال و انتشار دانش و سامان‌دهی علمی" از طریق "استانداردسازی و اصلاح فرایندهای تولید، ثبت، داوری و سنجش و ایجاد بانک‌های اطلاعاتی یکپارچه برای نشریات، اختراعات و اکتشافات پژوهشگران"، اقدام به ارایه این اثر در سایت SID می‌نماید.



سازمان بنادر و دریانوردی





## SIMULATION OF SPILLING BREAKING WAVES

Mohammad Amin Ghahremani<sup>1</sup>, Masoud, Montazeri Namin<sup>2</sup>

**Key Words:** Spilling, Wave breaking, Two-phase Flow, VOF, FLUENT

### Introduction

Along with physical experiments, numerical simulations are useful tools for designing coastal structures as well as for understanding natural hydrodynamic processes in the field of coastal engineering. Among the numerical models, the VOF-type model (Volume Of Fluid) has been attracted as a potential tool to construct practical numerical wave channels in the past decade. The VOF model can simulate flows including the shape and evolution of the free surface, thus the complex free surface boundary can be efficiently simulated.

In this paper, a commercially available Computational Fluid Dynamics software called FLUENT has been deployed for 2D spilling breaking wave simulations. This software is designed to solve transient, free surface flow problems based on the solution of the Navier-Stokes equations in two or three-dimensions. We will compare the results with experimental data [1] and numerical models [2], [3].

### Model Description

The condition similar to the laboratory experiment by [1] is used for testing the numerical simulation of breaking waves on a sloping bottom. In the laboratory experiment, a beach with uniform slope of 1/35 is connected to a region with constant depth  $d_c = 0.40$  m. Figure 1) shows the schematic view of the numerical wave tank. The wave parameters are shown in Table 1).

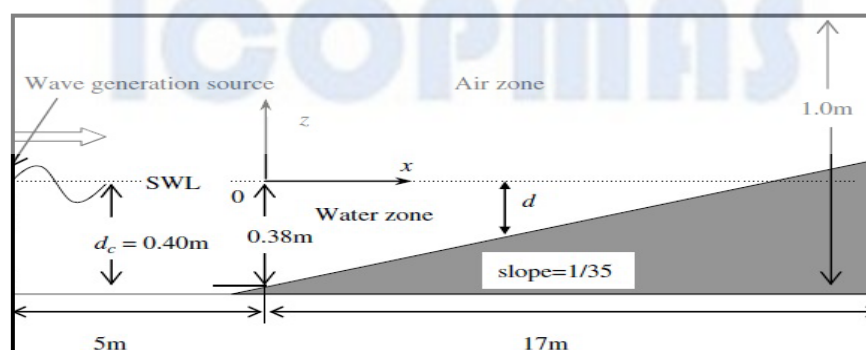


Fig. 1) Sketch of Simulation domain

Table 1) Incident Wave Characteristics

Breaker type	$H_0$ (m)	$T$ (s)	$H_0/L_0$	$x_b$ (m)	$d_b$ (m)
Spilling	0.127	2	0.020	6.4	0.195

<sup>1</sup>MSc in Marine Structures, University of Tehran, amin62gh@yahoo.com

<sup>2</sup>Assistant Professor, University of Tehran, mnamin@ut.ac.ir

## Governing Equations

The governing equations for simulation of the unsteady turbulent flows (NS equations) in the near-shore zone are described with a two-dimensional k-ε turbulence model as follows. They are based on conservation of mass (1) and momentum (2)-(3).

$$\frac{\partial u}{\partial x} + \frac{\partial w}{\partial z} = 0 \quad (1)$$

$$\frac{\partial u}{\partial t} + u \frac{\partial u}{\partial x} + w \frac{\partial u}{\partial z} = \left( \nu \frac{\partial^2 u}{\partial x^2} \right) + \left( \nu \frac{\partial^2 u}{\partial z^2} \right) - \frac{1}{\rho} \frac{\partial P}{\partial x} + \frac{\partial}{\partial x} \left( 2\nu_t \frac{\partial u}{\partial x} \right) + \frac{\partial}{\partial z} \left[ \nu_t \left( \frac{\partial u}{\partial z} + \frac{\partial w}{\partial x} \right) \right] \quad (2)$$

$$\frac{\partial w}{\partial t} + u \frac{\partial w}{\partial x} + w \frac{\partial w}{\partial z} = \left( \nu \frac{\partial^2 w}{\partial x^2} \right) + \left( \nu \frac{\partial^2 w}{\partial z^2} \right) - \frac{1}{\rho} \frac{\partial P}{\partial z} + \frac{\partial}{\partial z} \left( 2\nu_t \frac{\partial w}{\partial z} \right) + \frac{\partial}{\partial x} \left[ \nu_t \left( \frac{\partial u}{\partial z} + \frac{\partial w}{\partial x} \right) \right] - g \quad (3)$$

The VOF model is a surface-tracking technique designed for two or more immiscible fluids where the position of the interface between the fluids is of interest. In any given cell, the function  $F(x, z)$  is the proportion of the cell that is filled. The derivatives of  $F$  can be used for the definition of the fluid location in any cell. The governing equations for  $F$  are

$$\frac{\partial F}{\partial t} + u \frac{\partial F}{\partial x} + w \frac{\partial F}{\partial z} = 0 \quad (4)$$

$$0 \leq F \leq 1 \quad (5)$$

## Model Performance

The water surface profile for time=15.28s can be observed in Fig.2). Figs.3) presents turbulent viscosity while a particular wave starts to break.

Fig. 2) Water Surface Profile (t=10.28s)

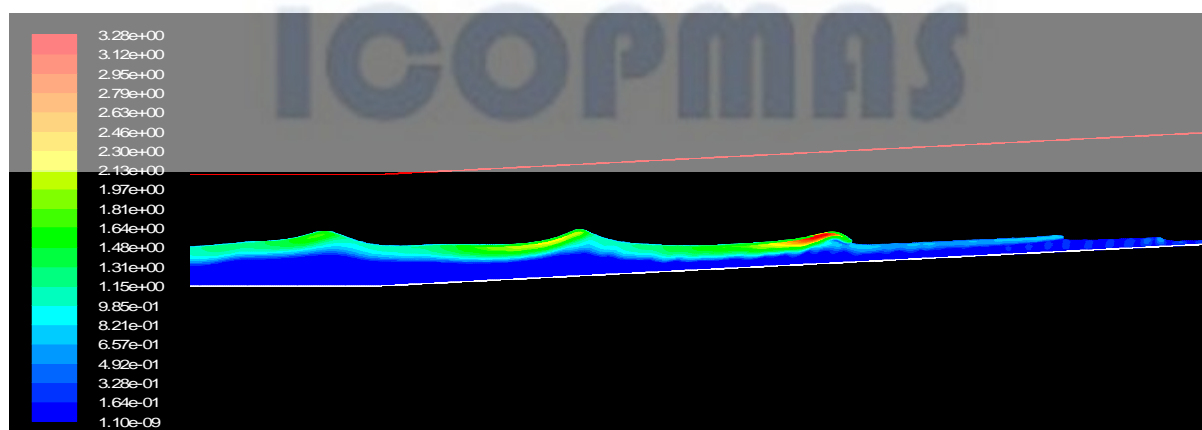


Fig. 2) Contours of Turbulent Viscosity (kg/m-s)-(time=10.504s)

In Fig.4) , the variation of water surface elevation during a period for  $x=4m$  has been illustrated. The model results show a difference about 25% in  $H_b$  and 22% in  $x_b$  which are breaking height and location of wave while breaking respectively.

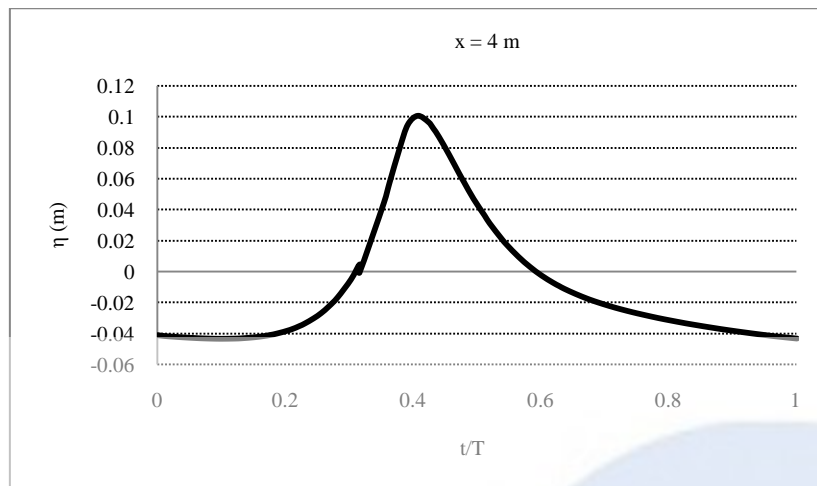


Fig. 3) The variation of water elevation in a period ( $x=4m$ )

### References

- [1]-Ting, F.C.K., Kirby, J.T. (1996). Dynamics of surf-zone in a spilling breaker. Coastal Engineering Journal 27, 131–160.
- [2]-Bradford, S. (2000). Numerical simulation of surf zone dynamics. Waterway Port Coast Ocean Engineering Journal, 126:1-13.
- [3]-Zhao Q, A. S. (2004). Numerical simulation of breaking waves by a multi-scale turbulence model. Coastal Engineering Journal, 51(1):53–80.

ICOPMAS