



مرکز دریایی و مخابرات دریایی

سازمان بنادر و دریانوردی به عنوان تنها مرجع حاکمیتی کشور در امور بندری، دریایی و کشتیرانی بازرگانی به منظور ایفای نقش مرجعیت دانشی خود و در راستای تحقق راهبردهای کلان نقشه جامع علمی کشور مبنی بر "حمایت از توسعه شبکه‌های تحقیقاتی و تسهیل انتقال و انتشار دانش و سامان‌دهی علمی" از طریق "استانداردسازی و اصلاح فرایندهای تولید، ثبت، داوری و سنجش و ایجاد بانک‌های اطلاعاتی یکپارچه برای نشریات، اختراعات و اکتشافات پژوهشگران"، اقدام به ارایه این اثر در سایت SID می‌نماید.



سازمان بنادر و دریانوردی



Comparison Behavior of Pile-Supported Wharves under Monotonic and Cyclic Lateral Load

Dr. Khosrow Bargi, Member of Civil Engineering Faculty, University of Tehran
Rohollah Amirabadi, PhD student in Marine Structures, Civil Engineering Faculty,
University of Tehran

Abstract

Pile supported wharf structures are include a concrete slab which supported on substructure from some elements including pile and embankment, soil maintenance structure and other elements. For comparison performance of pile and deck under monotonic and cyclic lateral loading; pile and deck structure with determined geotechnical and structural specifications being under increase lateral monotonic and cyclic load. In modeling of structures, soil-structure interaction was modeled with P-Y curve (Matlock. 1970) and these structures were taken under different surcharge.

Structures under cyclic load due to small lateral displacement receive to critical state in comparison with structure under monotonic loading. In addition, those structures with larger surcharge may tolerate greater lateral deforming under same force.

Key words: monotonic loading, cyclic loading, pile supported wharf, P-Y curve.

Introduction

From an engineering point of view, port structures are soil-structure systems that consist of various combinations of structural and foundation types. Some port structures are mixed and can not be fully characterized by a single structural or foundation type, or stability mechanism. It is also difficult to produce an alternative characterization based on the vulnerability of the structure to damage by strong ground motions. This is due to the relative importance of the soil-fill conditions on the seismic performance of the structure.

A pile-supported wharf is composed of deck supported by a sub structure consisting of piles and dike/slope. The unsupported pile length above the dike/slope surface is variable. When rockfill suitable for construction of the dike is uneconomical, a gravity or sheet pile retaining structure is also constructed to replace a portion of the dike. The seismic response of pile-supported wharves is influenced to a great degree by complex soil-structure interaction during ground shaking. Typical failure modes during earthquakes depend on the magnitude of the inertia force relative to the ground displacement. So studying behavior of pile-supported structures under monotonic and cyclic lateral load could aid to know behavior of these structures under earthquake load correctly.

For comparison performance of pile and deck under monotonic and cyclic lateral loading; pile and deck structure with determined geotechnical and structural specifications being under increase lateral monotonic and cyclic load. In modeling of structures, soil-structure interaction was modeled with P-Y curve (Matlock. 1970) and these structures were taken under different surcharge.

Characteristics of proposed pile –supported wharf

A pile-supported wharf with a water depth of 12 m was proposed for construction. The proposed cross section and plan of the pile-supported wharf shown in Fig.1. Geotechnical parameters, including the coefficient of subgrade reaction, were determined from a geotechnical investigation and are given in Table.1. The wharf supported by four rows of 1.2 m diameter steel pipe piles. Piles in rows 1 through 3 have a wall thickness of 12 mm,

and the piles in row 4 have a wall thickness of 14 mm. Structural parameters for these piles are given in Table.2. Loads considered in the design include a 30 kN/m^2 dead weight of the deck, and crane loads of 2400 kN per unit frame work of the pile-deck system. Structure was loaded on two different surcharges. Surcharge no. 1 was 10 kN/m^2 and other surcharge i.e. surcharge no. 2 was 30 kN/m^2 .

Fig.1. proposed pile-supported wharf

a) Cross section.

b) Plan.

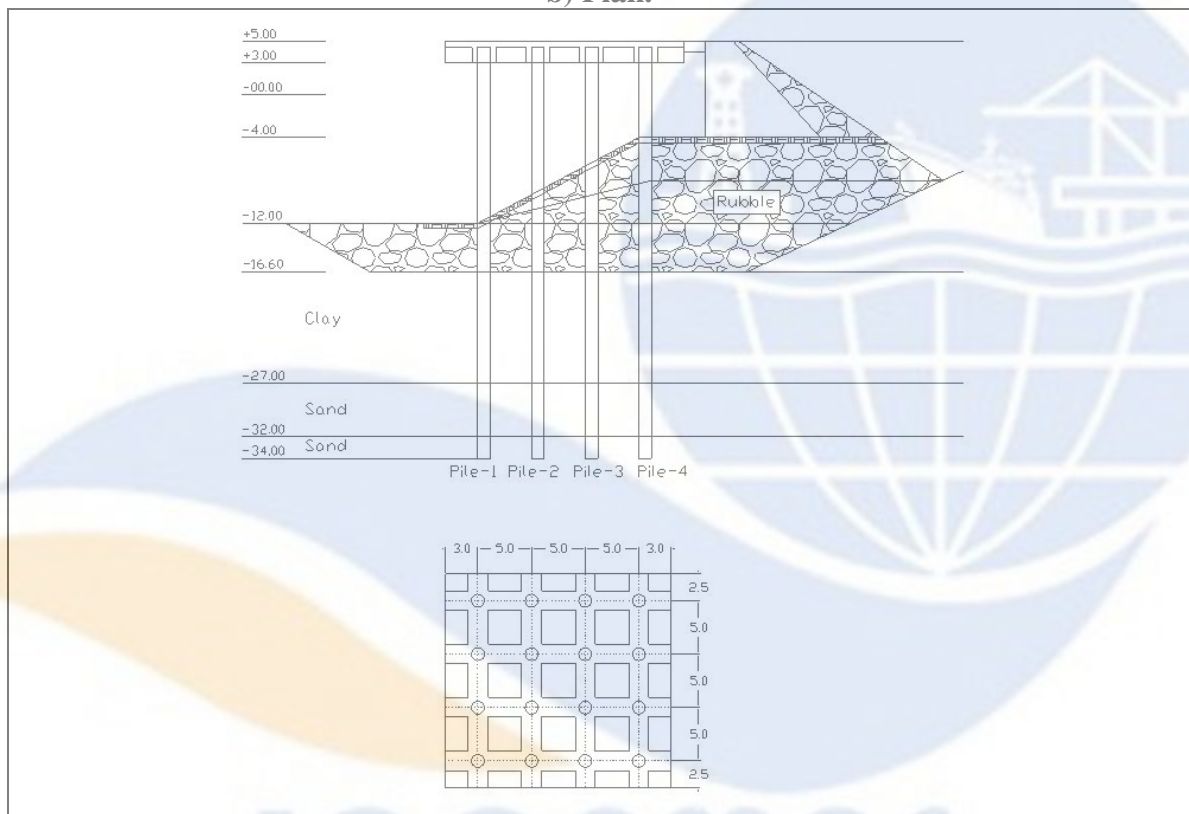


Table.1. Major geotechnical parameters for pile-supported wharf.

Soil layers	Density (t/m^3)	Coefficient of subgrade reaction (kN/m^3)	Internal friction angle or unconfined compressive strength (kN/m^3)
Rubble	1.9	29000	$\Phi=30^\circ$
Soil layer 1 (Clay)	1.6	29000	$q_u=60$
Soil layer 2 (Sand)	2.0	117000	$\Phi=35^\circ$
Soil layer 3 (Sand)	2.0	290000	$\Phi=35^\circ$

Table.2. Major pile parameters.

Type of parameter	Pile parameters	
	Piles 1 through 3	Pile 4
Diameter (m)	1.2	1.2

Thickness (m)*	0.011	0.013
Cross section area (m ²)	0.0410	0.0484
Moment of inertia (m ⁴)	0.00723	0.00850
Elastic section modulus (m ³)	0.0120	0.0142
Yield stress (kN/m ²)**	315000	315000
Yong modulus (kN/m ²)	2.06*10 ⁸	2.06*10 ⁸
* Cross section area and moment of inertia are computed by allowing loss of cross section in 1 mm thickness due to correction		
** Steel used was SKK490 in JIS-A-5525		

The unit framework considered for design is indicated by hatching in Fig.2. Soil-structure interaction was modeled by P-Y curve (Matlock. 1970). Lateral load was applied two types: monotonic and cyclic load.

Models were labeled with both alphabet and number that shown type of applied surcharge and type of applied lateral load:

Marker number of applied surcharge,

1=Surcharge equals 10 kN/m².

2=Surcharge equals 30 kN/m².

Marker word of type of lateral load,

SC=Cyclic lateral load.

SM=Monotonic lateral load.

Model of studying pile-supported wharf

The computer program ANSYS6.1 was used for the analysis. This program has different ability such as static analysis, time history analysis, modal analysis, spectrum analysis and other analysis. In addition, this program could model nonlinear behavior of material, creep, contact mechanism and other ability.

In this modeling, piles element was modeled with SHELL 181 element and for springs modeling that were derived base on P-Y curve were used CONBINE 39 element. Because the deck of structure was rigid, all nodes of piles those were located in top of piles constraint to one point. The inplan rotation of this point was limited. In all model, more over the springs were located in respective nodes, vertical movement of all nodes of piles that were located in bottom of piles were limited. In fact bottom of piles behavior such as roller supports.

Steel stress-strain curve assume with hardness equal 2% elastic module. Lateral load was applied in two types: monotonic and cyclic load. In cyclic lateral load, load was increase 20 mm in any time step. In this case, total displacement was 320 mm. In other type of lateral load i.e. monotonic lateral load, load was increase 4 mm in any time step. Total lateral displacement was 500 mm. Lateral displacements in any type of lateral loads were applied to top of deck. In any time step, with applied lateral displacement could earn applied lateral load in supports and created strain and stress in piles elements.

Results of modeling and analysis

In this chapter, results of four models that were analyzed with computer program ANSYS6.1 were presented. Results of models compared together until effect of different factors in modeling such as difference in surcharge or difference in typical lateral loading determined.

Maximum lateral displacement, maximum element strain, length of plastic hinge, total lateral load and hysteresis energy given in Table.3, Table.4, Table.5 and Table.6. Force-displacement curve shown in Fig.2, Fig.3, Fig.4 and Fig.5.

Table.3. Analysis results of 1SM model

D = 29.6 cm			D = 26 cm			D = 19.2 cm			D = 18 cm			D = 16 cm			Displacement	
LPH	Status	Max strain	LPH	Status	Max strain	LPH	Status	Max strain	LPH	Status	Max strain	LPH ¹	Status	Max strain	Title	
15	P	.00315		P	.00253		P	.00173		P	.00163				Top	Pile 1
	P ²	.00163													Bottom	
5	P	.00306		P	.00243		P	.00163							Top	Pile 2
															Bottom	
30	P	.00325		P	.00263		P	.00173		P	.00163				Top	Pile 3
															Bottom	
80	P	.00383	21	P	.00318		P	.00193		P	.00183		P	.00163	Top	Pile 4
															Bottom	
1360			1245			959			914			828			Total Force (KN)	
						D = 34.4 cm			D = 33.6 cm			D = 32.8 cm			Displacement	
						LPH	Status	Max strain	LPH	Status		LPH	Status	Max strain	Title	
						83	P	.00393	75	P		60	P	.00365	Top	Pile 1
							P	.00240		P			P	.00193	Bottom	
						75	P	.00388	65	P		55	P	.00354	Top	Pile 2
							P ²	.00160							Bottom	
						92	P	.00408	85	P		75	P	.00378	Top	Pile 3
							P	.00181		P ⁴	.00163				Bottom	
						133	P	.00491	125	P	.00473	110	P	.00458	Top	Pile 4
							P	.00190		P	.00181		P ³	.00163	Bottom	
1. Length of Plastic Hinge (cm)						1522			1503			1482			Total Force (KN)	
2. Level of the bottom plastic hinge is -14 m																
3. Level of the bottom plastic hinge is -11.5 m																
4. Level of the bottom plastic hinge is -12.5 m																
5. Level of the bottom plastic hinge is -13 m																

Force_Displacement Curve

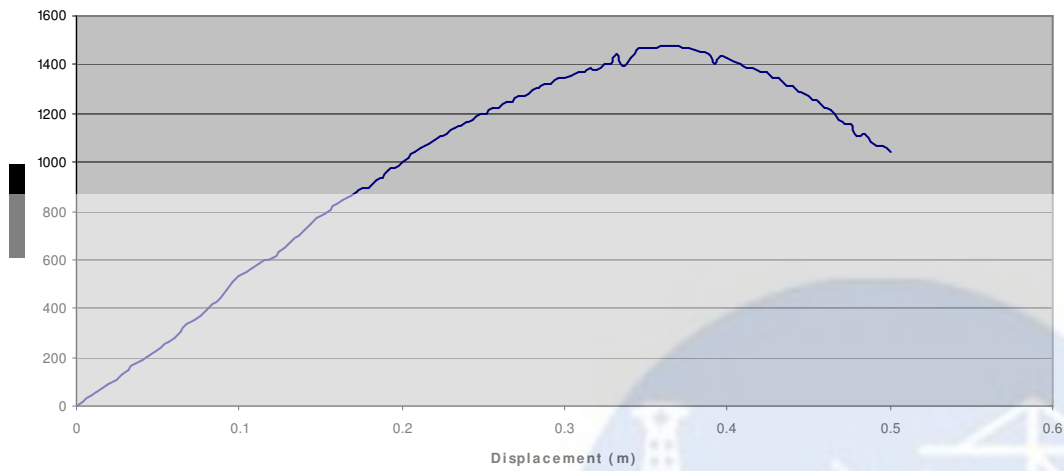


Table.5. Analysis results of 1SC model

D = 32 cm				D = 30 cm				D = 20 cm				D = 18 cm				D = 16 cm				Displacement	
E	LPH	Status	Max strain	E	LPH	Status	Max strain	E	LPH	Status	Max strain	E	LPH	Status	Max strain	E ⁵	LPH ¹	Status	Max strain	Title	
436	190	P	.01358	394	174	P	.00954	200		P	.00181	120		P	.00163	81				Top	Pile 1
		P	.00223			P ²	.00186												Bottom		
	203	P	.01958			194	P		.01383		P		.00171							Top	Pile 2
																			Bottom		
	210	P	.02478			203	P		.01786		P		.00205		P		.00166			Top	Pile 3
		P ³	.00173					50											Bottom		
	221	P	.03716			218	P		.02786	P	.00324		P	.00209		P	.00163		Top	Pile 4	
		P ⁴	.00185															Bottom			
1271				1266				852				796				695				Total Force (kN)	
																D = -32 cm				Displacement	
																E	LPH	Status	Max strain	Title	
																	194	P	.01598	Top	Pile 1
																		P	.00224	Bottom	
																	207	P	.02288	Top	Pile 2
																				Bottom	
																	214	P	.02871	Top	Pile 3
																		P	.00175	Bottom	
																	223	P	.04238	Top	Pile 4
																		P	.00186	Bottom	
																1643				Total Force (kN)	

Fig.4. Force-displacement curve of 1SC model

Hysteresis Chart


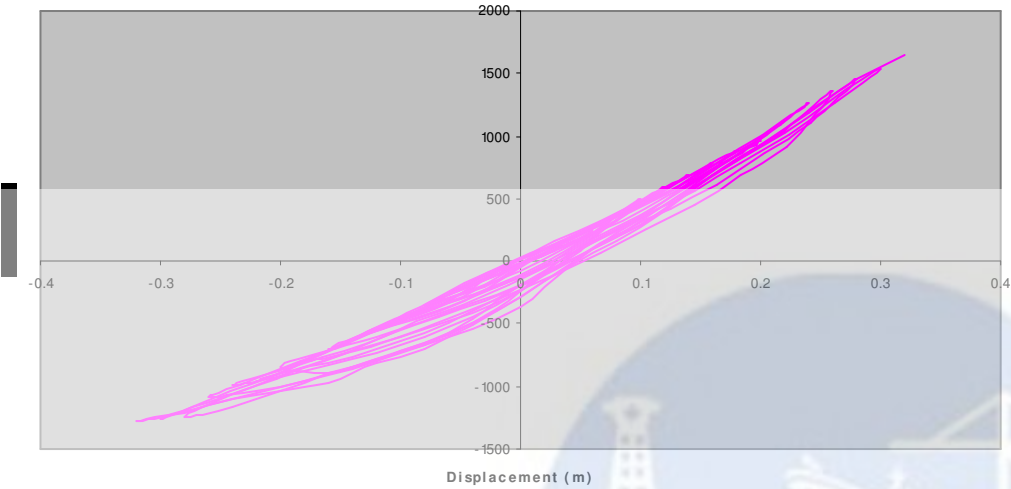


Table.6. Analysis results of 1SC model

D = 30 cm				D = 28 cm				D = 20 cm				D = 18 cm				D = 16 cm				Displacement									
E	LPH	Status	Max strain	E	LPH	Status	Max strain	E	LPH	Status	Max strain	E	LPH	Status	Max strain	E ⁵	LPH ¹	Status	Max strain	Title									
364	178	P	.00978	339	142	P	.00670	199		P	.00189	126		P	.00168	80				Top	Pile 1								
		P	.00245			P ²	.00181													Bottom	Pile 1								
	197	P	.01398		178	P	.00951			P	.00176									Top	Pile 2								
	208	P	.01798		191	P	.01250			P	.00214				P		.00163				Bottom	Pile 3							
		P ⁴	.00169																		Top	Pile 3							
	216	P	.02808	204	P	.02023		70	P	.00330			P	.00216			P	.00168	Top	Pile 4									
		P ³	.00183																	Bottom	Pile 4								
1226				1147				814				770				693				Total Force (KN)									
																D = -32 cm				Displacement									
																E	LPH	Status	Max strain	Title									
<div>1. Length of Plastic Hinge (cm)</div> <div>2. Level of the bottom plastic hinge is -14.5 m</div> <div>3. Level of the bottom plastic hinge is -11.5 m</div> <div>4. Level of the bottom plastic hinge is -12.5 m</div> <div>5. Hystercis Energy (KN.m)</div>																				195	P	.001633		Top	Pile 1				
																							40	P	.00338		Bottom	Pile 1	
																							208	P	.002303		Top	Pile 2	
																											Bottom	Pile 2	
																								215	P	.002908		Top	Pile 3
																									P	.00205		Bottom	Pile 3
																								221	P	.04273		Top	Pile 4
																	P	.00223		Bottom	Pile 4								
																1616				Total Force (KN)									

Fig.5. Force-displacement curve of 2SC model

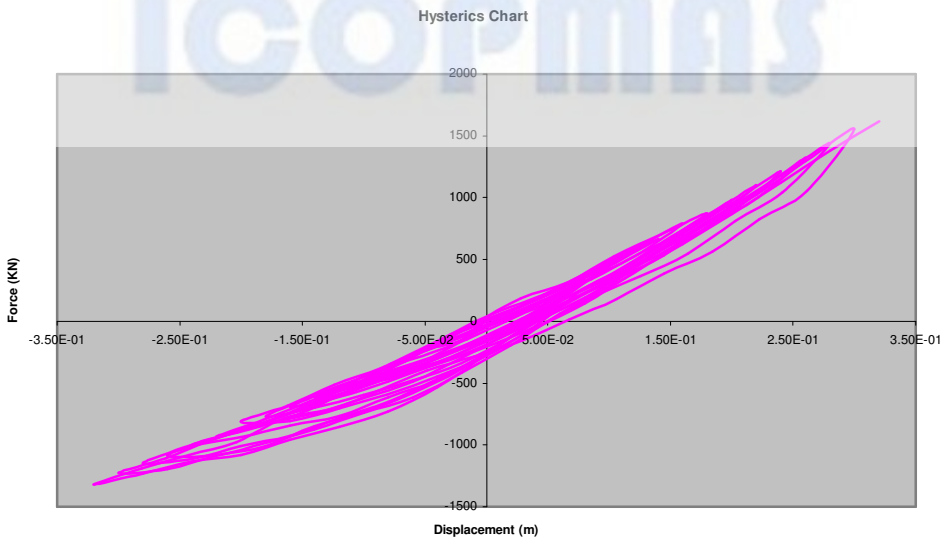

Conclusion

a) Effect of different surcharge

With comparison of structures model that their surcharge is different and same lateral displacement, because of increase of compressive axial load and increase of compressive strain too, the amount of created elements strain and length of plastic hinge in the structures model were loaded with surcharge no.2 was more than structures model were loaded with surcharge no.1.

Other results gain this comparison is that the structures with the same lateral displacement, the structures with greater vertical loads, created total lateral loads in their supports are less than others i.e. the structures with the same lateral load, the structures with greater vertical loads, created deck lateral displacement are more than others.

Hysteresis energy in the structures model was loaded with surcharge no.1 was less than structures model were loaded with surcharge no.2.

b) Effect of typical lateral load

With comparison of structures that their typical lateral load is different and same surcharge load, the amount of created elements strain and length of plastic hinge in the structures were applied cyclic lateral was more than structures were applied monotonic loaded. The reason of this behavior is step by step accumulated damage.

Reference

1. Seismic Design Guideline for Port Structure, Working Group NO.34 of the Maritime Navigation Commission, International Navigation Association, 2000.
2. Bertero, V. V., 1997, Performance-Based Seismic Engineering: A Critical review of proposed guidelines, In: Seismic Design Methodologies for the Next Generation of Codes, Proceeding of the International Workshop on Seismic Design Methodologies for the Next Generation of Codes, Balkema, Rotterdam, P. 1-31.
3. Fajfar, p., EERI, M., 2000, A Nonlinear Analysis Method for Performance-Based Seismic Design, Earthquake Spectra, Vol. 16, NO.3, August 2000, P.573-592
4. SEOAC, 1995, Performance Based Seismic Engineering of Building, Vol.1, April 1995.
5. Kramer, S.L, 1996, Geotechnical Earthquake Engineering, Prentice Hall, 653 p.

ICOPMAS