

Trigonometrically fitted two-step Obrechhoff methods for the numerical solution of periodic initial value problems

ALI SHOKRI¹, ABBAS ALI SHOKRI², SHABNAM MOSTAFAVI¹ AND HOSEIN SAADAT¹

¹ Faculty of Mathematical Science, University of Maragheh, Maragheh, Iran

² Department of Mathematics, Ahar Branch, Islamic Azad University, Ahar, Iran

Correspondence should be addressed to shokri@maragheh.ac.ir

Received 18 May 2014; Accepted 9 November 2014

ACADEMIC EDITOR: HASSAN YOUSEFI-AZARI

ABSTRACT In this paper, we present a new two-step trigonometrically fitted symmetric Obrechhoff method. The method is based on the symmetric two-step Obrechhoff method, with eighth algebraic order, high phase-lag order and is constructed to solve IVPs with periodic solutions such as orbital problems. We compare the new method to some recently constructed optimized methods from the literature. The numerical results obtained by the new method for some problems show its superiority in efficiency, accuracy and stability.

KEYWORDS Obrechhoff methods • Trigonometrically-fitting • Initial value problems • Symmetric multistep methods • oscillating solution

1. INTRODUCTION

In this paper, the symmetric Obrechhoff methods for solving special classes of initial value problems associated with second order ordinary differential equations of the type

$$y'' = f(x, y), \quad y(x_0) = y_0, \quad y'(x_0) = y'_0 \quad (1)$$

in which the first order derivatives do not occur explicitly, are discussed. The numerical integration methods for (1) can be divided into two distinct classes:

1. Problems for which the solution period is known (even approximately) in advance.
2. Problems for which the period is not known.

For several decades, there has been strong interest in searching for better numerical methods to integrate first-order and second-order initial value problems, because these problems are usually encountered in celestial mechanics, quantum mechanical scattering theory, theoretical physics and chemistry, and electronics. Generally, the solution of (1) is periodic, so it is expected that the result produced by some numerical methods preserves the analogical periodicity of the analytic solution [1-22]. Computational methods involving a parameter proposed by Gautschi [8], Alolyan and et al [2], Jain et al. [12] and Steifel and Bettis [24] yield numerical solution of problems of class 1. Chawla and et al [4], Ananthakrishnaiah [3], Shokri and et al. [21, 22, 23], Simos [24], Dahlquist [5], Franco and et al [6, 7], Lambert and Watson [14], Hairer [9], Saldanha and et al [20], Wang and et al. [27, 28, 29] and Daele and Vanden Berghe [25, 26] have developed methods to solve problems of class 2.

Consider Obrechhoff method of the form

$$\sum_{j=0}^k \alpha_j y_{n-j+1} = \sum_{i=1}^l h^{2i} \sum_{j=0}^k \beta_j y^{(2i)}_{n-j+1}, \tag{2}$$

for the numerical integration of the problem (1). The method (2) is symmetric when $\alpha_j = \alpha_{k-j}, \beta_j = \beta_{k-j}, j = 0, 1, 2, \dots, k$, and it is of order q if the truncation error associated with the linear difference operator is given as

$$TE = C_{q+2} h^{q+2} y^{(q+2)}, \quad x_{n-k+1} < \eta < x_{n+1},$$

where C_{q+2} is a constant dependent on h . To investigate the stability properties of the methods for solving the initial value problem (1), Lambert and Watson [14] introduced the scalar test equation $y'' = -\omega^2 y, \omega \in \mathbb{R}$. When the method (2) is applied to the test equation, we get the characteristic equation as

$$\rho(\xi) - \sum_{i=1}^l (-1)^i v^{2i} \sigma_i(\xi) = 0, \tag{3}$$

Where $v = \lambda h$ and

$$\rho(\xi) = \sum_{j=0}^k \alpha_j \xi^{k-j}, \quad \sigma_i(\xi) = \sum_{j=0}^k \beta_j j \xi^{k-j}, \quad i = 1, 2, \dots, l. \tag{4}$$

Definition 1.1. The method (2) is said to have interval of periodicity $(0, v_0^2)$ if for all $v^2 \in (0, v_0^2)$ the roots of Eq. (3) are complex and at least two of them lie on the unit circle and the others lie inside the unit circle.

Definition 1.2. The method (2) is said to be P-stable if its interval of periodicity is $(0, \infty)$.

Definition 1.3. For any symmetric multistep methods, the phase-lag (frequency distortion) of order q is given by

$$t(v) = v - \theta(v) = Cv^{q+1} + O(v^{q+2}), \tag{5}$$

where C is the phase lag constant and q is the phase-lag order.

The characteristic equation of the method (2) is given by

$$\Omega(s : v^2) = A(v)s^2 - 2B(v)s + A(v) = 0, \tag{6}$$

where

$$A(v) = 1 + \sum_{i=1}^m (-1)^i \beta_{i0} v^{2i}, \quad B(v) = 1 + \sum_{i=1}^m (-1)^i \beta_{i1} v^{2i}, \tag{7}$$

ψ contains polynomial functions together with trigonometric polynomials

$$\Psi_{trig} = \{1, t, \dots, t^k, \cos(r\omega t), \sin(r\omega t), r = 1, 2, \dots, p\}. \tag{8}$$

The resulting methods are then based on a hybrid set of polynomials and trigonometric functions. If P is limited to $P = M/2 - 1$, we called method with zero phase-lag. We present here the trigonometric versions of the set. In case ω is purely imaginary one obtains the hyperbolic description of this set. This set is characterized by two integer parameters K and P . The set in which there is no polynomial part is identified by $K = -1$ while the set in which there is no trigonometric polynomial component is identified by $P = -1$. For each problem one has $K + 2P = M - 3$, where $M - 1$ is the maximum exponent present in the full polynomial basis for the same problem (see [22, 23]).

2. CONSTRUCTION OF THE NEW METHOD

From the form (2) and without loss of generality we assume

$$\alpha_j = \alpha_{m-j}, \beta_{i,j} = \beta_{i,m-j}, \quad j = 0(1) \left\lfloor \frac{m}{2} \right\rfloor$$

and we can write

$$y_{n+1} - 2y_n + y_{n-1} = \sum_{i=1}^m h^{2i} [\beta_{i_0} y_{n+1}^{(2i)} + \beta_{i_1} y_n^{(2i)} + \beta_{i_0} y_{n-1}^{(2i)}], \tag{9}$$

when $m = 2$ we get

$$y_{n+1} - 2y_n + y_{n-1} = h^2 [\beta_{10}(y_{n+1}^{(2)} + y_{n-1}^{(2)}) + \beta_{11}y_n^{(2)}] + h^4 [\beta_{20}(y_{n+1}^{(4)} + y_{n-1}^{(4)}) + \beta_{21}y_n^{(4)}]. \quad (10)$$

$M - 3$ for method (10) is 7 so that if $P = -1$, $K = 9$ we obtain classic method and the coefficients of this method are

$$\beta_{1,0} = \frac{11}{252}, \quad \beta_{1,1} = \frac{115}{126}, \quad \beta_{2,0} = -\frac{13}{15120}, \quad \beta_{2,1} = \frac{313}{7560}, \quad (11)$$

and its local truncation error is given by

$$LTE_{clas} = \frac{59}{76204800} y^{(10)} h^{10} + O(h^{12}).$$

If $P = 4$, $K = -1$ we obtain the method with zero phase-lag (PL), and the coefficients of this case are given by

$$\beta_{1,0} = -\frac{1}{3600} \frac{\beta_{1,0,num}}{A}, \quad \beta_{1,1} = \frac{1}{1800} \frac{\beta_{1,1,num}}{A}, \quad \beta_{2,0} = -\frac{1}{18} \frac{\beta_{2,0,num}}{A}, \quad \beta_{2,1} = \frac{-1}{36} \frac{\beta_{2,1,num}}{A},$$

where $A = v^4(28\cos^3 v + 48\cos^2 v + 25\cos v + 4)$ and

$$\begin{aligned} \beta_{1,0,num} &= 10935 \cos(3v) + 5440 \cos(5v) \cos(3v) - 12000 \cos(3v) \cos(v) - 4375 \cos(3v) \cos(4v) \\ &+ 38250 \cos(v) \cos(4v) + 2187 \cos(5v) - 42 \cos(v) - 32768 \cos(4v) \\ &- 1107 \cos(5v) \cos(4v) - 26208 \cos(5v) \cos(v), \end{aligned}$$

$$\beta_{1,1,num} = 35(\cos^2 v - 4 \cos v - 31) \cos v,$$

$$\beta_{2,0,num} = 70 \cos^5 v - 123 \cos^3 v - 18 \cos^2 v + 55 \cos v + 16,$$

$$\beta_{2,1,num} = 7 \cos^3 v - 8 \cos^2 v - 5 \cos v + 6.$$

The Taylor series expansions, used when $v \rightarrow 0$ are given below

$$\begin{aligned} \beta_{1,0} &= \frac{11}{252} + \frac{59}{10584} v^2 - \frac{157}{444528} v^4 - \frac{69301}{124467840} v^6 - \frac{20437283}{78414739200} v^8 \\ &- \frac{636568907}{6586838092800} v^{10} - \frac{2135266381189}{65934249308928000} v^{12} - \dots, \end{aligned}$$

$$\begin{aligned} \beta_{1,1} &= \frac{115}{126} - \frac{59}{5292} v^2 + \frac{157}{222264} v^4 + \frac{69301}{62233920} v^6 - \frac{590503}{7841473920} v^8 \\ &+ \frac{97256377}{36227609510400} v^{10} - \frac{32506309663}{65934249308928000} v^{12} - \dots, \end{aligned}$$

$$\beta_{2,0} = -\frac{13}{15120} - \frac{59}{127008}v^2 - \frac{97049}{533433600}v^4 - \frac{280529}{4480842240}v^6 - \frac{189458741}{9409768704000}v^8 - \frac{1802008091}{289820876083200}v^{10} - \frac{4552039054177}{2434495359098880000}v^{12} - \dots,$$

$$\beta_{2,1} = \frac{313}{7560} - \frac{295}{63504}v^2 + \frac{191249}{266716800}v^4 + \frac{21115}{448084224}v^6 + \frac{77372441}{4704884352000}v^8 + \frac{109705741}{28982087608320}v^{10} + \frac{14524363782301}{15824219834142720000}v^{12} + \dots,$$

The local truncation error for symmetric, Obrechhoff two-step method with zero phase-lag is given by

$$\begin{aligned} LTE_{ZeroPL} &= (1 - \beta_{1,1} - 2\beta_{1,0})y_n^{(2)}h^2 - \left(-\frac{1}{12} + \beta_{1,0} + \beta_{2,1} + 2\beta_{2,0}\right)y_n^{(4)}h^4 \\ &- \frac{1}{360}(30\beta_{1,0} + 360\beta_{2,0} - 1)y_n^{(6)}h^6 - \frac{1}{360}\left(-\frac{1}{56} + 30\beta_{2,0} + \beta_{1,0}\right)y_n^{(8)}h^8 \\ &- \frac{1}{20160}\left(-\frac{1}{90} + 56\beta_{2,0} + \beta_{1,0}\right)y_n^{(10)}h^{10} + O(h^{12}) \end{aligned}$$

where $v = \omega h$, ω is the frequency and h is the step length.

2.1. THE FIRST FORMULA

If $P = 0$, $K = 7$, so we called PL^m , we have

$$\beta_{1,0} = -\frac{1}{30v^2} \frac{\beta_{1,0,num}}{A}, \quad \beta_{1,1} = \frac{1}{15v^2} \frac{\beta_{1,1,num}}{A}, \quad \beta_{2,0} = \frac{1}{120v^2} \frac{\beta_{2,0,num}}{A}, \quad \beta_{2,1} = \frac{1}{60v^2} \frac{\beta_{2,1,num}}{A},$$

$$A = -12 + 12 \cos v + v^2 \cos v + 5v^2,$$

and

$$\beta_{1,0,num} = -18v^2 + v^4 \cos v + 14v^4 - 360 \cos v + 360,$$

$$\beta_{1,1,num} = 18v^2 \cos v + 61v^4 + -360 \cos v - 360 + 14v^4 \cos v,$$

$$\beta_{2,0,num} = 4v^2 \cos v - 3v^4 + 56v^2 + 120 \cos v - 120,$$

$$\beta_{2,1,num} = 244v^2 + 56v^2 \cos v + 3v^4 \cos v + 600 \cos v - 600.$$

For small values of ν the above formulae are subject to heavy cancelations. In this case the following Taylor series expansion must be used:

$$\begin{aligned} \beta_{1,0} &= \frac{11}{252} + \frac{59}{317520} \nu^2 + \frac{233}{88016544} \nu^4 + \frac{451037}{14417109907200} \nu^6 + \frac{111679}{363311169661440} \nu^8 \\ &\quad + \frac{1010455379}{428016888978142464000} \nu^{10} + \frac{159482401}{15764191264825739366400} \nu^{12} + \dots, \\ \beta_{1,1} &= \frac{115}{126} - \frac{59}{158760} \nu^2 - \frac{233}{44008272} \nu^4 - \frac{451037}{7208554953600} \nu^6 - \frac{111679}{18165558483072020} \nu^8 \\ &\quad - \frac{1010455379}{214008444489071232000} \nu^{10} - \frac{159482401}{7882095632412869683200} \nu^{12} + \dots, \\ \beta_{2,0} &= -\frac{13}{15120} - \frac{59}{3810240} \nu^2 - \frac{233}{1056198528} \nu^4 - \frac{451037}{173005318886400} \nu^6 - \frac{111679}{4359734035937280} \nu^8 \\ &\quad - \frac{1010455379}{5136202667737709568000} \nu^{10} - \frac{159482401}{189170295177908872396800} \nu^{12} + \dots, \\ \beta_{2,1} &= \frac{313}{7560} - \frac{59}{3810240} \nu^2 - \frac{1156}{528099264} \nu^4 - \frac{451037}{17300531888640} \nu^6 - \frac{111679}{435973403593728} \nu^8 \\ &\quad - \frac{1010455379}{513620266773770956800} \nu^{10} - \frac{159482401}{18917029517790887239680} \nu^{12} + \dots, \end{aligned}$$

The phase-lag and the local truncation error for the PL''' , method are given by

$$\begin{aligned} LTE_{PL'''} &= (1 - \beta_{1,1} - 2\beta_{1,0}) y_n^{(2)} h^2 - \left(-\frac{1}{12} + \beta_{1,0} + \beta_{2,1} + 2\beta_{2,0} \right) y_n^{(4)} h^4 \\ &\quad - \frac{1}{360} (30\beta_{1,0} + 360\beta_{2,0} - 1) y_n^{(6)} h^6 - \frac{1}{360} \left(-\frac{1}{56} + 30\beta_{2,0} + \beta_{1,0} \right) y_n^{(8)} h^8 \\ &\quad - \frac{1}{20160} \left(-\frac{1}{90} + 56\beta_{2,0} + \beta_{1,0} \right) y_n^{(10)} h^{10} + O(h^{12}), \\ pl_{PL'''} &= \left| -\frac{1010455379}{205448106709508382720000} \nu^{16} + O(\nu^{18}) \right|, \\ LTE_{PL'''} &= \frac{59}{76204800} \left(D^{(10)} y(x) + \omega^2 D^{(8)} y(x) \right) h^{10}, \end{aligned}$$

where $\nu = \omega h$, ω is the frequency and h is the step length. The behavior of the coefficients of the PL''' method are shown in Figure 1. In Figure 2, we present the $s - \nu$ plane (stability region) for the method PL'' .

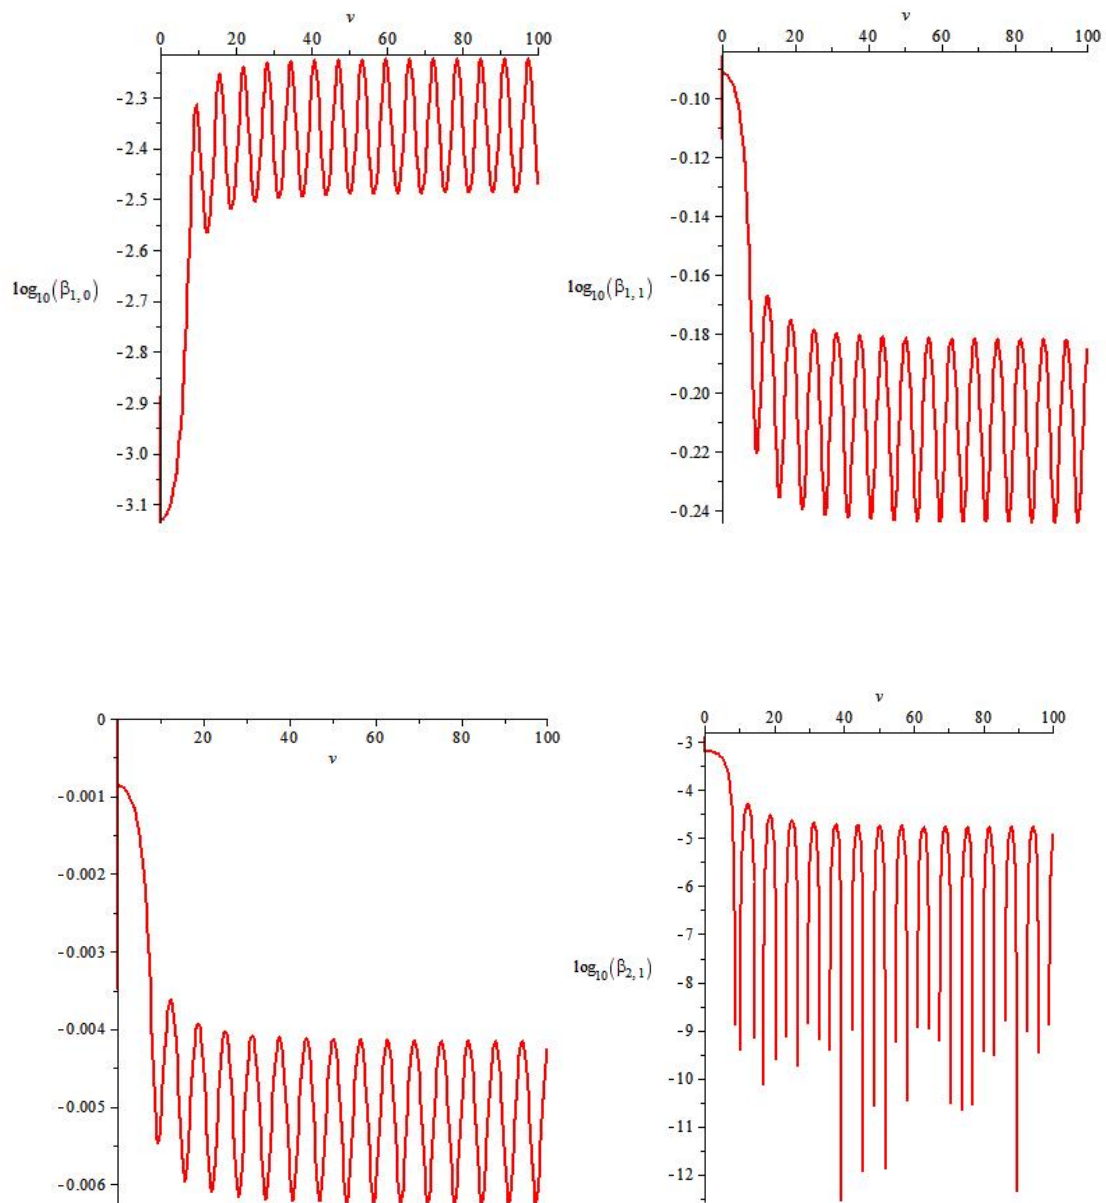


Figure 1. Behavior of the coefficients of the new proposed method PL''' for several values of $\nu = \omega h$.

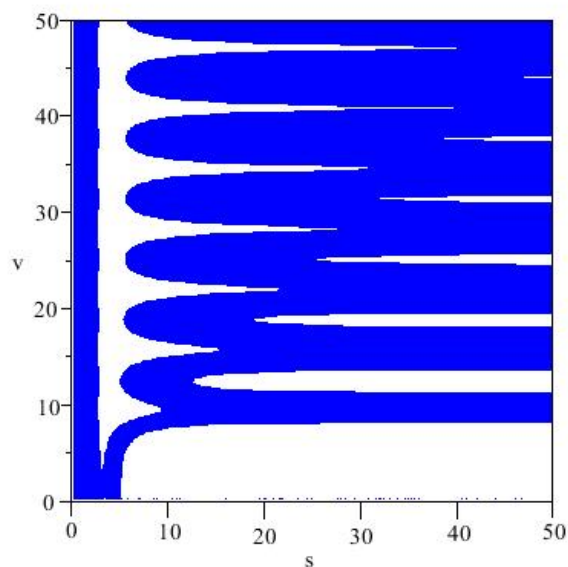


Figure 2. $s-v$ plane of the new obtained method PL''' .

2.2. THE SECOND FORMULA

If $P = 1$, $K = 5$, so we called PL'' , we have

$$\beta_{1,0} = \frac{14}{15} + 24\beta_{2,1}, \quad \beta_{1,1} = \frac{1}{30} - 12\beta_{2,1}, \quad \beta_{2,0} = \frac{1}{20} + 10\beta_{2,1},$$

$$\beta_{2,1} = \frac{1}{120} \frac{-3v^4 + 4v^2 \cos v + 56v^2 - 120 + 120 \cos v}{v^2(5v^2 + v^2 \cos v + 12 \cos v - 12)},$$

For small values of v the above formulae are subject to heavy cancelations. In this case the following Taylor series expansion must be used:

$$\beta_{1,0} = \frac{11}{252} + \frac{59}{63504}v^2 + \frac{2297}{88016544}v^4 + \frac{3600761}{2883421981440}v^6 + \frac{25113727}{363311169661440}v^8$$

$$+ \frac{13102592879}{3424135111825139712}v^{10} + \frac{43167790232461}{204934486442734611763200}v^{12} + \dots,$$

$$\beta_{1,1} = \frac{115}{126} - \frac{59}{31752}v^2 - \frac{2297}{44008272}v^4 - \frac{3600761}{1441710990720}v^6 - \frac{25113727}{18165558483072020}v^8$$

$$- \frac{13102592879}{1712067555912569856}v^{10} - \frac{43167790232461}{102467243221367305881600}v^{12} + \dots,$$

$$\beta_{2,0} = -\frac{13}{15120} - \frac{59}{762048}v^2 - \frac{139199}{26404963200}v^4 - \frac{11233841}{34601063777280}v^6 - \frac{2072169709}{108993350898432000}v^8 \\ - \frac{222352522039}{205448106709508382720}v^{10} - \frac{745610462460887}{12296069186564076705792000}v^{12} + \dots,$$

$$\beta_{2,1} = \frac{313}{7560} - \frac{295}{381024}v^2 - \frac{205351}{13202481600}v^4 - \frac{2074145}{3460106377728}v^6 - \frac{1694889341}{54496675449216000}v^8 \\ - \frac{170725264331}{102724053354754191360}v^{10} - \frac{549423244512943}{6148034593282038352896000}v^{12} + \dots,$$

The phase-lag and the local truncation error for the PL^m , method are given by

$$pl_{PL^m} = -\frac{3328231}{8719468071874560}v^{14} + O(v^{16}),$$

and

$$LTE_{PL^m} = \frac{59}{76204800} \left(4\omega^4 D^{(6)}y(x) + D^{(10)}y(x) + 5\omega^2 D^{(8)}y(x) \right) h^{10},$$

where $v = \omega h$, ω , is the frequency and h , is the step length. The behavior of the coefficients of the PL^m , method are shown in Fig. 3. In Fig. 4 we present the $s-v$ plane (stability region) for the method PL^m .

The characteristic equation $\Omega(s : v^2) = A(v)s^2 - 2B(v)s + A(v) = 0$ has complex roots of unit magnitude when

$$|\cos(\theta(v))| = \left| \frac{B(v)}{A(v)} \right| < 1, \text{ or } A(v)^2 \pm B(v)^2 > 0.$$

Substituting $A(v)$ and $B(v)$ for these the two-step methods, the interval of periodicity of the classical Obrechhoff method, PL^m and PL^m methods when $\sigma \rightarrow 0$ or $v \rightarrow 0$ are obtained [0, 25.2004], [0,36.7236] and [0,134.56] , respectively.

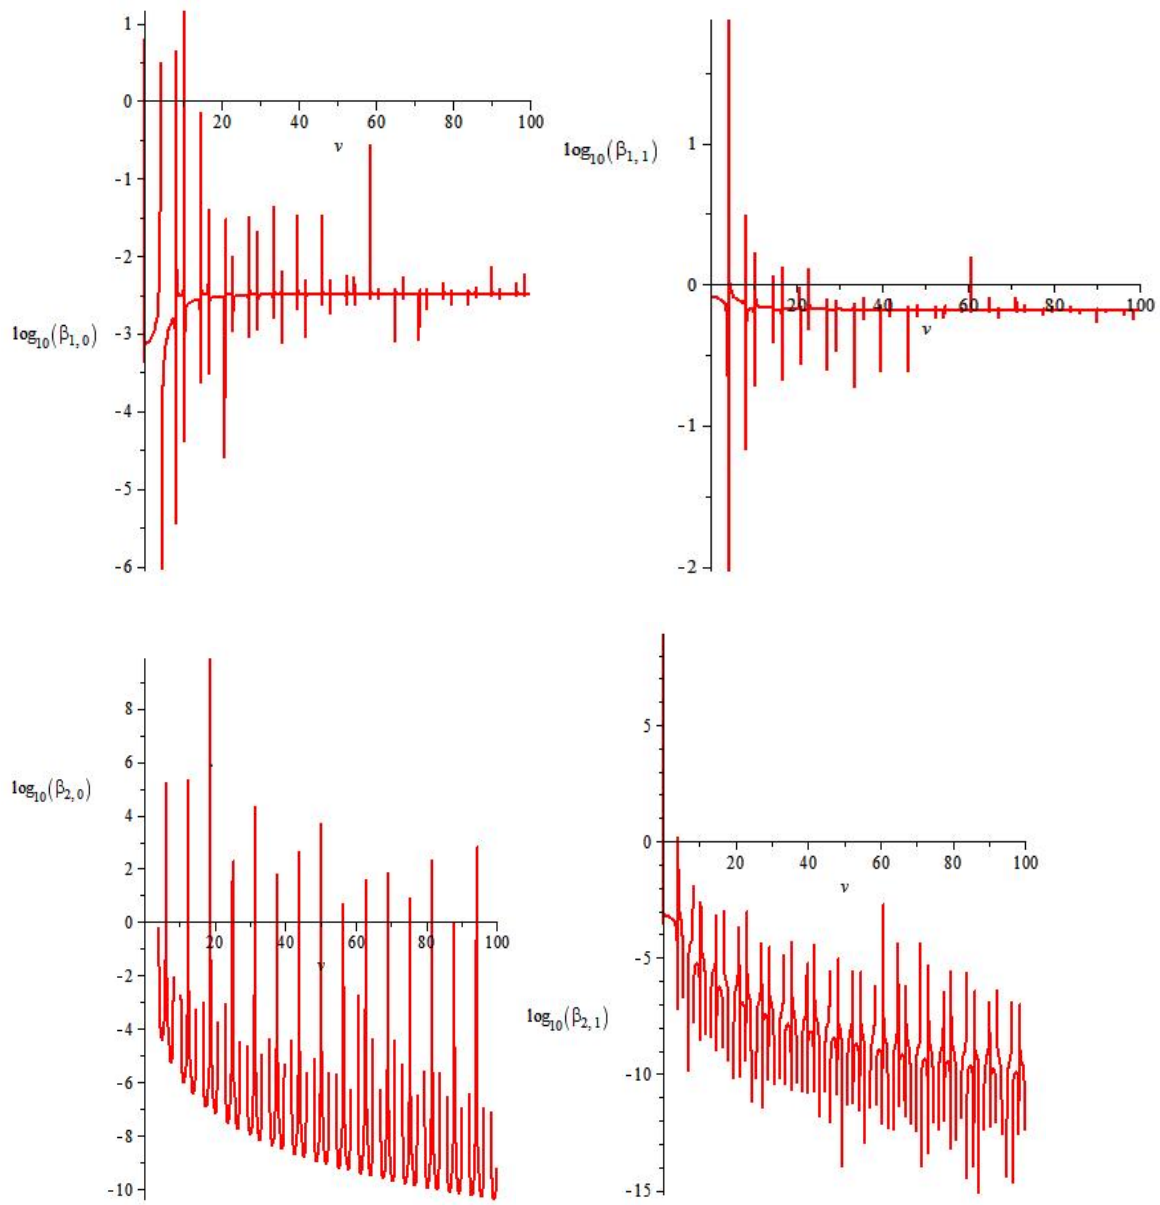


Figure 3. Behavior of the coefficients of the new proposed method PL'' for several values of $\nu = \omega h$.

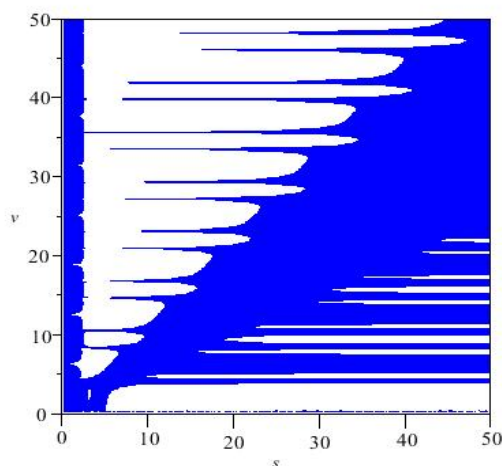


Figure 4. $s-v$ plane of the the new obtained method PL''.

3. NUMERICAL EXAMPLES

In this section, we present some numerical results obtained by our new two-step trigonometrically-fitted Obrechhoff methods and compare them with those from other multistep methods as

Simos: The 12th order Obrechhoff method of Simos [24].

Daele: The 12th order Obrechhoff method of Van Daele [26].

Achar: The 8th order Obrechhoff method of Achar [1].

Wang: The 12th order Obrechhoff method of Wang [30].

Example 3.1. We consider the nonlinear undamped Duffing equation

$$y'' = -y - y^3 + B \cos(\omega x), \quad y(0) = 0.200426728067, \quad y'(0) = 0, \quad (12)$$

Where $B = 0.002$, $\omega = 1.01$ and $x \in \left[0, \frac{40.5\pi}{1.01}\right]$. We use the following exact solution for

(12), $g(x) = \sum_{i=0}^3 K_{2i+1} \cos((2i+1)\omega x)$, where

$$\{K_1, K_3, K_5, K_7\} = \{ 0.200179477536, 0.246946143 \times 10^{-3}, \\ 0.304016 \times 10^{-6}, 0.374 \times 10^{-9} \} .$$

Table 1: Comparison of the end-point absolute error in the approximations obtained by using Methods: the classical method, methods of Simos, Daele, Achar, Wang, zero phase-lag and the new methods for Example 3.1.

h	PL'''	PL''	Classic	Zero PL	Simos	Daele	Achar	Wang
$\frac{M}{500}$	1.81e-10	9.31e-11	1.05e-5	1.42e-6	3.15e-4	4.06e-5	4.09e-5	4.08e-5
$\frac{M}{1000}$	8.02e-12	8.03e-12	2.35e-6	1.44e-6	1.81e-5	1.87e-6	1.27e-6	1.27e-6
$\frac{M}{2000}$	5.52e-12	5.52e-12	2.97e-6	1.79e-6	1.08e-6	3.83e-8	3.94e-8	3.93e-8
$\frac{M}{3000}$	7.28e-12	7.28e-12	7.88e-6	2.26e-6	2.09e-7	5.13e-9	5.18e-9	5.17e-9
$\frac{M}{4000}$	6.99e-12	6.99e-12	2.02e-7	1.93e-7	6.55e-8	3.19e-9	1.23e-9	1.23e-9
$\frac{M}{5000}$	6.65e-12	6.65e-12	5.95e-7	2.81e-7	2.67e-8	9.89e-10	4.09e-10	4.07e-10

In order to integrate this equation by a Obrechhoff method, one needs the values of y' , which occur in calculating $y^{(4)}$. These higher order derivatives can all be expressed in terms of $y(x)$ and $y'(x)$ through (12), i.e.

$$y^{(3)}(x) = -(1 + 3y^2(x))y'(x) - B\omega \sin(\omega x),$$

$$y^{(4)}(x) = -(1 + 3y^2(x))y''(x) - 6y(x)y'(x)^2 - B\omega^2 \cos(\omega x),$$

The absolute errors at $x = 40.5\pi/(1.01)$, for the new method, in comparison with methods of classical method, zero phase-lag method, Simos, Daele, Achar, Wang and the new methods are given in table 1 and the CPU times are listed in Table 2.

Example 3.2. Consider the initial value problem $y'' = -100y + 99\sin(x)$, $y(0) = 1, y'(0) = 11$, with the exact solution $y(t) = \sin(t) + \sin(10t) + \cos(10t)$. This equation has been solved numerical for $0 \leq x \leq 10\pi$ using exact starting values. In the numerical experiment, we take the step lengths $h = \pi/50, \pi/100, \pi/200, \pi/300, \pi/400$ and $\pi/500$. In Table 3, we present the absolute errors at the end-point and the CPU times are listed in Table 4.

Example 3.3. Consider the initial value problem

$$y'' = \frac{8y^2}{1+2x}, y(0) = 1, y'(0) = -2, x \in [0,4.5],$$

Table 2: CPU time for the example 3.1, are calculated for comparison among eight methods: the classical method, methods of Simos, Daele, Achar, Wang, zero phase-lag and the new methods.

h	PL'''	PL''	Classic	Zero PL	Simos	Daele	Achar	Wang
$\frac{M}{500}$	1.1	1.1	1.1	1	1.4	1.5	1.2	1.4
$\frac{M}{1000}$	2.2	2.1	2.2	2.2	2.9	2.9	2.3	2.9
$\frac{M}{2000}$	4.3	4.6	4.4	4.4	6.2	6.3	4.8	6.2
$\frac{M}{3000}$	7.2	7.8	7.5	7.5	9.8	9.7	7.5	9.5
$\frac{M}{4000}$	10	10.6	9.8	10	13.5	13.3	10	13
$\frac{M}{5000}$	12	13.3	14	13	17	17	12.9	16.5

Table 3: Comparison of the end-point absolute error in the approximations obtained by using Methods: the classical method, methods of Simos, Daele, Achar, zero phase-lag and the new methods for Example 3.2.

h	PL'''	PL''	Classic	Zero PL	Simos	Daele	Achar
$\frac{\pi}{50}$	9.63e-16	1.82e-10	3.03e-06	2.76e-04	3.05e-11	1.20e-11	5.79e-13
$\frac{\pi}{100}$	1.47e-19	1.10e-14	1.15e-08	2.76e-07	2.28e-13	7.34e-13	5.79e-13
$\frac{\pi}{200}$	9.07e-23	7.02e-19	4.50e-11	2.72e-10	4.40e-13	8.62e-13	1.32e-12
$\frac{\pi}{300}$	1.44e-24	2.73e-21	1.76e-12	4.74e-12	2.11e-12	2.63e-12	1.96e-12
$\frac{\pi}{400}$	4.77e-26	5.98e-23	1.76e-13	2.67e-13	1.38e-12	2.93e-12	4.78e-12
$\frac{\pi}{500}$	4.14e-27	3.44e-24	2.95e-14	2.87e-14	6.46e-12	2.89e-12	7.50e-12

Table 4: CPU time for the example 3.2, are calculated for comparison among seven methods: the classical method, methods of Simos, Daele, Achar, zero phase-lag and the new methods.

h	PL'''	PL''	Classic	Zero PL	Simos	Daele	Achar
$\frac{\pi}{50}$	0.14	0.23	0.12	0.11	0.17	0.25	0.19
$\frac{\pi}{100}$	0.44	0.37	0.33	0.45	0.51	0.53	0.45
$\frac{\pi}{200}$	0.89	0.87	0.9	0.89	0.86	0.83	0.75
$\frac{\pi}{300}$	1.35	1.3	1.4	1.3	1.14	1.15	0.95
$\frac{\pi}{400}$	1.8	1.8	1.9	1.8	1.39	1.40	1.23
$\frac{\pi}{500}$	2.3	2.3	2.3	2.3	1.70	1.78	1.47

Table 5: Comparison of the end-point absolute error in the approximations obtained by using Methods: the classical method, methods of Simos, Daele, Achar, Wang, zero phase-lag and the new methods for Example 3.3.

h	PL'''	PL''	Classic	Zero PL	Simos	Daele	Achar	Wang
$\frac{4.5}{500}$	6.61e-14	6.72e-14	1.85e-06	1.52e-06	1.24e-7	1.26e-7	1.26e-7	1.24e-7
$\frac{4.5}{1000}$	4.81e-16	4.88e-16	1.65e-06	1.45e-06	3.82e-9	3.90e-9	3.85e-9	3.82e-9
$\frac{4.5}{2000}$	2.60e-18	2.63e-18	3.94e-07	1.41e-06	1.19e-10	1.23e-10	1.20e-10	1.19e-10
$\frac{4.5}{3000}$	1.13e-19	1.15e-19	3.76e-07	2.67e-07	1.92e-11	2.02e-11	1.40e-11	1.92e-11
$\frac{4.5}{4000}$	1.20e-20	1.21e-20	3.05e-08	2.56e-07	7.85e-12	7.85e-12	2.68e-12	7.85e-12
$\frac{4.5}{5000}$	2.07e-21	2.10e-21	2.71e-08	1.31e-08	1.63e-12	1.63e-12	7.47e-14	1.63e-12

Table 6: CPU time for the example 3.3, are calculated for comparison among eight methods: the classical method, methods of Simos, Daele, Achar, Wang, zero phase-lag and the new methods.

h	PL'''	PL''	Classic	Zero PL	Simos	Daele	Achar	Wang
$\frac{4.5}{500}$	0.19	0.19	0.2	0.17	0.369	0.34	0.19	0.31
$\frac{4.5}{1000}$	0.44	0.34	0.37	0.39	0.62	0.61	0.76	1.23
$\frac{4.5}{2000}$	0.83	0.72	0.72	0.75	0.62	0.61	0.76	1.23
$\frac{4.5}{3000}$	1.1	1.1	1	1.1	1.23	1.92	1.20	1.87
$\frac{4.5}{4000}$	1.5	1.4	1.5	1.4	1.89	2.59	1.62	2.56
$\frac{4.5}{5000}$	1.8	1.8	1.8	1.8	2.59	3.29	2.06	3.24

with the exact solution

$$y(x) = \frac{1}{1+2x}.$$

The absolute errors at $x = 4.5$ for the new methods, in comparison with methods of Wang, Simos, Daele, Achar, classical method and zero phase-lag method are given in Table 5. The relative CPU times of computation of the new methods in comparison with the other six our referred methods are given in Table 6.

4. CONCLUSIONS

In this paper, we have presented the new trigonometrically-fitted two-step symmetric Obrechhoff method of order 8. The details of the procedure adapted for the applications have been given in Section 2. With trigonometric fitting, we have improved the local truncation error, phase-lag error, interval of periodicity and CPU time for the classes of two-step Obrechhoff methods. The numerical results obtained by the new method for some problems show its superiority in efficiency, accuracy and stability.

ACKNOWLEDGMENTS. The authors wish to thank the anonymous referees for their careful reading of the manuscript and their fruitful comments and suggestions.

REFERENCES

1. Achar, S. D., Symmetric multistep Obrechhoff methods with zero phase-lag for periodic initial value problems of second order differential equations, *J. Appl. Math. Comput.* **218** (2011) 2237–2248.
2. Alolyan, I., Simos, T. E., Multistep methods with vanished phase-lag and its first and second derivatives for the numerical integration of the Schrödinger equation, *J. Math. Chem.* **48** (4) (2010) 1092–1143.
3. Ananthakrishnaiah, U. A., P-stable Obrechhoff methods with minimal phase-lag for periodic initial value problems, *Math. Comput.* **49** (1987) 553–559.
4. Chawla, M. M., Rao, P. S., A Numerov-type method with minimal phase-lag for the integration of second order periodic initial value problems. ii: Explicit method, *J. Comput. Appl. Math.* **15** (1986) 329–337.
5. Dahlquist, G., On accuracy and unconditional stability of linear multistep methods for second order differential equations, *BIT* **18** (2) (1978) 133–136.
6. Franco, J. M., An explicit hybrid method of Numerov type for second-order periodic initial-value problems, *J. Comput. Appl. Math.* **59** (1995) 79–90.
7. Franco, J. M., Palacios, M., High-order P-stable multistep methods, *J. Comput. Appl. Math.* **30** (1) (1990) 1–10.
8. Gautschi, W., Numerical integration of ordinary differential equations based on trigonometric polynomials, *Numer. Math.* **3** (1961) 381–397.
9. Hairer, I. E., Unconditionally stable methods for second order differential equations, *Numer. Math.* **32** (1979) 373–379.
10. Henrici, P., *Discrete variable methods in ordinary differential equations*. Wiley, New York (1962).
11. Ixaru, L. Gr., Rizea, M., A Numerov-like scheme for the numerical solution of the Schrödinger equation in the deep continuum spectrum of energies, *Comput. Phys. Commun.* **19** (1) (1980) 23–27.
12. Jain, M. K., Jain, R. K. and Krishnaiah, U. A., Obrechhoff methods for periodic initial value problems of second order differential equations, *J. Math. Phys.* **15** (1981) 239–250.
13. Lambert, J. D., *Numerical methods for ordinary differential systems, The Initial Value Problem*, John Wiley and Sons, (1991).
14. Lambert, J. D., Watson, I. A., Symmetric multistep methods for periodic initial value problems, *J. Inst. Math. Appl.* **18** (1976) 189–202.
15. Neta, B., P-stable symmetric super-implicit methods for periodic initial value problems, *Comput. Math. Appl.* **50** (2005) 701–705.
16. Quinlan, G. D., Tremaine, S., Symmetric multistep methods for the numerical integration of planetary orbits, *The Astro. J.* **100** (5) (1990) 1694–1700.
17. Ramos, H., Vigo-Aguiar, J., On the frequency choice in trigonometrically fitted methods, *Appl. Math. Lett.* **23** (11) (2010) 1378–1381.
18. Raptis, A. D., Allison, A. C., Exponential-fitting methods for the numerical solution of the Schrödinger equation, *Comput. Phys. Commun.* **14** (1978) 1–5.

19. Raptis, A. D., Exponentially-fitted solutions of the eigenvalue Schrödinger equation with automatic error control, *Comput. Phys. Commun.* **28** (1983) 427–431.
20. Saldanha, G., Achar, S. D., Symmetric multistep Obrechhoff methods with zero phase-lag for periodic initial value problems of second order differential equations, *J. Appl. Math. Comput.* **218** (2011) 2237–2248.
21. Shokri, A., The symmetric two-step P-stable nonlinear predictor-corrector methods for the numerical solution of second order initial value problems, *Bull. Iran. Math. Soc.*, in press.
22. Shokri, A., Saadat, H., Trigonometrically fitted high-order predictor-corrector method with phase-lag of order infinity for the numerical solution of radial Schrödinger equation, *J. Math. Chem.* **52** (7) (2014) 1870–1894.
23. Shokri, A., Saadat, H., High phase-lag order trigonometrically fitted two-step Obrechhoff methods for the numerical solution of periodic initial value problems, *Numer. Algor.* DOI: 10.1007/s11075-014-9847-7.
24. Simos, T. E., A P-stable complete in phase Obrechhoff trigonometric fitted method for periodic initial value problems, *Proc. R. Soc.* **441** (1993) 283–289.
25. Steifel, E., Bettis, D. G., Stabilization of Cowells methods, *Numer. Math.* **13** (1969) 154–175.
26. Van Daele, M., Vanden Berghe, G., P-stable exponentially fitted Obrechhoff methods of arbitrary order for second order differential equations, *Numer. Algor.* **46** (2007) 333–350.
27. Vanden Berghe, G., Van Daele, M., Trigonometric polynomial or exponential fitting approach, *J. Comput. Appl. Math.* **233** (2009) 969–979.
28. Wang, Z., Wang, Y., A new kind of high efficient and high accurate P-stable Obrechhoff three-step method for periodic initial value problems, *Comput. Phys. Commun.* **171** (2) (2005) 79–92.
29. Wang, Z., Zhao, D., Dai, Y. and Song, X., A new high efficient and high accurate Obrechhoff four-step method for the periodic non-linear undamped duffings equation, *Comput. Phys. Commun.* **165** (2005) 110–126.
30. Wang, Z., Zhao, D., Dai, Y. and Wu, D., An improved trigonometrically fitted P-stable Obrechhoff method for periodic initial value problems, *Proc. R. Soc.* **461** (2005) 1639–1658.